

Udara, S. P. R. Arachchige et al.

**Article**

## Simulation of carbon dioxide capture for industrial applications

Energy Reports

**Provided in Cooperation with:**

Elsevier

*Suggested Citation:* Udara, S. P. R. Arachchige et al. (2020) : Simulation of carbon dioxide capture for industrial applications, Energy Reports, ISSN 2352-4847, Elsevier, Amsterdam, Vol. 6, Iss. 2, pp. 659-663,  
<https://doi.org/10.1016/j.egy.2019.11.134>

This Version is available at:

<https://hdl.handle.net/10419/243947>

**Standard-Nutzungsbedingungen:**

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

**Terms of use:**

*Documents in EconStor may be saved and copied for your personal and scholarly purposes.*

*You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.*

*If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.*



<https://creativecommons.org/licenses/by-nc-nd/4.0/>

The 6th International Conference on Power and Energy Systems Engineering (CPESE 2019),  
20–23 September 2019, Okinawa, Japan

## Simulation of carbon dioxide capture for industrial applications

S.P.R. Arachchige Udara\*, Rasenthiran Kohilan, M.A.L. Lakshan, M.K.  
Lakshitha Madalagama, P.R. Prabhath Pathirana, P.W. Sakuna Sandupama

*Faculty of Technology, University of Sri Jayewardenepura, Nugegoda, Sri Lanka*

Received 12 October 2019; accepted 23 November 2019

---

### Abstract

Carbon dioxide emissions to the atmosphere are drastically increased due to fossil fuel-based power plants and different kinds of industrial processes. Carbon capture is essential to maintain a better environment. Flue gas emissions from the coal-fired power plant, gas-fired power plant, cement manufacturing industry as well as the aluminium production industry are considered for the present study. Carbon dioxide capture model is developed and implemented in Aspen Plus to calculate the regeneration energy requirement. The regeneration energy requirement in the stripping process in the carbon capture is calculated as 3634, 3781, 3229 and 3085 kJ/kg respectively for coal, gas, cement, and aluminium production process flue gas treating.

© 2019 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 6th International Conference on Power and Energy Systems Engineering (CPESE 2019).

*Keywords:* Carbon capture; Aspen plus; Simulation; Regeneration energy; Flue gas

---

### 1. Introduction

Carbon dioxide (CO<sub>2</sub>) is known as a greenhouse gas (GHG) which absorb and emit thermal radiation. The CO<sub>2</sub> concentration in the atmosphere has rapidly risen after the industrial revolution [1]. CO<sub>2</sub> is the main anthropogenic contributor for greenhouse gas effect as a result of a major contribution to the temperature rising. CO<sub>2</sub> is produced in large quantities by many industries which can be mainly naming as coal and gas-fired power plants, steel production, cement production, chemical and petrochemical production, etc. [2]. There are several methods that have been suggested by the scientists, including switching to the green energy (wind power, solar power), improving process efficiency of the power plants, and capturing CO<sub>2</sub> emissions of the power plants and industries [3]. However, the most realistic option will remain as the carbon capture and storage (CCS) for several decades to maintain the green environment [4]. CCS technology is not widely applicable due to the high energy consumption of the regeneration process. The main idea behind this research study is to develop and implement a CO<sub>2</sub> capture process model to minimize the regeneration energy requirement in the CO<sub>2</sub> mitigation process.

---

\* Corresponding author.

*E-mail address:* [udara@sjp.ac.lk](mailto:udara@sjp.ac.lk) (S.P.R.A. Udara).

<https://doi.org/10.1016/j.egy.2019.11.134>

2352-4847/© 2019 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 6th International Conference on Power and Energy Systems Engineering (CPESE 2019).

---

The post-combustion chemical absorption process is the most viable technique to capture flue gas carbon dioxide. The acid gas mainly  $\text{CO}_2$  can be chemically captured with amine solvents by the post-combustion process. The captured  $\text{CO}_2$  with amine solvent can be regenerated to collect as purified  $\text{CO}_2$  using steam as the medium for the regeneration process. However, with the current situation, the main drawback of the technology is the high amount of energy requirement in the regeneration process. Therefore, reduction of energy requirement in the carbon capture process is necessary to be implemented in the industries and power plants to achieve a green environment.

## 2. Model development

The carbon capture model is developed for flue gas stream from 500 MW coal and gas-fired power plants, Cement industry as well as for aluminium production industry. The conditions of the flue gas stream are given in Table 1, which is taken from the literature coal-fired power plant [5], Gas fired power plant [6], Cement industry [7], and Aluminium industry [1].


Aspen Plus rate based model is used to develop the comprehensive process flow sheet (Fig. 1).

The process flow diagram is developed to capture 85% of  $\text{CO}_2$  from the flue gas stream. Absorber and stripper are considered as the main two-unit operation blocks in the capture process. Inlet flue gas and the solvent are supplied at 313 K, and absorption process is performed at 1 bar pressure for optimum operation. The rich solvent leaving the bottom of the absorber column is heated up to 382 K using a heat exchanger unit before sending it to the stripper section. The stripper is operating at 2 bar absolute pressure. The solvent stream is selected based on previous studies [8]. The solvent stream condition which is used to perform the simulation studies is given in Table 2.

The amine-based carbon capture process is implemented in Aspen Plus process simulation software as shown in Fig. 1. Monoethanolamine (MEA) is considered as the solvent which is used for the absorption process. The main drawback of the MEA based carbon capture process is a high amount of energy requirement in the regeneration process, that is the re-boiler duty in the stripper column. Hence, the optimization of the capture plant is required

**Table 1.** Flue gas composition and parameters.

| Parameter            | Coal fired power plant | Gas fired power plant | Cement industry | Aluminium industry |
|----------------------|------------------------|-----------------------|-----------------|--------------------|
| Flow rate (kg/s)     | 673.4                  | 793.9                 | 84.72           | 112.1              |
| Temperature (K)      | 313                    | 313                   | 433             | 498                |
| Pressure (bar)       | 1.1                    | 1.1                   | 1.013           | 1.1                |
| Major Compositions   | Mol%                   |                       |                 |                    |
| $\text{H}_2\text{O}$ | 8.18                   | 8.00                  | 7.2             | 1.0                |
| $\text{N}_2$         | 72.86                  | 76.00                 | 68.1            | 75.3               |
| $\text{CO}_2$        | 13.58                  | 4.00                  | 22.4            | 3.0                |
| $\text{O}_2$         | 3.54                   | 12.00                 | 2.3             | 20.7               |

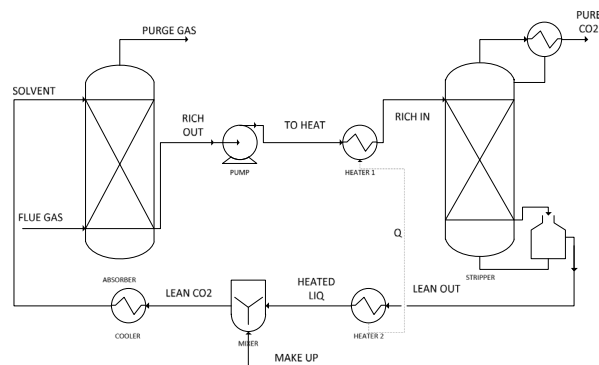

**Fig. 1.** Process flow diagram.

**Table 2.** Solvent stream parameters.

| Parameter  | Coal fired power plant | Gas fired power plant | Cement industry | Aluminium industry |
|--|------------------------|-----------------------|-----------------|--------------------|
| Flow rate (kg/s)   | 2212                   | 1048                  | 612             | 142                |
| CO <sub>2</sub> lean loading [mole CO <sub>2</sub> /mole MEA ] | 0.27                   | 0.30                  | 0.30            | 0.30               |
| Solvent concentration (w/w%)                                   | 40                     | 40                    | 40              | 40                 |

**Table 3.** Aspen Plus model specifications of absorber and stripper column.

| Specification                    | Parameter value                                  |  |
|----------------------------------|--|--|
|                                  | Absorber   | Stripper   |
| Number of stages                 | 15   | 15   |
| Operating pressure               | 1 bar  | 2 bar  |
| Re-boiler                        | None   | Kettle   |
| Condenser                        | None   | Partial-vapour                                   |
| Packing type                     | Mellapak, Sulzer, Standard, 250Y                 | Flexipac, Koch, metal, 1Y                        |
| Packing height                   | 20m  | 18m  |
| Packing diameter                 | 15m  | 12m  |
| Mass transfer coefficient        | Bravo et al. [11]                                | Bravo et al. [11]                                |
| Interfacial area method          | Bravo et al. [11]                                | Bravo et al. [11]                                |
| Interfacial area factor          | 1.5  | 2  |
| Heat transfer coefficient method | Chilton and Colburn                              | Chilton and Colburn                              |
| Holdup correlation               | Billet and Schultes [12]                         | Billet and Schultes [12]                         |
| Film resistance                  | Discrxn for liquid film and Film for vapour film | Discrxn for liquid film and Film for vapour film |
| Flow model                       | Mixed  | Mixed  |

to install the carbon capture process in real industrial applications. Absorber and Stripper packing conditions and operating parameters are selected from literature to perform the simulation studies [9,10]. The most important parameters are tabulated in Table 3.

### 2.1. Aspen plus

There are several simulation models available in the Aspen Plus. Due to several reasons, the Aspen Plus Rad-Frac model is finally chosen as the best operating model. Rad-Frac is considered as the most active unit operation model for vapour–liquid absorption and stripping section, faster simulation in comparison with other available options. Moreover, fewer convergence problems compared to other available options in Aspen Plus with high accuracy. It is important to select the property method in Aspen Plus to perform the calculation during the simulations [1,9,13]. Each unit operation model requires a property method to perform its calculation routes. Mainly, four different property methods are available in the Aspen Plus for CO<sub>2</sub>+MEA systems, which are:

ELECNRTL-handle both very low and high concentrations of aqueous and mixed solvent systems.

ENTRL-HF-similar to the ELECNRTL property method except that it uses the HF equation of state for vapour phase calculation model.

ENTRL-HG-similar to the ELECNRTL property method except it uses the Helgeson model for standard property calculations.

AMINES-this property method uses Kent–Eisenberg correlation for K-values and enthalpy calculation. Out of them, the ELECNRTL model is selected for the simulation of the CO<sub>2</sub> capture process for this study. The ELECNRTL is the most versatile electrolyte property method as it has the capability of handling both very low and high concentrations of aqueous and mixed solvent systems.

## 3. Chemistry of the amine + CO<sub>2</sub> reacting system

Carbon dioxide and monoethanolamine reacting system, CO<sub>2</sub> is solubilized in the liquid phase either as carbamate, carbonate or bicarbonate form. The most important chemical reactions are given in Eqs. (1)–(5) [14].


**Table 4.** Constant values of equilibrium constant equation (6).

| Parameter | Reaction 1 | Reaction 2 | Reaction 3 | Reaction 4 | Reaction 5 |
|-----------|------------|------------|------------|------------|------------|
| $A_j$     | -0.52      | 231.46     | 216.05     | -3.038     | 132.89     |
| $B_j$     | -2545.53   | -12092.1   | -12431.7   | -7008.3    | -13445.9   |
| $C_j$     | 0          | -36.78     | -35.48     | 0          | -22.47     |
| $D_j$     | 0          | 0          | 0          | -0.00313   | 0          |

**Table 5.** Re-boiler energy duty.

| Parameter              | Coal fired power plant | Gas fired power plant | Cement industry | Aluminium industry |
|------------------------|------------------------|-----------------------|-----------------|--------------------|
| Re-boiler duty [kJ/kg] | 3634                   | 3781                  | 3229            | 3085               |

Hydrolysis reaction:



Dissociation of dissolved carbon dioxide:



Dissociation of bicarbonate:



Dissociation of protonated MEA:



Ionization of water:



The mole fraction of each component is calculated using the above equations. The equilibrium constant which is required for the calculations have followed Eq. (6),

$$\ln K_j = A_j + \frac{B_j}{T} + C_j \ln T + D_j T \quad (6)$$

According to the literature [15], constants in Eq. (6) which are corresponding to Eqs. (1)–(5) are given in Table 4.

#### 4. Results and discussion

Sensitivity analysis is performed to identify the effect of the parameters on the CO<sub>2</sub> removal process. The most important factor is the regeneration energy requirement in the stripping column. The required regeneration energy is calculated based on the simulation studies for different industrial application. Four major industries (coal-fired power plant, gas-fired power plant, cement industry and aluminium industry) which mainly contribute to greenhouse gas emissions were considered for present simulation studies. The required re-boiler energy duty is given in Tables 1, 2, 3, 4 and 5 separately.

The regeneration energy requirement is changing according to the total flue gas flow rate as well as with the carbon dioxide composition in the flue gas stream. The highest regeneration energy is required for the gas-fired power plant flue gas capturing process, following coal-fired flue gas capturing process, cement industry and for the aluminium production process. At the same time, simulations are performed to identify the relationship between regeneration energy requirement and CO<sub>2</sub> removal efficiency. It can be clearly seen that the regeneration energy requirement is increasing gradually with the removal efficiency. The main reason behind that is, when the removal efficiency is gradually increased, the required solvent flow rate is increasing. The overall regeneration energy requirement consists of mainly three parts.

- The energy needed for liberating attached CO<sub>2</sub> from amines.
- The energy required to increase the solvent temperature.
- The energy required for the water evaporation process.

Moreover, the solvent concentration effect on CO<sub>2</sub> removal process also considered. It can be clearly seen that, with the increase of solvent concentration, the required solvent flow rate is gradually decreasing, therefore required regeneration energy for a stripper is decreasing. However, higher solvent concentration believes to have corrosive effects in all sections, in the capture plant.

## 5. Conclusion

This research mainly has focused on process modelling and simulation of CO<sub>2</sub> capture with the post-combustion chemical absorption process. The carbon capture model is developed and implemented in the Aspen Plus process simulation tool. The main problem of the post-combustion chemical absorption technology is a large amount of energy requirement in the re-generating sector. Therefore, the reduction of operating cost is important to achieve the removal process in flue gas treating. The model is developed in Aspen Plus process simulation tool to optimize the removal process. The Electrolyte NRTL (ELECNRTL) property method is used to handle the chemical reacting system. There are four different case studies considered for the simulation process which are, coal-fired power plant, gas-fired power plant, cement plant as well as the aluminium industry. The required re-boiler duty was calculated for every situation. The required regeneration energy is calculated as 3634, 3781, 3229 and 3085 kJ/kg respectively for coal, gas, cement and aluminium production process flue gas treating.

## References

- [1] Udara SPR Arachchige, Dinesh K, Morten CM. Simulation of carbon dioxide capture for aluminium production process. *Int J Model Optim* 2014;(4–1):43–50.
- [2] Sholeh Ma'mun. Selection and characterization of new absorbents for Carbon Dioxide capture (Ph.D thesis), Norway: NTNU; 2005.
- [3] Udara SPR Arachchige. Carbon dioxide capture by chemical absorption: energy optimization and analysis of dynamic viscosity of solvents (Ph.D. thesis), University of South-Eastern Norway; ISBN: 978-82-7206-516-3, 2019.
- [4] Anderson S, Newell R. Prospects for carbon capture and storage technologies. discussion paper. In: *Resources for the future*. 2003.
- [5] Alie CF. Co2 capture with MEA: intergrating the absorption process and steam cycle of an existing coal-fired power plant (Master thesis), Canada: University of Waterloo; 2004.
- [6] Fluor for IEA GHG Program. Improvement in power generation with post-combustion capture of CO<sub>2</sub>. In: *Final report*. 2004.
- [7] Nazmul HSM. Techno-economic study of CO<sub>2</sub> capture process for cement plants. (Master thesis), Ontario, Canada: University of Waterloo; 2005.
- [8] Udara SPRA, Muhammad M, Melaen MC. Optimization of post combustion carbon capture process-solvent selection. *Int J Energy Environ* 2012;(3–6):861–70 (submitted for publication).
- [9] Aspen Plus. Rate based model of the CO<sub>2</sub> capture process by MEA using aspen plus. Cambridge, MA, USA: Aspen Technology Inc; 2008.
- [10] Mohammad A. Carbon dioxide capture from flue gas (Ph.D. thesis), Netherland: University of Delft; 2009.
- [11] Bravo JL, Rocha JA, Fair JR. Mass transfer in gauze packing. *Hydrocarbon Process* 1985;January:91–5.
- [12] Billet R, Schultes M. Predicting mass transfer in packed columns. *Chem Eng Technol* 1993;(16):1–9.
- [13] Aspen Plus. Aspen physical property methods. Cambridge, MA, USA: Aspen Technology Inc; 2006, p. 61–3.
- [14] Freguia S. Modeling of CO<sub>2</sub> removal from flue gas with mono-ethanolamine (Master thesis), Austin, USA: University of Texas; 2002.
- [15] Liu Y, Zhang L, Watanasiri s. representing vapor-liquid equilibrium for an aqueous MEA-CO<sub>2</sub> system using the electrolyte nonrandom-two-liquid model. *Ind Eng Chem Res* 1999;38:2080–90.