

Busch, Marie; Sibbertsen, Philipp

Working Paper

An overview of modified semiparametric memory estimation methods

Hannover Economic Papers (HEP), No. 628

Provided in Cooperation with:

School of Economics and Management, University of Hannover

Suggested Citation: Busch, Marie; Sibbertsen, Philipp (2018) : An overview of modified semiparametric memory estimation methods, Hannover Economic Papers (HEP), No. 628, Leibniz Universität Hannover, Wirtschaftswissenschaftliche Fakultät, Hannover

This Version is available at:

<https://hdl.handle.net/10419/200640>

Standard-Nutzungsbedingungen:

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Terms of use:

Documents in EconStor may be saved and copied for your personal and scholarly purposes.

You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.

If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.

An Overview of Modified Semiparametric Memory Estimation Methods

Marie Busch and Philipp Sibbertsen,¹

Institute of Statistics, Faculty of Economics and Management,
Leibniz University Hannover, D-30167 Hannover, Germany

This version: March 6, 2018

Abstract

Several modified estimation methods of the memory parameter have been introduced in the past years. They aim to decrease the upward bias of the memory parameter in cases of low frequency contaminations or an additive noise component, especially in situations with a short-memory process being contaminated. In this paper, we provide an overview and compare the performance of nine semiparametric estimation methods. Among them are two standard methods, four modified approaches to account for low frequency contaminations and three procedures developed for perturbed fractional processes. We conduct an extensive Monte Carlo study for a variety of parameter constellations and several DGPs. Furthermore, an empirical application of the log-absolute return series of the S&P 500 shows that the estimation results combined with a long-memory test indicate a spurious long-memory process.

JEL-Numbers: C13, C14, C22

Keywords: Spurious Long Memory · Semiparametric estimation · Low frequency contamination · Perturbation · Monte Carlo simulation

¹Corresponding author:
Phone: +49-511-762-3783
Fax: +49-511-762-3923
E-Mail: sibbertsen@statistik.uni-hannover.de

1 Introduction

Over the last decades the long memory literature focusses on an effect called spurious long memory. This effect is characterized by a contaminated short-memory process exhibiting the typical properties of a long-memory process, such as a hyperbolically decaying autocorrelation function and an unbounded spectral density at the origin. Several types of contaminations exist and we follow the classification of [Hou and Perron \(2014\)](#). We distinguish between short-run and additive noise components which influence the bias and efficiency of the standard estimator in finite samples. Further, low frequency contaminations modeled by time trends and level shifts can cause inconsistent estimators and are a source of the aforementioned spurious long memory (cf. [Diebold and Inoue \(2001\)](#) or [Granger and Hyung \(2004\)](#)). [Haldrup and Nielsen \(2007\)](#) present strongly biased standard estimators for contaminated processes in their simulation study and emphasize the need of modified estimators. Besides the theoretical effects of low frequency contaminations, [McCloskey and Perron \(2013\)](#) emphasize the relevance to macroeconomic and financial applications.

Motivated by these findings several modified estimation methods of the memory parameter have been developed. In this survey paper we concentrate on semiparametric estimation methods and do not consider the literature of fully parametric estimation techniques, such as [McCloskey \(2013\)](#) or [McCloskey and Hill \(2017\)](#). Further, we omit semiparametric Fourier- and wavelet-based estimation approaches and refer to a survey paper of [Faÿ et al. \(2009\)](#).

Generally, all modified estimation methods aim to decrease the upward bias of the memory parameter in cases of low frequency contaminations or an additive noise component, especially in situations with a short-memory process being contaminated. Several types of modifications have been proposed in the literature and we compare the effects of a trimmed periodogram and an adjusted spectral density. The order of the periodogram differs from a typical long-memory process to a contaminated process. Therefore, by adding or replacing components of the original spectral density a so-called pseudo spectral density function is modeled (e.g., [Hou and Perron, 2014](#)). Alternatively, trimming the lower frequencies of a periodogram removes the high peak of the periodogram that is caused by the contamination. A common drawback of the modified estimators is the bias-variance trade-off which means that a bias reduction is combined with an increased variance.

To our knowledge, this is the first survey paper on semiparametric estimation methods of the memory parameter considering several types of contaminated processes. Usually, the authors of the modified estimation methods are comparing the results to the original non-modified estimation method. However, a comparison between different modified

estimation methods would be of great interest. Further, the simulation studies of the modified estimation procedures are often limited to a few data generating processes (DGPs) and to a small set of parameter constellations, except for [Hou and Perron \(2014\)](#). We contribute to this literature by providing an extensive Monte Carlo study for a variety of parameter constellations and several DGPs. Additionally, we review the performance of the estimation methods for perturbed fractional processes since the general idea is closely related to an additive noise component as it has been considered by [Hou and Perron \(2014\)](#).

The idea of the paper is to give an overview of different estimation methods of pure and contaminated short and long-memory processes and to compare them under several scenarios. We aim to provide some user-guidelines in the end or a recommendation on which method should be preferred or which one is performing most stable across the wide setup in the simulation study. In the following, we briefly introduce the estimation methods. Two widespread semiparametric estimation methods are considered for pure long-memory processes, the log-periodogram estimator (also known as GPH estimator) of [Geweke and Porter-Hudak \(1983\)](#) and the local Whittle estimation approach of [Kuensch \(1987\)](#). In this survey paper we compare the modified estimators of [Smith \(2005\)](#), [Iacone \(2010\)](#), [McCloskey and Perron \(2013\)](#) and [Hou and Perron \(2014\)](#). [Smith \(2005\)](#) develops a biased corrected version of the log-periodogram estimator by adding an additional regressor to the ordinary least squares regression equation. The trimming technique of [Iacone \(2010\)](#) is based on the local Whittle estimator whereas [McCloskey and Perron \(2013\)](#) use the GPH estimator. As stated by [Yamamoto and Perron \(2013\)](#) the high peaks in the periodogram at low frequencies induced by the level shifts or trends are robustly removed by the trimming procedure of [McCloskey and Perron \(2013\)](#) and [Iacone \(2010\)](#). Modifying the estimator of [Kuensch \(1987\)](#) by adding a term to the spectral density that considers the contaminated process results in the estimator of [Hou and Perron \(2014\)](#).

Additionally to the modified estimation methods of the memory parameter we consider three estimation methods for perturbed fractional processes. In contrast to a pure fractional process, the short-run dynamics and long-run behavior of a perturbed fractional process are no longer driven by the same innovation. As defined in [Frederiksen et al. \(2012\)](#) a perturbed fractional process can be expressed by a signal-plus-noise model with the signal process being a long-memory process, which is perturbed by an additive noise term. We focus on local Whittle based estimators for perturbed fractional processes and refer to [Sun and Phillips \(2003\)](#) or [Arteche \(2006\)](#) for contributions based on the log-periodogram estimator.

Extending this survey paper by the estimators of [Andrews and Sun \(2004\)](#), [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) we are considering an additive noise component as

well as short-run effects as another form of contamination. All three estimation methods are modifying the form of the spectral density. [Andrews and Sun \(2004\)](#) replace a constant term in the spectral density by a polynomial structure to model the short-run dynamics. [Hurvich et al. \(2005\)](#) extend the estimator of [Hurvich and Ray \(2003\)](#) that is adding an additional term for capturing the effect of the noise term to the low frequency behavior of the spectral density. The estimator of [Frederiksen et al. \(2012\)](#) is modeling the short-run dynamics as well as the influence of an additive noise component by a polynomial and allows for serial dependence in the noise term, in contrast to [Frederiksen and Nielsen \(2008\)](#).

According to our Monte Carlo results we conclude to either use the estimator of [Iacone \(2010\)](#) or [Hou and Perron \(2014\)](#) in cases of low frequency contaminations. Although the estimator of [McCloskey and Perron \(2013\)](#) yield comparable estimation results, it suffers from a higher variance. The performance of the estimator of [Smith \(2005\)](#) in cases of high short-run dynamics or perturbation is comparable to the standard perturbation methods, although the estimator has originally been developed for low frequency contamination. However, in the latter situation the estimator is no alternative to its competitors. Furthermore, the estimator of [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) yield almost identical findings which are in most situations better than the results of [Andrews and Sun \(2004\)](#). Based on the Monte Carlo results we recommend to apply the low frequency estimators when its unclear whether a low frequency contamination or a perturbed fractional process is present.

Three out of the seven modified semiparametric estimators that we consider have been applied to empirical data in the original paper, such as the Dow Jones Industrial Average or the S&P 500 series. [Smith \(2005\)](#) and [Frederiksen et al. \(2012\)](#) find upward biased estimator suggesting a long-memory process, whereas [McCloskey and Perron \(2013\)](#) find evidence for a spurious long-memory process. In an empirical application we apply the methods robust to perturbation as well as to low frequency contaminations to daily log-absolute returns of the S&P 500 which gives us additional insights which of these effects if not both are of relevance in our data set. We conclude that the analyzed time series follows rather a spurious long-memory process than a perturbed fractional process. This finding is further supported by a test of [Qu \(2011\)](#) that rejects the null hypothesis of a true long-memory process at the 1% significance level.

The structure of the paper is as follows. In the next section, we introduce a variety of modified semiparametric estimation methods of the memory parameter. In [Section 3](#) we analyze the small sample performance of the different estimation approaches in a Monte Carlo study. [Section 4](#) presents the empirical application and [Section 5](#) concludes. Supplementary Materials with detailed Monte Carlo results are provided on the authors webpages.

2 Semiparametric estimation methods

In this section we introduce several concepts of standard and modified estimation methods. We start with general long-memory definitions and briefly review the two standard estimation methods. An overview of modified local Whittle and log-periodogram estimation methods follows which have been designed to capture low frequency contaminations and to reduce the bias of the standard methods. Afterwards, we consider approaches which focus on perturbed fractional processes and therefore account for short-run and additive noise effects.

The model and standard estimation methods

A pure long-memory process is typically modeled as an *ARFIMA* (p, d, q) process which has been developed by [Granger and Joyeux \(1980\)](#) and [Hosking \(1981\)](#). It is defined as

$$\Phi(L)(1-L)^d y_t = \Theta(L)\epsilon_t,$$

with $\epsilon_t \sim iid(0, \sigma_\epsilon^2)$, $\Phi(L)$ and $\Theta(L)$ being the autoregressive and moving average polynomials respectively with all roots lying outside the unit circle. The order of fractional integration is given by d , L denotes the backshift operator and $(1-L)^d = \sum_{j=0}^{\infty} \frac{\Gamma(j-d)L^j}{\Gamma(-d)\Gamma(j+1)}$ with the Gamma function $\Gamma(z)$. The interval $0 < d < 1/2$ implies long memory and short memory exists for $d = 0$ with an exponentially decaying autocorrelation function and a bounded spectral density function for zero frequencies. The process is stationary and invertible for the interval $-1/2 < d < 1/2$ as well as mean reverting for $d < 1$. Typically, a long-memory process is defined by not summable autocovariances, $\sum_{k=-\infty}^{\infty} |\gamma(k)| = \infty$. Further, the spectral density function of a stationary *ARFIMA* process is given by $f(\lambda) = G\lambda^{-2d}$ for frequency λ close to the origin and a slowly varying function G (cf. [Doukhan et al. \(2002\)](#)).

In the following, we introduce the data generating process with a constant term c and y_t being a short or long-memory process,

$$x_t = c + y_t + Au_t + Bw_t. \quad (2.1)$$

The low frequency contamination and additive noise component are captured by u_t and w_t , where A is a dummy variable which is 1 if we include low frequency contaminations in the DGP and zero otherwise. The dummy variable B is its respective equivalent for a possible perturbation process. We consider several types of low frequency contamination, among them are a sinus time trend and randomly (non-)stationary as well as deterministic level shifts. The perturbation process is captured by different forms of

ARMA processes with varying coefficients and variances of the error term. The explicit structure of u_t and w_t will be discussed in Section 3 in more detail. The two standard estimation methods are designed for a process of the form $x_t = y_t$. The four estimators especially designed for low frequency components consider the data generating process $x_t = y_t + u_t$, except for [Smith \(2005\)](#) who excludes the short-memory process in y_t . Additionally, [Hou and Perron \(2014\)](#) extend the process to $x_t = y_t + u_t + w_t$ with w_t being a zero mean white noise process with variance σ_w^2 . The three estimators developed for perturbed fractional processes are exhibiting the following DGP structure $x_t = y_t + w_t$ with w_t being an *ARMA* process. Finally, a joint definition of the periodogram for the individual processes in equation (2.1) with $I_v(\lambda) = (2\pi T)^{-1} |\sum_{t=1}^T v_t \exp(-it\lambda)|^2$ with $v = x, y, u$ and T being the sample size is provided by [Hou and Perron \(2014\)](#).

Before we compare the modified estimation methods, we briefly summarize the properties of two most commonly applied semiparametric estimation procedures of [Geweke and Porter-Hudak \(1983\)](#) and [Kuensch \(1987\)](#). They serve as benchmark approaches since the modified versions should generally produce a smaller bias in the presence of contaminations. Further, the efficiency loss of the modified versions in situations without contaminations can be illustrated by comparing their performance to the standard methods. [Geweke and Porter-Hudak \(1983\)](#) propose the log-periodogram estimator as one of the earliest estimator for a semiparametric model. The GPH estimator is based on a regression model which is obtained by replacing the spectral density of a process by the logarithm of its periodogram,

$$\log I_y(\lambda_j) = c + dX_j + e_j, \quad \lambda_j = 2\pi j/T, \quad j = 1, \dots, m, \quad (2.2)$$

with a constant term c and an error term e_j . The explanatory variable is given by $X_j = -\log(2 - 2\cos(\lambda_j))$ with the bandwidth parameter m and the Fourier frequency λ_j . Minimizing the sum of squared residuals of the above regression model with respect to the slope coefficient yield

$$\hat{d}_{GPH} = -\frac{1}{2} \frac{\sum_{j=1}^m (Y_j - \bar{Y}) \log I_y(\lambda_j)}{\sum_{j=1}^m (Y_j - \bar{Y})^2},$$

with $Y_j = \log|1 - \exp(-i\lambda_j)| = \log|2\sin(\lambda_j/2)|$ and $\bar{Y} = 1/m \sum_{j=1}^m Y_j$. [Robinson \(1995\)](#) shows that the asymptotic distribution equals $\sqrt{m}(\hat{d}_{GPH} - d) \xrightarrow{d} \mathcal{N}(0, \frac{\pi^2}{24})$ for $d \in (-1/2, 1/2)$. For the following asymptotic properties of the different estimation methods we assume the stationary interval of the memory parameter, if not stated differently. The local Whittle method of [Kuensch \(1987\)](#), also known as the Gaussian semiparametric estimation

method, is often applied in the literature. The estimator is based on the local Whittle likelihood function

$$Q(G, d) = \frac{1}{m} \sum_{j=1}^m \left\{ \log(G\lambda_j^{-2d}) + \frac{I_y(\lambda_j)}{G\lambda_j^{-2d}} \right\},$$

with $j = 1, \dots, \lfloor T/2 \rfloor$. Minimizing $Q(G, d)$ w.r.t. G leads to the profiled likelihood function

$$R(d) = \log \left(\frac{1}{m} \sum_{j=1}^m \lambda_j^{2d} I_y(\lambda_j) \right) - \frac{2d}{m} \sum_{j=1}^m \log \lambda_j. \quad (2.3)$$

The local Whittle estimator is given by $\hat{d}_{LW} = \arg \min_d R(d)$ and converges to a normal distribution according to $\sqrt{m}(\hat{d}_{LW} - d) \xrightarrow{d} \mathcal{N}\left(0, \frac{1}{4}\right)$.

Modified Log-periodogram Estimator of Smith (2005)

The form of the spectral density is influenced by low frequency contaminations, however, standard estimation methods are not considering this change and biased estimators emerge. Smith (2005) introduces a modified log-periodogram estimator. For rare level shifts, the part of the adjusted spectral density that is mainly responsible for the high bias of the standard GPH method equals $-\log(p^2 + \lambda^2)$. Since the level shift probability p is unknown an estimate $p_T = km/T$ is introduced with $k > 0$. The estimation approach considers the new form of the spectral density with p_T by including the above component of the adjusted spectral density as a regressor in equation (2.2). The regression model of the log-periodogram estimator is extended by the additional regressor to

$$\log I_x(\lambda_j) = c + dX_j + \tau Z_j + e_j,$$

with X_j as defined above and $Z_j = -\log\left((km/T)^2 + \lambda_j^2\right)$. The modified log-periodogram estimator is given by

$$\hat{d}_{SMI} = (\tilde{X}' M \tilde{X})^{-1} \tilde{X}' M \log I_x(\lambda_j),$$

with $\tilde{X} = X - \bar{X}$, the annihilator matrix $M = I - P = I - \tilde{Z}(\tilde{Z}'\tilde{Z})^{-1}\tilde{Z}'$ with P denoting the projection matrix and $\tilde{Z} = Z - \bar{Z}$. Simulation studies of Smith (2005) recommends to set $k = 3$. The limiting distribution is similar to the log-periodogram distribution with $\sqrt{m}(\hat{d}_{SMI} - d) \xrightarrow{d} \mathcal{N}\left(0, \frac{\pi^2}{24z_k}\right)$. However, the bias reduction implicates a variance increase which is captured by the scale factor z_k , with $z_3 = 0.31$ for $k=3$.

Modified Local Whittle Estimator of [Iacone \(2010\)](#)

In contrast to modifying the form of the spectral density, [Iacone \(2010\)](#) proposes a trimmed version of the Gaussian semiparametric estimator of [Kuensch \(1987\)](#). The idea of the procedure is to balance the frequencies of the periodogram. On the one hand enough frequencies should be considered so that the stationary *ARFIMA* process dominates in this region and on the other hand lower frequencies for which the contamination component is most influential should be excluded. Therefore, a trimming parameter l is introduced to the local Whittle likelihood function and the loss function in equation (2.3) can be rewritten as,

$$R(d) = \log \left\{ \frac{1}{m-l+1} \sum_{j=l}^m \lambda_j^{2d} I_x(\lambda_j) \right\} - \frac{2d}{m-l+1} \sum_{j=l}^m \log \lambda_j.$$

The modified local Whittle estimator is given by $\hat{d}_{IAC} = \arg \min_d R(d)$ and by setting $l=1$ the local Whittle estimator is obtained. In general, the trimming and bandwidth parameter need to be set to $l = \max\{1, \lfloor K_l T^\alpha \rfloor\}$ and $m = \max\{l+1, \lfloor K_m T^\beta \rfloor\}$ with $0 \leq \alpha < \beta < 1$ for some $K_l, K_m \in (0, \infty)$ and $1 \leq l < m \leq \lfloor T/2 \rfloor$. Under certain assumptions of the trimming and bandwidth parameter the estimator of [Iacone \(2010\)](#) follows the limiting distribution of the local Whittle estimator without an inflated variance caused by the trimming technique, $\sqrt{m}(\hat{d}_{IAC} - d) \xrightarrow{d} \mathcal{N}\left(0, \frac{1}{4}\right)$.

Modified Log-periodogram Estimator of [McCloskey and Perron \(2013\)](#)

In addition to [Smith \(2005\)](#) who introduces a biased correction form of the GPH estimator, [McCloskey and Perron \(2013\)](#) provide a trimmed version of the popular log-periodogram estimator of [Geweke and Porter-Hudak \(1983\)](#). One major difference between these two estimation methods is the restriction on the process. The modified GPH estimator of [Smith \(2005\)](#) is designed for a short-memory process, whereas [McCloskey and Perron \(2013\)](#) extend their estimator to short or long-memory processes. The standard log-periodogram regression from equation (2.2) is adjusted by the trimming parameter l and giving by

$$\log I_x(\lambda_j) = c + dX_j + e_j,$$

with $j = l, \dots, m$. Applying the ordinary least squares method, the modified GPH estimator can be expressed as

$$\hat{d}_{MCP} = -\frac{1}{2} \frac{\sum_{j=l}^m (Y_j - \bar{Y}) \log I_x(\lambda_j)}{\sum_{j=l}^m (Y_j - \bar{Y})^2}, \quad (2.4)$$

with $Y_j = \log|1 - \exp(-i\lambda_j)|$ and $\bar{Y} = (m - l + 1)^{-1} \sum_{j=l}^m Y_j$. Additionally to the general requirements on the trimming and bandwidth parameter mentioned above for the previous estimator, [McCloskey and Perron \(2013\)](#) constrained the trimming parameter to a strictly positive α value. Further, an additional condition on the two user-chosen parameters is expressed by $(m \log m)/T + (l \log^2 m)/m + (T^{1-2d} \log^4 m)/(l^{2-2d}) \rightarrow 0$ as $T \rightarrow \infty$. To satisfy this condition α is restricted to certain values depending on the memory parameter. For the interval of particular interest, $0 \leq d < 1/2$, the exponent of the trimming parameter needs to be set to $\alpha = 1/2 + \varepsilon$ with $\varepsilon > 0$. The optimal choice of the upper and lower bound of the sum in Equation (2.4) is crucial for this estimation method.

Under restrictive assumptions concerning the trimming and bandwidth parameter the limiting distribution of the trimmed GPH estimator shows no efficiency loss in cases of low frequency contaminations so that $\sqrt{m}(\hat{d}_{MCP} - d) \xrightarrow{d} N(0, \frac{\pi^2}{24})$ is still valid. However, in the absence of a contamination component the variance increases and compared to the trimmed estimator of [Iacone \(2010\)](#) the variance increase is sometimes extremely high.

Modified Local Whittle Estimator of [Hou and Perron \(2014\)](#)

This approach considers the new form of the approximated spectral density when low frequency contaminations are present. In contrast to [Iacone \(2010\)](#) and [McCloskey and Perron \(2013\)](#), this method considers all data and no trimming technique is required. Adding the new term $G_u \lambda^{-2}/T$ to the standard form of the spectral density, a so-called pseudo spectral density can be written as

$$f_x(\lambda) = G\lambda^{-2d} + G_u \lambda^{-2}/T = G(\lambda^{-2d} + (G_u/G)\lambda^{-2}/T) = G(\lambda^{-2d} + \theta_u \lambda^{-2}/T),$$

with θ_u being the signal-to-noise ratio. The new parameter θ_u controls the influence of contaminations at low frequencies. The pseudo spectral density aims to provide a good approximation of the true spectral density in the existence of low frequency

contaminations. The pseudo likelihood function is given by

$$Q(G, d, \theta_u) = \frac{1}{m} \sum_{j=1}^m \left\{ \log f_x(\lambda_j) + \frac{I_x(\lambda_j)}{f_x(\lambda_j)} \right\} \quad (2.5)$$

and the modified local Whittle estimator is defined as $\hat{d}_{HP} = \arg \min_{d, \theta_u} R(d, \theta_u)$ for $d \in (-1/2, 1)$ and $\theta_u \in (0, \infty)$ with

$$R(d, \theta_u) = \log \left(\frac{1}{m} \sum_{j=1}^m \frac{I_x(\lambda_j)}{\lambda_j^{-2d} + \theta_u \lambda_j^{-2}/T} \right) + \frac{1}{m} \sum_{j=1}^m \log(\lambda_j^{-2d} + \theta_u \lambda_j^{-2}/T).$$

In the absence of low frequency contamination the form of the pseudo likelihood function in equation (2.5) reduces to the standard local Whittle likelihood function. Hence, no asymptotic efficiency loss exists with $\sqrt{m}(\hat{d}_{HP} - d) \xrightarrow{d} \mathcal{N}(0, \frac{1}{4})$ for $d \in [0, 1/2)$. In contrast to the aforementioned authors, [Hou and Perron \(2014\)](#) are the first who provide an extension to account for additive noise and short-memory effects. The modifications are based on the concepts of [Andrews and Sun \(2004\)](#), [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) which follow in the next subsections.

Local Polynomial Whittle Estimator of [Andrews and Sun \(2004\)](#)

Additionally to the modified estimation methods of the memory parameter we consider three estimation methods for perturbed fractional processes. [Arteche \(2004\)](#) shows that when the local Whittle and log-periodogram estimator are applied to perturbed fractional processes they are biased but remain consistent and asymptotical normal. Therefore, several estimation methods have been developed to account for the perturbation. The following three estimation methods are modifying the local Whittle estimator of [Kuensch \(1987\)](#).

In contrast to a pure fractional process, the short-run dynamics and long-run behavior of a perturbed fractional process are no longer driven by the same innovation. As defined in [Frederiksen et al. \(2012\)](#) a perturbed fractional process can be expressed by a signal-plus-noise model with the signal process being a long-memory process, which is perturbed by an additive noise term. Following the authors, we use an ARMA process for the perturbation process.

The estimation method of [Andrews and Sun \(2004\)](#) adjusts the form of the spectral density by providing a polynomial structure. For frequencies close to the origin the term $\log G$ can be approximated by $\log G - \gamma(\theta_s, \lambda)$ with the polynomial $\gamma(\theta_s, \lambda) = \sum_{k=1}^r \theta_k \lambda^{2k}$. This leads to the following form of the spectral density $f(\lambda) = G \lambda^{-2d} = G \lambda^{-2d} \exp(-\gamma(\theta_s, \lambda))$ and the resulting estimator is known as local polynomial Whittle

(LPW). The log-likelihood function of the estimator is given by

$$Q(G, d, \theta_s) = \frac{1}{m} \sum_{j=1}^m \left\{ \log \left[G \lambda_j^{-2d} \exp(-\gamma(\theta_s, \lambda_j)) \right] + \frac{I_x(\lambda_j)}{G \lambda_j^{-2d} \exp(-\gamma(\theta_s, \lambda_j))} \right\}, \quad (2.6)$$

where $\gamma(\theta_s, \lambda_j) = \sum_{k=1}^r \theta_k \lambda_j^{2k}$ and $\theta_s = (\theta_1, \dots, \theta_r)'$. The local polynomial Whittle estimator is defined as $\hat{d}_{LPW} = \arg \min_{d, \theta_s} R(d, \theta_s)$ and θ_s will be in a set of \mathbb{R} with

$$R(d, \theta_s) = \log \left(\frac{1}{m} \sum_{j=1}^m \lambda_j^{2d} I_x(\lambda_j) \exp(\gamma(\theta_s, \lambda_j)) \right) - \frac{2d}{m} \sum_{j=1}^m \log \lambda_j - \frac{1}{m} \sum_{j=1}^m \gamma(\theta_s, \lambda_j) + 1,$$

and by setting $\theta_s = 0$ in equation (2.6) the standard local Whittle estimator is obtained. The polynomial degree r influences on the one hand the variance and on the other hand the convergence rate of the estimator. We are more interested in a reduced variance than in a convergence rate close to a parametric one. Therefore, we choose a small polynomial degree and set $r = 1$.

The variance of the LPW estimator increases by a constant c_r that depends on the polynomial degree r since a polynomial structure of the spectral density is considered. The asymptotic properties can be summarized by $\sqrt{m}(\hat{d}_{LPW} - d) \xrightarrow{d} \mathcal{N}(0, \frac{c_r}{4})$ where the constant term in the variance is increasing with r and equals $c_1 = 9/4$ for $r = 1$.

Local Whittle with Noise Estimator of Hurvich et al. (2005)

Hurvich et al. (2005) suggest to replace the constant component G in the spectral density by a more complex function $G(1 + h(d, \theta_\rho, \lambda))$. We focus on the following parameterizations of $h(d, \theta_\rho, \lambda) = \theta_\rho \lambda^{2d}$. The local Whittle with noise (LWN) estimator of Hurvich et al. (2005) is nested in the estimator of Frederiksen et al. (2012) and the additional parameter θ_ρ is labeled according to them. The above parameterization of $h(d, \theta_\rho, \lambda)$ excludes serial correlation between the noise term and the long-memory process, unlike the method of Frederiksen et al. (2012). With the improved form of the spectral density and the additional parameter θ_ρ , the log-likelihood function equals

$$Q(G, d, \theta_\rho) = \sum_{j=1}^m \left\{ \log \left[G \lambda_j^{-2d} (1 + h(d, \theta_\rho, \lambda_j)) \right] + \frac{I_x(\lambda_j)}{G \lambda_j^{-2d} (1 + h(d, \theta_\rho, \lambda_j))} \right\}.$$

Minimizing $Q(G, d, \theta_\rho)$ w.r.t. G leads to the profiled likelihood function

$$R(d, \theta_\rho) = \log \left(\frac{1}{m} \sum_{j=1}^m \frac{I_x(\lambda_j) \lambda_j^{2d}}{1 + h(d, \theta_\rho, \lambda_j)} \right) - \frac{2d}{m} \sum_{j=1}^m \log(\lambda_j (1 + h(d, \theta_\rho, \lambda_j))).$$

The LWN estimator is defined as $\hat{d}_{LWN} = \arg \min_{d, \theta_\rho} R(d, \theta_\rho)$ for $d \in (0, 1)$ and $\theta_\rho \in (0, \infty)$. The standard local Whittle estimator is obtained in the case of $h(d, \theta_\rho, \lambda) = 0$. An important difference to the previously introduced estimation methods is the domain of the memory parameter since the short-memory case is explicitly not allowed, instead d is supposed to be greater than zero. Allowing for no correlation between the signal and noise process, the variance of the LWN estimator is depending on d with $d \in (0, 3/4)$, so that the limiting distribution is expressed by $\sqrt{m}(\hat{d}_{LWN} - d) \xrightarrow{d} \mathcal{N}\left(0, \frac{(1+d)^2}{16d^2}\right)$.

Local Polynomial Whittle with Noise Estimator of Frederiksen et al. (2012)

Frederiksen et al. (2012) combine the approaches of Andrews and Sun (2004) and Hurvich et al. (2005) to create a new estimation method, the so-called local polynomial Whittle with noise (LPWN) estimator. In contrast to Hurvich et al. (2005), the spectral density of the LPWN estimator is locally approximated by polynomials instead of a constant near the zero frequency. Furthermore, this procedure differs from the aforementioned methods since it takes the correlation between the signal and the noise process into consideration. Therefore, two polynomials are introduced which capture the noise, r_w , and short-memory effects r_y . Frederiksen et al. (2012) propose the following approximation of the spectral density $f_x(\lambda_j) \sim G\lambda^{-2d}h(d, \theta, \lambda)$. The LPWN estimator assumes an additional functional form of the spectral density that is expressed by

$$h(d, \theta, \lambda) = \exp(h_y(\theta_y, \lambda)) + \theta_\rho \lambda^{2d} \exp(h_w(\theta_w, \lambda)) \quad (2.7)$$

with $\theta = (\theta'_y, \theta_\rho, \theta'_w)'$ and by setting $h(d, \theta, \lambda) = 1$ the spectral density of the local Whittle estimator is obtained. The exponents in equation (2.7) exhibit the polynomial structure of the earlier introduced estimator of Andrews and Sun (2004) with $h_a(\theta_a, \lambda) = \sum_{k=1}^{r_a} \theta_{a,k} 2^k$ where $a = y, w$ and $h_a(\theta_a, \lambda) = 0$ for $r_a = 0$. Additionally, by setting both polynomials r_y and r_w to zero the LWN estimator of Hurvich et al. (2005) is obtained with $h(d, \theta, \lambda) = 1 + \theta_\rho \lambda^{2d}$. Further, the authors distinguish between three different types of LPWN(r_y, r_w) estimators, the LPWN(0,1), LPWN(1,0) and LPWN(1,1). The LPWN estimator is obtained by $\hat{d}_{LPWN} = \arg \min_{d, \theta} R(d, \theta)$ for $d \in (0, 1)$ and $\theta \in (\mathbb{R}^y \times (0, \infty) \times \mathbb{R}^w)$ with the objective function

$$R(d, \theta) = \log \left(\frac{1}{m} \sum_{j=1}^m \frac{\lambda_j^{2d} I_x(\lambda_j)}{h(d, \theta, \lambda_j)} \right) - \frac{2d}{m} \sum_{j=1}^m \log \lambda_j + \frac{1}{m} \sum_{j=1}^m \log h(d, \theta, \lambda_j).$$

The polynomials increase the asymptotic variance of $\sqrt{m}(\hat{d}_{LPWN} - d)$ by a multiplicative constant depending only on d and not on the parameters θ , with $d \in (0, 3/4)$. The LPWN estimator is normally distributed with a zero mean and exhibits a more complex

form of the variance compared to the aforementioned methods, which can be found in [Frederiksen et al. \(2012\)](#).

3 Monte Carlo Analysis

This section analyze the performance of the previously presented estimators under different scenarios. First, we introduce the Monte Carlo setup with different kind of DGPs and parameter settings for the estimation methods. Afterwards, we present the simulation results by focusing on the bias and root mean squared error (RMSE) of the estimators.

Monte Carlo setup

We compare the performance of the estimation methods under nine different DGPs, which are given in Table 3.1. The DGP types are obtained by adapting parts of the Monte Carlo structure provided by [Qu \(2011\)](#), [Frederiksen et al. \(2012\)](#) and [Hou and Perron \(2014\)](#). The process y_t is modeled by an ARFIMA (1,d,0) with $(1 - \alpha_y L)(1 - L)^d y_t = \varepsilon_t$, where ε_t is a zero mean white noise process if not otherwise defined. We standardize the ARFIMA process by its own standard deviation and consider the following values of the autoregressive and persistence coefficient with $d = 0.0, 0.2, 0.4, 0.6$ and $\alpha_y = 0.0, 0.3, 0.6$. By choosing $d = 0.6$ we violate against the stationarity assumption for a variety of estimators to check the robustness in the case of non-stationarity. The sample size is set to $T = 256, 512, 1024, 4096$ and the results are based on 1000 Monte Carlo replications.

In the following, we provide further information on the different types of DGPs given in Table 3.1. Unreported simulation results of a linear trend as contamination show almost no difference to the performance of a sinus trend and are therefore omitted. The components π_t and η_t of the random level shift (RLS) processes are mutually independent and the shift probability equals $p = 10/T$. For the deterministic level shift process we consider five shifts at fixed user-chosen dates with $c_i = -2, 2, -4, 2, 1, -2$ for $i = 1, \dots, 6$ and $T_i/T \rightarrow \tau_i$ with $0 < \tau_1 < \dots < \tau_5 < 1$. The DGP 7 and 8 are especially designed for the perturbed fractional estimation methods. The ARMA(0,0) process is basically an additive white noise process with a large variance. Unreported simulation results of an ARMA(1,0) process with $\alpha_w = 0.6$ are showing no clear pattern and recommendations are hard to formulate. Therefore, we omit the results and instead consider the ARMA(0,1) process. The last DGP combines the two groups of contaminations with a low frequency component, in the form of a stationary RLS, and an additive noise term as a perturbation contamination.

Following [Frederiksen et al. \(2012\)](#), we set the noise-to-signal ratio equal to five and

no contamination	$x_t = y_t$				
sinus trend	$x_t = y_t + u_t$	$u_t = 3 \sin(4\pi t/T)$			
stationary RLS	$x_t = y_t + u_t$	$u_t = (1 - \pi\phi)u_{t-1} + \delta_t$	$\delta_t = \pi_t \eta_t$	$\eta_t \stackrel{iid}{\sim} N(0, 1)$	$\pi_t \stackrel{iid}{\sim} \text{Bernoulli}(10/T, 1)$ $\phi = 1$
non-stationary RLS	$x_t = y_t + u_t$	$u_t = (1 - \pi\phi)u_{t-1} + \delta_t$	$\delta_t = \pi_t \eta_t$	$\eta_t \stackrel{iid}{\sim} N(0, 1)$	$\pi_t \stackrel{iid}{\sim} \text{Bernoulli}(10/T, 1)$ $\phi = 0$
deterministic level shift	$x_t = y_t + u_t$	$u_t = \sum_{i=1}^B c_i \mathbb{1}(T_{i-1} < t \leq T_i)$	$0 < c_i < \infty$	$0 = T_0 < T_1 < \dots < T_{B-1} < T_B = T$	
GARCH (1,1)	$x_t = y_t + u_t$	$u_t = \sigma_t v_t$	$v_t \stackrel{iid}{\sim} N(0, 1)$	$\sigma_t^2 = 0.1u_{t-1}^2 + 0.8\sigma_{t-1}^2$	
ARMA(0,0)	$x_t = y_t + w_t$	$w_t = \zeta_t$	$\zeta_t \stackrel{iid}{\sim} N(0, 4)$		
ARMA(0,1)	$x_t = y_t + w_t$	$w_t = (1 + \beta_w L)\zeta_t$	$\beta_w = 0.6$	$\zeta_t \stackrel{iid}{\sim} N(0, 1)$	$\varepsilon_t \stackrel{iid}{\sim} N(0, \sigma_{\varepsilon_t}^2)$
stationary RLS plus noise	$x_t = y_t + u_t + w_t$	$u_t = (1 - \pi\phi)u_{t-1} + \delta_t$	$\delta_t = \pi_t \eta_t$	$\eta_t \stackrel{iid}{\sim} N(0, 1)$	$\pi_t \stackrel{iid}{\sim} \text{Bernoulli}(10/T, 1)$ $\phi = 1$
			$w_t = \zeta_t$	$\zeta_t \stackrel{iid}{\sim} N(0, 4)$	

Table 3.1: Overview of data generating processes

by rearranging the noise-to-signal ratio the variance of the ARFIMA (1,d,0) process is obtained by

$$\sigma_{\varepsilon}^2 = \frac{(1 - \alpha_y)^2 \cdot \frac{(1 + \beta_w)^2}{(1 - \alpha_w)^2}}{5}.$$

We conduct the simulation study for all three forms of the LPWN estimator of [Frederiksen et al. \(2012\)](#). The bias and RMSE results of the three different types are very similar, especially the LPWN(0,1) and LPWN(1,0) show no significant difference. For the Monte Carlo study and the empirical example we present the results of the LPWN(1,1) since we are varying the autoregressive coefficient for every DGP and also analyze several noise structures as perturbation. In general, we follow the commonly used parameter settings in the literature to reflect the empirical findings in the financial volatility. For all estimation methods we choose the following values of the bandwidth $m = \lfloor T^\delta \rfloor$ with $\delta = 0.60, 0.70, 0.79$. The additional parameter of [Smith \(2005\)](#) is set to $k = 3$. To satisfy the trimming and bandwidth condition of [Iacone \(2010\)](#), we choose $m = \lfloor 0.9T^\delta \rfloor$ and $l = \lfloor 0.2T^{\delta-0.05} \rfloor$. We consider the adaptive procedure of [McCloskey and Perron \(2013\)](#) since this extension exhibits a smaller variance. The first step of the adaptive method, $i = 1$, applies the setting of the trimmed GPH estimator with $l = \lfloor K_l T^{1/2+\varepsilon} \rfloor$. For the

next iterations, $i > 1$, the trimming changes to $l = \lfloor K_l T^{(1-2\hat{d}_{i-1})/(2-2\hat{d}_{i-1})+\varepsilon} \rfloor$ with \hat{d} as a consistent estimator of d . Two different convergence criteria are used, either the procedure stops as $|\hat{d}_i - \hat{d}_{i-1}| < 0.01$ or when $i > 9$ with the final value of \hat{d} . We set $K_l = 1$ and $\varepsilon = 0.03$ for the estimator of [McCloskey and Perron \(2013\)](#) and the GPH estimator is used as starting value. The numerical optimization of the Monte Carlo study is based on R using the L-BFGS-B algorithm developed by [Byrd et al. \(1995\)](#).

Monte Carlo results

In the following, the DGPs are numbered consecutively according to the order in [Table 3.1](#). The bias and root mean squared error results of all estimation methods and for the corresponding DGPs are given in the Supplementary Materials. Before presenting some detailed results, we are summarizing the major findings of the simulation study.

The two standard estimation methods are very robust compared to the modified methods in two cases. Considering the first DGP without contamination and the ARFIMA (1,d,0) plus GARCH (1,1), the log-periodogram and Gaussian estimator are both characterized by a smaller bias and RMSE especially for $\phi \leq 0.3$. In the case of a larger bandwidth and $\phi = 0.6$ the modified estimators of [Andrews and Sun \(2004\)](#) and [Hou and Perron \(2014\)](#) perform slightly better or equivalent in terms of the RMSE than the local Whittle estimator. The same results hold for the modified estimator of [Smith \(2005\)](#) compared to the GPH estimator.

For a sinus trend or deterministic level shift as contamination type the modified estimator of [Hou and Perron \(2014\)](#) is outperforming the local Whittle estimator in terms of bias and also for the majority cases of RMSE. Additionally, for the two variations of the random level shift process \hat{d}_{HP} performs well, especially for lower values of the memory parameter ($d \leq 0.2$).

The two trimmed versions of the local Whittle and GPH estimator are both exhibiting a very similar pattern over the DGPs. Similar to the estimator of [Hou and Perron \(2014\)](#), the estimators of [Iacone \(2010\)](#) and [McCloskey and Perron \(2013\)](#) are also having their strength in the presence of level shifts irrespectively if they occur randomly (non-) stationary or deterministic. The good performance in the aforementioned situations is restricted to smaller values of d and to less short-run effects.

While the estimators of [Hou and Perron \(2014\)](#), [Iacone \(2010\)](#) and [McCloskey and Perron \(2013\)](#) improve the standard estimators often in the short-memory case or without short-run dynamics, the methods of [Smith \(2005\)](#), [Andrews and Sun \(2004\)](#), [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) outperform the respectively standard methods for larger values of the persistence parameter ($d \geq 0.4$) as well as for a higher short-run parameter ($\phi \geq 0.3$). This finding is not very surprisingly for the three estimation

methods designed for perturbation, however the good performance of \hat{d}_{SMI} in these situations is rather unexpected. In particular, the DGPs especially constructed for the perturbation setup are dominated by the perturbation estimators and by [Smith \(2005\)](#). Moreover, unreported simulation studies stress the robustness of the estimation method of [Smith \(2005\)](#) to short-run effects with values larger than $\phi = 0.6$.

After a broad overview of the simulation results we focus on three different contamination types in more detail, that is a sinus trend, a stationary random level shift and an additive noise term. Since the parameter intervals of the Monte Carlo study are very comprehensively, we concentrate on a sample size of $T = 1024$ for the following three tables and distinguish between two bandwidths. Further, we omit the persistence value of $d = 0.6$ for the first two detailed DGPs and for the third contamination type we add the memory value $d = 0.6$ but exclude the short-memory case.

d	$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$					
	0.0		0.2		0.4		0.0		0.2		0.4		0.0		0.2		0.4	
δ	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79
	Bias																	
d_{LW}	0.661	0.524	0.457	0.350	0.297	0.215	0.614	0.527	0.432	0.375	0.300	0.268	0.614	0.596	0.470	0.485	0.374	0.420
d_{GPH}	0.119	0.075	0.095	0.063	0.080	0.047	0.153	0.171	0.131	0.158	0.114	0.148	0.267	0.369	0.246	0.355	0.234	0.349
d_{HP}	-0.311	-0.147	-0.288	-0.145	-0.275	-0.160	-0.158	0.059	-0.154	0.048	-0.159	0.037	0.121	0.371	0.119	0.374	0.161	0.413
d_{IAC}	0.002	0.002	-0.007	-0.008	-0.007	-0.017	0.070	0.185	0.057	0.173	0.063	0.167	0.293	0.519	0.288	0.513	0.293	0.503
d_{MCP}	-0.082	-0.015	-0.041	-0.007	0.020	0.006	0.060	0.159	0.045	0.131	0.096	0.148	0.252	0.371	0.250	0.362	0.335	0.503
d_{SMI}	0.287	0.179	0.234	0.146	0.187	0.113	0.257	0.155	0.215	0.125	0.171	0.101	0.227	0.190	0.185	0.163	0.151	0.143
d_{LPW}	0.928	0.719	0.665	0.501	0.448	0.329	0.830	0.650	0.593	0.457	0.413	0.314	0.735	0.625	0.539	0.469	0.401	0.364
d_{LWN}			0.790	0.789	0.582	0.507			0.789	0.674	0.546	0.372			0.673	0.499	0.437	0.423
d_{LPWN11}			0.790	0.789	0.581	0.507			0.789	0.674	0.545	0.372			0.673	0.499	0.436	0.423
	RMSE																	
d_{LW}	0.661	0.524	0.457	0.350	0.299	0.216	0.615	0.527	0.432	0.375	0.302	0.270	0.615	0.596	0.470	0.486	0.376	0.421
d_{GPH}	0.134	0.086	0.113	0.076	0.098	0.065	0.163	0.176	0.143	0.164	0.128	0.155	0.273	0.371	0.253	0.357	0.241	0.352
d_{HP}	0.332	0.161	0.311	0.158	0.302	0.173	0.191	0.080	0.185	0.075	0.195	0.072	0.150	0.375	0.151	0.378	0.224	0.415
d_{IAC}	0.104	0.079	0.108	0.076	0.109	0.079	0.128	0.199	0.116	0.190	0.118	0.184	0.312	0.525	0.308	0.518	0.310	0.507
d_{MCP}	2.981	0.105	0.178	0.079	0.127	0.066	0.230	0.171	0.134	0.142	0.148	0.155	0.269	0.373	0.288	0.368	0.397	0.535
d_{SMI}	0.310	0.195	0.257	0.164	0.219	0.139	0.280	0.172	0.240	0.147	0.203	0.130	0.252	0.203	0.215	0.180	0.188	0.164
d_{LPW}	0.929	0.720	0.666	0.501	0.450	0.330	0.831	0.650	0.594	0.458	0.416	0.316	0.736	0.625	0.541	0.470	0.404	0.366
d_{LWN}			0.790	0.789	0.582	0.511			0.789	0.679	0.549	0.376			0.678	0.499	0.441	0.424
d_{LPWN11}			0.790	0.789	0.582	0.510			0.789	0.679	0.548	0.376			0.678	0.499	0.441	0.424

Table 3.2: DGP2:ARFIMA (1,d,0) plus sinus trend for T=1024

The results of a sinus trend as contamination are presented in [Table 3.2](#). The best performance in terms of lowest bias and RMSE is obtained by the GPH and modified GPH estimator of [McCloskey and Perron \(2013\)](#). Further, the trimmed local Whittle estimator of [Iacone \(2010\)](#) exhibits a comparable small bias and RMSE for $\phi = 0$. In the next step, we compare the modified methods to the respective standard estimators. The modified estimator of [Hou and Perron \(2014\)](#) is outperforming the local Whittle estimator for all combinations in terms of bias and RMSE. Generally, the estimator is improving the performance with a larger bandwidth, except for situations with a larger autoregressive parameter of the ARFIMA model. The performance of the estimator of [Iacone \(2010\)](#) is very similar with an even smaller bias and RMSE for $\phi = 0.0$ and for

$\phi = 0.3$ combined with a smaller bandwidth. Although the trimmed GPH estimator of McCloskey and Perron (2013) performs well in terms of the bias for $\phi \leq 0.3$, the inflated variance increases the RMSE compared to the GPH estimator in most cases. The estimator of Smith (2005) performs better with an increasing autoregressive parameter and for a larger bandwidth. However, the three estimation methods developed for perturbed fractional processes are not an alternative to the standard methods. For the trimmed local Whittle estimator the reduction of the RMSE is in the range of 60% – 80% for $\phi = 0.0$ and still between 30% – 75% for $\phi = 0.3$. In contrast to the aforementioned estimator, the estimator of Hou and Perron (2014) has a smaller reduction of the RMSE for $\phi = 0.0$ with 20% – 65% due to the higher bias. For $\phi = 0.3$ the reduction of the RMSE of \hat{d}_{HP} is very similar to the estimator of Iacone (2010) with 35% – 80% and still between 20% – 75% for $\phi = 0.6$ except for $d = 0.4$. The estimator of Smith (2005) provides a smaller reduction of the RMSE compared to the estimator of Hou and Perron (2014) for the highest value of the autoregressive parameter with 5% – 50%.

d	$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$					
	0.0		0.2		0.4		0.0		0.2		0.4		0.0		0.2		0.4	
δ	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79
	Bias																	
d_{LW}	0.340	0.257	0.159	0.090	0.019	-0.047	0.319	0.270	0.159	0.121	0.033	-0.012	0.339	0.335	0.207	0.197	0.090	0.044
d_{GPH}	0.322	0.225	0.152	0.077	0.020	-0.049	0.304	0.251	0.157	0.120	0.037	-0.008	0.337	0.336	0.210	0.206	0.096	0.054
d_{HP}	0.039	0.017	-0.049	-0.075	-0.128	-0.185	0.089	0.116	0.015	0.026	-0.083	-0.108	0.235	0.282	0.149	0.161	0.034	-0.028
d_{IAC}	0.100	0.035	-0.013	-0.070	-0.102	-0.185	0.121	0.129	0.033	0.037	-0.059	-0.100	0.252	0.328	0.172	0.191	0.062	-0.018
d_{MCP}	0.058	0.026	-0.037	-0.059	-0.089	-0.138	0.106	0.131	0.026	0.050	-0.038	-0.053	0.261	0.306	0.174	0.190	0.082	0.037
d_{SMI}	0.570	0.429	0.337	0.228	0.160	0.086	0.505	0.373	0.292	0.204	0.142	0.083	0.418	0.347	0.244	0.225	0.136	0.135
d_{LPW}	0.479	0.371	0.266	0.181	0.104	0.038	0.428	0.338	0.234	0.171	0.095	0.049	0.374	0.343	0.217	0.215	0.114	0.108
d_{LWN}			0.491	0.459	0.228	0.204			0.403	0.310	0.190	0.148			0.287	0.256	0.161	0.165
d_{LPWN11}			0.455	0.434	0.198	0.182			0.379	0.300	0.170	0.131			0.281	0.247	0.151	0.141
	RMSE																	
d_{LW}	0.350	0.266	0.175	0.108	0.068	0.068	0.330	0.277	0.174	0.133	0.071	0.048	0.347	0.339	0.217	0.202	0.106	0.061
d_{GPH}	0.335	0.236	0.174	0.098	0.079	0.074	0.317	0.259	0.176	0.134	0.080	0.053	0.348	0.342	0.223	0.213	0.117	0.074
d_{HP}	0.147	0.072	0.135	0.103	0.175	0.199	0.152	0.133	0.107	0.065	0.136	0.130	0.254	0.287	0.171	0.169	0.098	0.079
d_{IAC}	0.158	0.084	0.115	0.104	0.150	0.201	0.166	0.148	0.113	0.085	0.124	0.125	0.274	0.336	0.202	0.206	0.121	0.082
d_{MCP}	0.224	0.126	0.221	0.121	0.202	0.170	0.230	0.158	0.173	0.097	0.160	0.096	0.291	0.313	0.212	0.200	0.139	0.077
d_{SMI}	0.589	0.445	0.366	0.251	0.206	0.130	0.526	0.389	0.325	0.229	0.194	0.130	0.444	0.364	0.278	0.245	0.186	0.164
d_{LPW}	0.493	0.382	0.286	0.198	0.141	0.082	0.442	0.348	0.255	0.188	0.134	0.086	0.390	0.352	0.237	0.226	0.144	0.125
d_{LWN}			0.520	0.484	0.269	0.238			0.437	0.339	0.233	0.185			0.310	0.269	0.189	0.189
d_{LPWN11}			0.489	0.463	0.244	0.222			0.415	0.330	0.214	0.171			0.304	0.259	0.176	0.166

Table 3.3: DGP3: ARFIMA (1,d,0) plus stationary RLS for T=1024

Table 3.3 presents the results for a stationary random level shift as contamination. In general, the results of the non-stationary RLS in the Supplementary Materials have a similar pattern but with a larger bias due to the non-stationarity and, thus, an increased RMSE. Three out of the four modified estimators developed especially for low frequency contaminations, such as a random level shifts, are improving the standard methods especially for smaller persistence values. The highest reduction in the RMSE for the estimation methods of Hou and Perron (2014), Iacone (2010) and McCloskey and Perron (2013) is obtained for $\phi = 0.3$ with 50% – 55%, 35% – 50% and 1% – 35%, respectively,

and with less improvement for an increased short-run effect. The performance of \hat{d}_{SMI} is rather unexpected and shows no improvement against the GPH estimator. The poor results of Smith (2005) are stressed by the fact that the estimator of Andrews and Sun (2004) is outperforming \hat{d}_{SMI} , though the estimator of Smith (2005) has originally been developed for random level shifts, unlike \hat{d}_{LPW} . The three estimation methods not explicitly developed for low frequency contaminations are offering no improvement. Nevertheless, compared to the sinus trend above the bias and RMSE decreased and the findings are getting closer to the other modified estimators, especially for a higher short-run dynamic.

d	$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$					
	0.2		0.4		0.6		0.2		0.4		0.6		0.2		0.4		0.6	
δ	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79
	Bias																	
d_{LW}	-0.134	-0.144	-0.227	-0.258	-0.333	-0.393	-0.105	-0.105	-0.196	-0.228	-0.322	-0.380	-0.034	-0.040	-0.150	-0.191	-0.300	-0.368
d_{GPH}	-0.132	-0.141	-0.225	-0.257	-0.339	-0.406	-0.100	-0.102	-0.191	-0.225	-0.329	-0.394	-0.032	-0.036	-0.145	-0.188	-0.304	-0.381
d_{HP}	-0.151	-0.155	-0.273	-0.298	-0.459	-0.504	-0.123	-0.115	-0.243	-0.267	-0.455	-0.498	-0.046	-0.046	-0.191	-0.232	-0.433	-0.492
d_{IAC}	-0.148	-0.154	-0.284	-0.323	-0.469	-0.529	-0.112	-0.108	-0.255	-0.288	-0.458	-0.519	-0.012	-0.032	-0.193	-0.262	-0.435	-0.521
d_{MCP}	-0.176	-0.179	-0.330	-0.336	-0.506	-0.539	-0.132	-0.117	-0.296	-0.297	-0.508	-0.529	-0.050	-0.046	-0.233	-0.259	-0.467	-0.532
d_{SMI}	-0.112	-0.126	-0.153	-0.190	-0.189	-0.271	-0.091	-0.103	-0.125	-0.157	-0.172	-0.256	-0.055	-0.040	-0.083	-0.110	-0.147	-0.234
d_{LPW}	-0.125	-0.136	-0.184	-0.216	-0.246	-0.314	-0.107	-0.107	-0.157	-0.185	-0.233	-0.297	-0.053	-0.037	-0.116	-0.136	-0.207	-0.279
d_{LWN}	0.013	0.003	-0.011	-0.003	-0.013	0.000	0.029	-0.004	-0.004	-0.014	-0.002	0.008	0.035	0.012	-0.009	0.008	0.000	0.015
d_{LPWN11}	-0.010	-0.024	-0.055	-0.049	-0.061	-0.042	0.007	-0.023	-0.040	-0.052	-0.046	-0.034	0.025	-0.001	-0.032	-0.036	-0.044	-0.031
	RMSE																	
d_{LW}	0.142	0.148	0.231	0.260	0.335	0.394	0.115	0.110	0.200	0.230	0.324	0.381	0.056	0.050	0.155	0.193	0.301	0.369
d_{GPH}	0.145	0.148	0.233	0.260	0.343	0.408	0.117	0.110	0.199	0.228	0.333	0.396	0.067	0.056	0.154	0.192	0.309	0.383
d_{HP}	0.161	0.160	0.281	0.302	0.469	0.508	0.134	0.120	0.253	0.271	0.466	0.502	0.070	0.057	0.202	0.237	0.448	0.498
d_{IAC}	0.183	0.172	0.303	0.333	0.481	0.535	0.156	0.130	0.278	0.299	0.471	0.525	0.105	0.084	0.219	0.273	0.450	0.528
d_{MCP}	0.248	0.211	0.375	0.349	0.594	0.550	0.378	0.142	0.359	0.312	0.565	0.540	0.223	0.096	0.282	0.279	0.609	0.545
d_{SMI}	0.162	0.149	0.191	0.204	0.215	0.279	0.150	0.129	0.168	0.176	0.200	0.264	0.135	0.088	0.136	0.134	0.176	0.245
d_{LPW}	0.146	0.146	0.198	0.222	0.253	0.316	0.132	0.118	0.173	0.191	0.240	0.299	0.093	0.062	0.133	0.143	0.214	0.281
d_{LWN}	0.193	0.188	0.186	0.175	0.160	0.143	0.186	0.148	0.172	0.152	0.162	0.141	0.130	0.088	0.140	0.128	0.149	0.138
d_{LPWN11}	0.175	0.173	0.186	0.180	0.179	0.163	0.170	0.137	0.166	0.169	0.174	0.158	0.118	0.072	0.156	0.130	0.159	0.153

Table 3.4: DGP8: ARFIMA (1,d,0) plus ARMA(0,0) for T=1024

After two typical examples of low frequency contaminations in the form of a time trend and level shift, we consider the effect of an additive noise term with the results given in Table 3.4. Overall the estimators of Smith (2005), Hurvich et al. (2005) and Frederiksen et al. (2012) are the three best performing estimation methods in terms of bias and RMSE. In the following, we compare the modified methods to the respective standard estimators. As expected, the three estimation methods developed for perturbed fractional processes are dominating the standard methods in terms of a lower bias and RMSE, although a RMSE reduction is restricted to larger memory values of $d \geq 0.4$. Additionally, the estimator of Smith (2005) performs well compared to the GPH estimator. The reduction of the RMSE for the estimators of Smith (2005) and Andrews and Sun (2004) is decreasing over the ϕ interval and ranging from 20%-30% to 15%-30% and finally to 10%-30%. A similar but slightly larger reduction of the RMSE is obtained for the estimation methods of Hurvich et al. (2005) and Frederiksen et al. (2012) with 20%-

60%, 15%-60% and still 5%-60% for the same aforementioned region of ϕ . The largest reduction is gained for $d = 0.6$ and $\delta = 0.79$, irrespectively of the previous estimation methods. In the presence of an additive noise term the two standard methods are more robust than the four modified estimators developed for low frequency contaminations, except for [Smith \(2005\)](#).

d	$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$					
	0.0		0.4		0.6		0.0		0.4		0.6		0.0		0.4		0.6	
δ	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79	0.70	0.79
	Bias																	
<i>d_{LW}</i>	0.221	0.157	-0.131	-0.188	-0.283	-0.356	0.212	0.167	-0.120	-0.169	-0.275	-0.347	0.225	0.196	-0.086	-0.150	-0.262	-0.339
<i>d_{GPH}</i>	0.205	0.134	-0.137	-0.199	-0.293	-0.374	0.199	0.149	-0.123	-0.178	-0.281	-0.366	0.220	0.190	-0.087	-0.157	-0.269	-0.358
<i>d_{HP}</i>	0.031	0.016	-0.274	-0.307	-0.476	-0.523	0.049	0.048	-0.248	-0.280	-0.465	-0.515	0.118	0.119	-0.195	-0.257	-0.448	-0.517
<i>d_{IAC}</i>	0.041	0.014	-0.272	-0.320	-0.462	-0.532	0.048	0.048	-0.249	-0.290	-0.447	-0.523	0.125	0.133	-0.193	-0.273	-0.431	-0.521
<i>d_{MCP}</i>	0.005	-0.007	-0.317	-0.333	-0.502	-0.543	-0.045	0.043	-0.290	-0.295	-0.443	-0.532	0.118	0.120	-0.217	-0.275	-0.464	-0.533
<i>d_{SMI}</i>	0.399	0.276	0.022	-0.069	-0.101	-0.205	0.368	0.259	0.024	-0.054	-0.089	-0.198	0.325	0.262	0.037	-0.028	-0.086	-0.180
<i>d_{LPW}</i>	0.329	0.237	-0.040	-0.112	-0.174	-0.257	0.303	0.230	-0.035	-0.093	-0.165	-0.250	0.280	0.240	-0.013	-0.068	-0.155	-0.234
<i>d_{LWN}</i>			0.205	0.201	0.077	0.087			0.179	0.174	0.075	0.085			0.149	0.161	0.063	0.094
<i>d_{LPWN11}</i>			0.154	0.164	0.031	0.046			0.135	0.137	0.030	0.049			0.114	0.119	0.019	0.049
	RMSE																	
<i>d_{LW}</i>	0.233	0.168	0.146	0.194	0.332	0.385	0.223	0.175	0.134	0.175	0.280	0.349	0.236	0.203	0.103	0.155	0.267	0.342
<i>d_{GPH}</i>	0.220	0.146	0.154	0.206	0.300	0.377	0.213	0.159	0.140	0.185	0.289	0.370	0.234	0.197	0.110	0.164	0.276	0.361
<i>d_{HP}</i>	0.108	0.058	0.292	0.313	0.490	0.528	0.112	0.073	0.267	0.286	0.480	0.520	0.148	0.129	0.219	0.266	0.465	0.522
<i>d_{IAC}</i>	0.115	0.076	0.293	0.329	0.474	0.537	0.116	0.090	0.270	0.301	0.460	0.528	0.166	0.153	0.221	0.284	0.445	0.526
<i>d_{MCP}</i>	0.465	0.112	0.402	0.351	0.573	0.556	2.195	0.099	0.339	0.312	1.551	0.543	0.336	0.147	0.275	0.295	0.497	0.546
<i>d_{SMI}</i>	0.424	0.295	0.132	0.117	0.157	0.224	0.392	0.277	0.130	0.106	0.146	0.215	0.354	0.281	0.134	0.094	0.150	0.198
<i>d_{LPW}</i>	0.345	0.251	0.103	0.131	0.193	0.265	0.320	0.242	0.098	0.114	0.183	0.257	0.299	0.252	0.087	0.091	0.174	0.242
<i>d_{LWN}</i>			0.271	0.260	0.180	0.168			0.252	0.236	0.173	0.170			0.223	0.218	0.175	0.171
<i>d_{LPWN11}</i>			0.244	0.242	0.178	0.168			0.227	0.220	0.170	0.167			0.200	0.197	0.171	0.168

Table 3.5: DGP9: ARFIMA (1,d,0) plus stationary RLS plus additive noise for T=1024

The last detailed DGP in Table 3.5 contains two groups of contamination, that is a stationary random level shift and an additive noise term. The overall outcome combines the individual results of each contamination type from Table 3.3 and Table 3.4. Excluding the short-memory process, the estimators of [Smith \(2005\)](#) and [Andrews and Sun \(2004\)](#) perform best in terms of bias and RMSE. For $d \geq 0.4$ the reduction of the RMSE to the respective standard method of [Smith \(2005\)](#) and [Andrews and Sun \(2004\)](#) equals on average 30%, irrespectively of the short-run influence. On the contrary, the estimators of [Iacone \(2010\)](#) and [Hou and Perron \(2014\)](#) provide the best results for a short-memory process being contaminated. With an increasing influence of the short-run dynamic, the reduction of the RMSE for $d = 0$ decreases on average from 55% – 50% – 30% for the estimators of [Iacone \(2010\)](#) and [Hou and Perron \(2014\)](#). Therefore, no procedure provides stable results over the whole range of the persistence parameter in the case of two contamination types.

In the following we give a broad user-guideline by focusing on the RMSE. Usually, an economist is not aware of specific trends, level shifts or perturbation types when empirical data are analyzed. In the following, we compare the effects of two possible scenarios. The first situation is characterized by a perturbation process and instead of using the

more appropriate estimators designed for this specific case one falsely applies estimation methods developed for low frequency contamination. The Monte Carlo results indicate a moderate increase of the RMSE for low frequency contaminated estimators, apart from $d = 0.6$. The next scenario summarizes the reverse case, which means that for a low frequency contaminated process the estimators developed to capture perturbation are used. Depending on the specific type of low frequency contamination the Monte Carlo study shows mixed results. Considering a sinus trend or deterministic level shift the RMSE increases substantially for the perturbation estimators, in some cases three times as much as the estimators developed for low frequency contamination. The increase of the RMSE for a (non-)stationary RLS is lower than for the two aforementioned processes but still more than twice as high as the RMSE of low frequency contaminated estimators. The random level shift process plus an additive noise term shows slightly higher root mean squared errors. Considering the three different types of random level shifts an improvement of the RMSE is obtained for $d = 0.6$ when the perturbation estimators are used instead of the methods designed for low frequency contamination. Therefore, we recommend the estimators developed for low frequency contamination since the increase in a perturbation setup is not so severe as in the reverse case, especially in the stationary region of the memory parameter.

To sum up, our results show a good performance of \hat{d}_{SMI} in situations of a high short-run dynamic and in typical perturbation situations, however in cases of low frequency contaminations the estimator shows some weaknesses. The estimator of [Iacone \(2010\)](#) and [Hou and Perron \(2014\)](#) perform very similar in terms of bias and RMSE, whereas \hat{d}_{HP} is slightly better. In many situations the estimator of [McCloskey and Perron \(2013\)](#) cannot compete with the other modified estimators developed for low frequency contamination in terms of RMSE due to the higher variance. Finally, the estimator of [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) yield almost identical findings which are in most situations better than the results of [Andrews and Sun \(2004\)](#).

4 Application

In this section we analyze the daily log-absolute return series of the S&P 500 from 1 January 1997 to 31 October 2017 ($T=5245$) to investigate the robustness of the aforementioned results to the choice of estimator. Furthermore, we apply methods robust to perturbation as well as to low frequency contaminations which gives us additional insights which of these effects if not both are of relevance in our data set. We follow the method of [Xu and Perron \(2014\)](#) and calculate the log-absolute returns as $\log(|r_t| + 0.001)$. The log-returns are obtained by differencing the logarithm of the price index, $r_t = \log(p_t) - \log(p_{t-1})$, and the constant 0.001 is added to avoid the problem of

taking the logarithm of zero. Figure 4.1 displays the time series of the S&P 500 with the hyperbolically decaying autocorrelation function and the periodogram with a pole at the origin, as typical characteristics of a long-memory process.

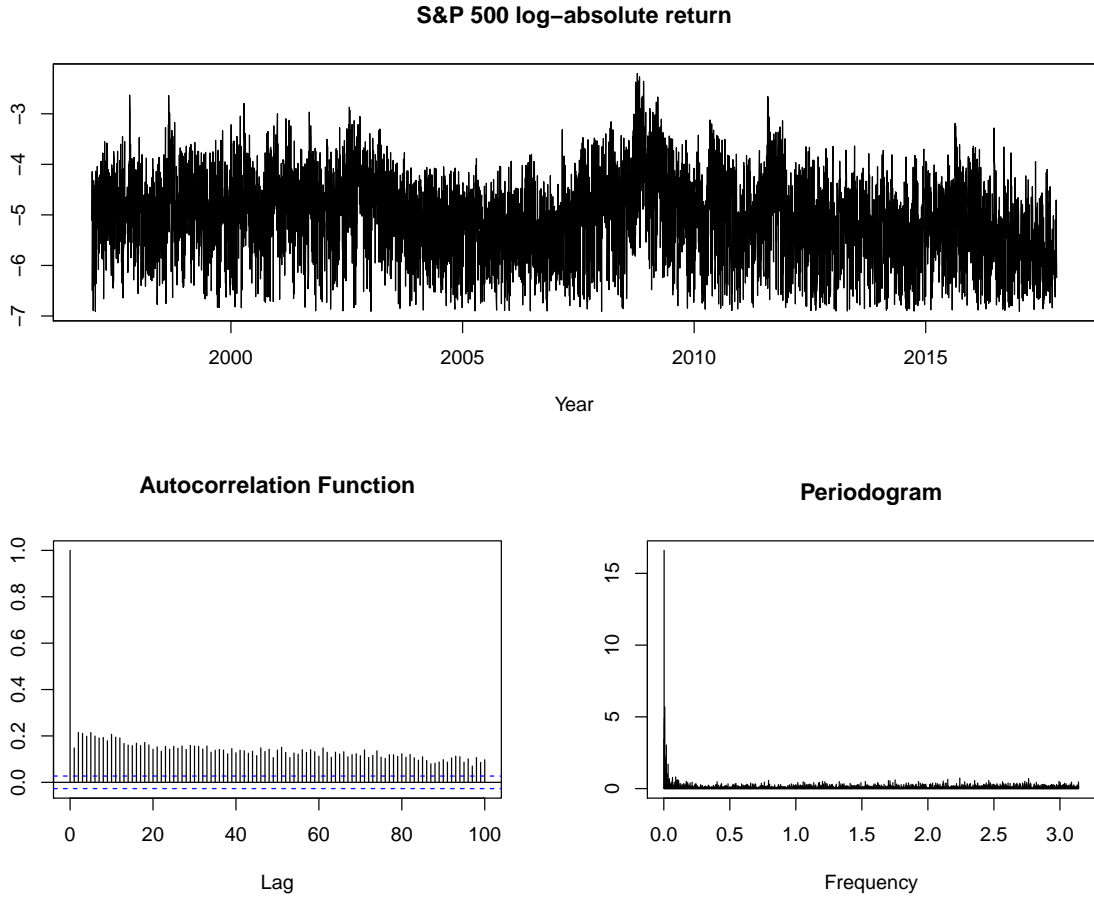


Figure 4.1: The log-absolute return series of the S&P 500 with the corresponding autocorrelation function and periodogram

We estimate the persistence parameter with nine different estimation methods and vary the bandwidth parameter accordingly to our Monte Carlo study with $m = \lfloor 1 + T^\delta \rfloor$ and $\delta = 0.60, 0.70, 0.79$. The parameter settings of the corresponding estimation methods remain unchanged to the simulation study above. Table 4.1 shows the estimation results of \hat{d} and the standard errors which are given in brackets below. Additionally, we apply the univariate test of Qu (2011) to test the null hypothesis of a true long-memory process against spurious long memory. The test statistics are given in the last column of Table 4.1. We set the trimming parameter of Qu (2011) to $\varepsilon_{Qu} = 0.02$ and the critical value equals 1.517 at the 1% significance level.

In general, the memory parameters decrease with an increased bandwidth, with the exception of \hat{d}_{LWN} and \hat{d}_{LPWN11} . This finding gives a first hint that the series might be contaminated since the long-memory component dominates for higher frequencies in a

contaminated process (cf. Perron and Qu (2010)). The estimators of Iacone (2010), Hou and Perron (2014) and McCloskey and Perron (2013) are downward biased compared to the respective non-modified standard method. Especially for the highest bandwidth ($m = \lfloor 1 + 5245^{0.79} \rfloor = 869$) the reduction of the memory is extremely strong with less than half of the memory value for \hat{d}_{HP} and \hat{d}_{IAC} compared to \hat{d}_{LW} . This downward pattern of the estimators for an increased bandwidth suggests the existence of low frequency contaminations in the log-absolute return series of the S&P 500. This interpretation is in line with the test results of Qu (2011). The test rejects the null hypothesis for $\delta = 0.70$ and $\delta = 0.79$ at the 1% significance level and is therefore suggesting that the S&P 500 series follows a spurious long-memory process.

δ/\hat{d}	LW	GPH	HP	IAC	MCP	SMI	LPW	LWN	LPWN11	Qu test
0.60	0.453 (0.038)	0.493 (0.049)	0.353 (0.038)	0.339 (0.086)	0.506 (0.055)	0.570 (0.100)	0.521 (0.057)	0.608 (0.039)	0.603 (0.138)	0.910
0.70	0.383 (0.025)	0.408 (0.032)	0.270 (0.025)	0.313 (0.056)	0.349 (0.041)	0.534 (0.061)	0.489 (0.037)	0.585 (0.026)	0.473 (0.103)	1.836*
0.79	0.284 (0.017)	0.275 (0.022)	0.133 (0.017)	0.125 (0.038)	0.156 (0.033)	0.483 (0.040)	0.390 (0.025)	0.629 (0.017)	0.589 (0.062)	3.727*

Table 4.1: \hat{d} estimates and the corresponding standard errors in brackets below for different bandwidths $m = \lfloor 1 + T^\delta \rfloor$ with * denoting significance at 1% level

Contrary to this finding, the other four estimation methods present upward biased estimator of \hat{d} in a non-stationary region compared to the local Whittle or GPH estimator. The estimator of Andrews and Sun (2004) increases less than the other estimators and lies only for $\delta = 0.60$ in the non-stationary region. However, the estimators of Smith (2005), Frederiksen et al. (2012) and especially the one of Hurvich et al. (2005) are showing larger memory parameters in the non-stationary region. The estimation results of Hurvich et al. (2005) and Frederiksen et al. (2012) are very similar. As expected from the simulation study, the estimator of Smith (2005) behaves rather unexpected since it is an estimator originally designed to capture low frequency contaminations instead of perturbation.

The estimators developed to capture perturbation are in the non-stationary region and combined with downward biased standard estimators and even more biased modified estimators for low frequency contamination a perturbed fractional process may be possible (cf. Wenger et al. (2017)). Our findings are in line with those of McCloskey and Perron (2013) and Frederiksen et al. (2012) whereas the interpretation of the latter authors differs to our interpretation of a spurious long-memory process. We conclude that the analyzed time series follows rather a spurious long-memory process than a perturbed

fractional process. Additionally to the estimation results this interpretation is supported by a formal test of [Qu \(2011\)](#) and the current literature of spurious long memory (cf. [Lu and Perron \(2010\)](#) or [Qu and Perron \(2013\)](#)). Without the test results of [Qu \(2011\)](#) a perturbed fractional process would be an alternative conclusion.

To sum up, the two standard methods indicate a stationary long-memory process, whereas the methods of [Iacone \(2010\)](#), [Hou and Perron \(2014\)](#) and [McCloskey and Perron \(2013\)](#) rather suggest a weakly stationary long-memory process, especially for the highest bandwidth. The other four modified estimation methods are implying a non-stationary long-memory process.

5 Conclusion

In this paper we analyze the performs of nine semiparametric estimation methods and compare them in a simulation study. The Monte Carlo study suggests either to use the estimator of [Iacone \(2010\)](#) or [Hou and Perron \(2014\)](#) in cases of low frequency contaminations. Although the estimator of [McCloskey and Perron \(2013\)](#) yield comparable estimation results, it suffers from a higher variance. The performance of the estimator of [Smith \(2005\)](#) in cases of high short-run dynamics or perturbation is comparable to the standard perturbation methods, although the estimator has originally been developed for low frequency contamination. However, in the latter situation the estimator is no alternative to its competitors. Furthermore, the estimator of [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) yield almost identical findings which are in most situations better than the results of [Andrews and Sun \(2004\)](#). Based on the Monte Carlo results we recommend to apply the low frequency estimators when its unclear whether a low frequency contamination or a perturbed fractional process is present. In our empirical example we consider the log-absolute return series of the S&P 500. The downward pattern of [Iacone \(2010\)](#), [Hou and Perron \(2014\)](#) and [McCloskey and Perron \(2013\)](#) as the bandwidth increases combined with a rejection of the null hypothesis of a true long-memory process by the test of [Qu \(2011\)](#) suggests a spurious long-memory process. This paper presents the strength and weaknesses of the different semiparametric estimation methods and provide some user-guidelines.

Supplementary Material to An Overview of Modified Semi-parametric Memory Estimation Methods

This Supplementary Material contains the simulation results of the Monte Carlo Analysis. The following tables present the bias and root mean squared error (RMSE) results of nine different estimation methods. The structure of the tables is similar for all DGPs: each table is divided into three subtables by the degree of short-run dynamics with $\phi = 0.0, 0.3, 0.6$. The separate tables consider four values of the persistence parameter ($d = 0.0, 0.2, 0.4, 0.6$) and three different values of the bandwidth parameter ($m = \lfloor 1 + T^\delta \rfloor$ with $\delta = 0.60, 0.70, 0.79$) depending on the sample size with $T = 256, 512, 1024, 4096$.

In the following, we provide a brief summary of the simulation results. The first DGP is an ARFIMA (1,d,0) process without any form of contamination. In this case, the two standard estimation methods of [Geweke and Porter-Hudak \(1983\)](#) and [Kuensch \(1987\)](#) are very robust compared to the modified methods and the overall bias and root mean squared errors are rather low compared to the other DGPs. The estimator of [Smith \(2005\)](#) and [Andrews and Sun \(2004\)](#) show a slightly lower bias for $\phi \geq 0.3$ and in terms of the RMSE the two estimator improve their performance for the two higher bandwidth values of $\delta = 0.70$ and $\delta = 0.79$.

The second DGP considers a sinus trend as contamination. In terms of bias, the estimator of [Hou and Perron \(2014\)](#) and [Iacone \(2010\)](#) improve the performance of the standard methods over the whole parameter setting and [McCloskey and Perron \(2013\)](#) exhibit an improvement with their estimator for $\phi \leq 0.3$. However, in terms of the RMSE only the approach of [Iacone \(2010\)](#) improves the local Whittle estimator overall and the method of [Hou and Perron \(2014\)](#) for a smaller memory value of $d \leq 0.2$.

The third DGP adds a stationary random level shift (RLS) to the ARFIMA (1,d,0) process. For smaller memory parameter values the modified estimators of [Hou and Perron \(2014\)](#), [Iacone \(2010\)](#) and [McCloskey and Perron \(2013\)](#) improve the bias and RMSE of the respective standard methods, whereas the estimator of [Andrews and Sun \(2004\)](#) dominates for $d = 0.6$. The next DGP considers a non-stationary RLS and the overall performance of the estimators is very similar to the aforementioned stationary RLS, especially for the higher sample sizes.

Table 5.9 and Table 5.10 exhibit the simulation results of a deterministic level shift as low frequency contamination. Considering the bias, the estimation method of [Hou and Perron \(2014\)](#) improves the local Whittle estimator over the whole parameter setting, whereas the estimator of [Iacone \(2010\)](#) reduces the bias up to $\phi \leq 0.3$ and the estimator of [Smith \(2005\)](#) for $\phi = 0.6$

The effect of a GARCH(1,1) process as contamination is captured by the sixth DGP.

The two estimation methods of [Hou and Perron \(2014\)](#) and [Andrews and Sun \(2004\)](#) reduce the bias of the corresponding standard method for $\phi \geq 0.3$. Nevertheless, in terms of the RMSE the two standard methods outperform the modified estimation procedures. The estimation methods developed for perturbed fractional processes outperform the other methods in [Table 5.13](#) and [Table 5.14](#) for an ARFIMA (1,d,0) plus ARMA(0,0) process. Especially the methods of [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) dominate the standard methods in terms of a lower bias. Additionally, the methods of [Smith \(2005\)](#) and [Andrews and Sun \(2004\)](#) perform well for $d \geq 0.4$. Replacing the white noise process by an ARMA(0,1) process as contamination changes the results slightly but without an overall alteration of the performance.

The last DGP considers two types of contamination, a stationary random level shift and an additive noise term. For a short-memory process being contaminated the best results in terms of RMSE are achieved by [Hou and Perron \(2014\)](#) and [Iacone \(2010\)](#). For the non-stationary ARFIMA (1,d,0) process the methods of [Smith \(2005\)](#), [Andrews and Sun \(2004\)](#), [Hurvich et al. \(2005\)](#) and [Frederiksen et al. \(2012\)](#) dominate the other methods. For the cases $d = 0.2$ and $d = 0.4$ the best results are obtained by the two standard methods. Therefore, for this DGP no estimation method dominates over the whole setup.

d	T/δ	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$				
		0.0	0.2	0.4	0.6	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	
d_{1W}	256	0.120	0.086	0.063	0.119	0.084	0.068	0.120	0.084	0.067	0.125	0.091	0.067	0.125	0.091	0.067
	512	0.093	0.065	0.045	0.094	0.065	0.047	0.094	0.064	0.049	0.095	0.068	0.052	0.089	0.066	0.052
	1024	0.076	0.047	0.034	0.072	0.048	0.033	0.072	0.046	0.036	0.071	0.053	0.037	0.074	0.053	0.037
	4096	0.044	0.027	0.019	0.046	0.029	0.019	0.043	0.029	0.020	0.043	0.030	0.020	0.044	0.030	0.020
d_{1PW}	256	0.156	0.106	0.082	0.152	0.104	0.087	0.151	0.108	0.081	0.157	0.112	0.086	0.156	0.115	0.086
	512	0.121	0.082	0.059	0.112	0.079	0.059	0.117	0.082	0.060	0.120	0.087	0.065	0.114	0.089	0.066
	1024	0.092	0.059	0.045	0.094	0.060	0.044	0.091	0.059	0.044	0.094	0.067	0.046	0.090	0.073	0.046
	4096	0.056	0.035	0.025	0.058	0.038	0.024	0.056	0.036	0.025	0.060	0.038	0.026	0.057	0.040	0.026
d_{1P}	256	0.169	0.108	0.075	0.191	0.120	0.086	0.230	0.154	0.113	0.344	0.242	0.191	0.149	0.140	0.167
	512	0.119	0.077	0.051	0.138	0.087	0.058	0.171	0.106	0.075	0.235	0.152	0.111	0.108	0.085	0.136
	1024	0.094	0.057	0.038	0.092	0.057	0.039	0.115	0.065	0.049	0.153	0.092	0.073	0.084	0.060	0.110
	4096	0.050	0.030	0.019	0.055	0.032	0.021	0.061	0.034	0.023	0.082	0.043	0.029	0.050	0.032	0.068
d_{1M}	256	0.345	0.218	0.158	0.327	0.214	0.161	0.323	0.220	0.160	0.339	0.218	0.167	0.325	0.216	0.160
	512	0.246	0.157	0.114	0.243	0.156	0.109	0.249	0.162	0.112	0.250	0.164	0.112	0.239	0.156	0.114
	1024	0.174	0.114	0.083	0.180	0.118	0.081	0.185	0.114	0.082	0.186	0.121	0.088	0.178	0.121	0.086
	4096	0.110	0.065	0.045	0.109	0.068	0.043	0.114	0.069	0.045	0.112	0.070	0.046	0.110	0.066	0.047
d_{1C}	256	0.233	0.176	0.137	0.238	0.184	0.136	0.245	0.179	0.148	0.236	0.186	0.146	0.244	0.233	0.239
	512	0.191	0.132	0.101	0.197	0.143	0.104	0.192	0.146	0.108	0.186	0.138	0.109	0.186	0.175	0.248
	1024	0.156	0.106	0.075	0.151	0.101	0.074	0.146	0.100	0.080	0.151	0.106	0.081	0.154	0.127	0.199
	4096	0.096	0.062	0.042	0.095	0.061	0.045	0.096	0.060	0.043	0.096	0.062	0.046	0.098	0.068	0.126
d_{1CP}	256	1.635	0.376	0.269	1.682	0.383	0.176	1.711	0.384	0.375	1.716	0.352	0.151	1.734	0.398	0.250
	512	1.250	0.429	0.151	1.253	0.251	0.121	1.208	0.236	0.091	1.230	0.475	0.070	1.233	0.267	0.209
	1024	0.894	2.867	0.109	0.898	0.632	0.078	0.886	0.106	0.533	0.850	0.110	0.046	0.906	0.457	0.172
	4096	0.416	2.926	0.047	0.433	0.074	0.034	0.429	0.044	0.027	0.411	0.038	0.026	1.084	0.095	0.113
d_{1PW}	256	0.218	0.146	0.101	0.223	0.140	0.109	0.217	0.142	0.106	0.215	0.147	0.110	0.216	0.144	0.108
	512	0.164	0.108	0.077	0.159	0.103	0.073	0.160	0.105	0.072	0.160	0.107	0.078	0.154	0.104	0.078
	1024	0.119	0.074	0.055	0.115	0.078	0.052	0.122	0.075	0.054	0.124	0.081	0.057	0.117	0.077	0.056
	4096	0.072	0.042	0.029	0.070	0.043	0.029	0.072	0.043	0.029	0.072	0.046	0.031	0.072	0.042	0.030
d_{1WW}	256	0.306	0.271	0.217	0.306	0.271	0.217	0.240	0.179	0.138	0.198	0.151	0.115	0.216	0.144	0.108
	512	0.241	0.210	0.150	0.241	0.210	0.150	0.195	0.135	0.099	0.150	0.110	0.084	0.235	0.147	0.134
	1024	0.189	0.136	0.093	0.188	0.136	0.093	0.138	0.087	0.069	0.117	0.082	0.065	0.189	0.106	0.106
	4096	0.123	0.075	0.051	0.123	0.075	0.051	0.088	0.051	0.037	0.074	0.048	0.035	0.117	0.062	0.067
d_{1PWN1}	256	0.276	0.240	0.187	0.276	0.240	0.187	0.220	0.162	0.120	0.187	0.141	0.104	0.268	0.140	0.104
	512	0.226	0.184	0.133	0.226	0.184	0.133	0.200	0.121	0.088	0.141	0.102	0.076	0.213	0.140	0.134
	1024	0.166	0.118	0.079	0.166	0.118	0.079	0.124	0.078	0.051	0.110	0.076	0.060	0.172	0.099	0.106
	4096	0.107	0.065	0.042	0.107	0.065	0.042	0.078	0.047	0.033	0.070	0.045	0.033	0.103	0.057	0.067

Table 5.2: RMSE DGPI: ARFIMA (1,d,0)

d	T/δ	$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$						$\phi = 0.6$									
		0.0		0.2		0.4		0.6		0.79		0.60		0.70		0.79		0.60		0.70		0.79		0.60		0.70		0.79	
		0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	
d_{EW}	256	0.866	0.750	0.692	0.744	0.562	0.439	0.555	0.416	0.312	0.384	0.324	0.236	0.885	0.776	0.745	0.712	0.663	0.650	0.572	0.562	0.570	0.396	0.398	0.400	0.379	0.385	0.398	
	512	0.913	0.701	0.557	0.673	0.393	0.389	0.482	0.307	0.258	0.353	0.257	0.183	0.828	0.691	0.575	0.617	0.490	0.431	0.488	0.308	0.381	0.353	0.289	0.277	0.710	0.685	0.663	
	1024	0.865	0.661	0.524	0.614	0.457	0.350	0.417	0.287	0.215	0.300	0.208	0.142	0.782	0.614	0.527	0.560	0.432	0.375	0.393	0.300	0.268	0.300	0.231	0.215	0.703	0.614	0.596	
d_{GPT}	4096	0.790	0.598	0.471	0.527	0.382	0.287	0.315	0.214	0.149	0.200	0.130	0.080	0.719	0.549	0.445	0.477	0.352	0.292	0.294	0.208	0.180	0.198	0.140	0.129	0.642	0.518	0.491	
	256	0.830	0.216	0.152	0.271	0.182	0.126	0.239	0.102	0.112	0.204	0.144	0.104	0.331	0.286	0.227	0.291	0.256	0.272	0.249	0.230	0.254	0.237	0.221	0.257	0.414	0.456	0.460	
	512	0.254	0.164	0.108	0.212	0.133	0.089	0.168	0.107	0.073	0.158	0.097	0.069	0.259	0.207	0.225	0.218	0.180	0.207	0.182	0.162	0.197	0.175	0.160	0.196	0.309	0.350	0.440	
d_{MP}	1024	0.207	0.119	0.075	0.160	0.095	0.063	0.131	0.080	0.047	0.118	0.071	0.044	0.201	0.153	0.171	0.167	0.131	0.158	0.139	0.114	0.148	0.125	0.111	0.146	0.226	0.267	0.369	
	4096	0.125	0.063	0.036	0.096	0.050	0.028	0.073	0.037	0.021	0.064	0.035	0.019	0.120	0.077	0.097	0.094	0.064	0.090	0.076	0.055	0.085	0.066	0.054	0.085	0.132	0.143	0.255	
	256	0.544	-0.439	-0.307	0.224	-0.547	-0.353	0.212	-0.549	-0.437	0.256	-0.096	-0.374	0.033	-0.287	0.022	0.084	-0.306	-0.014	0.187	-0.200	-0.006	0.284	0.201	0.270	0.100	0.118	0.280	
d_{MC}	512	0.120	-0.398	-0.217	-0.209	-0.418	-0.223	-0.256	-0.437	-0.252	0.077	-0.330	-0.325	-0.383	-0.218	0.053	-0.471	-0.209	0.044	-0.282	0.236	0.032	0.089	0.057	0.233	-0.291	0.140	0.404	
	1024	0.475	0.287	0.179	0.370	0.234	0.146	0.303	0.187	0.113	0.258	0.161	0.102	0.436	0.257	0.155	0.553	0.215	0.125	0.279	0.171	0.101	0.246	0.153	0.090	0.374	0.227	0.190	
	4096	0.308	0.159	0.091	0.239	0.125	0.068	0.180	0.094	0.055	0.151	0.084	0.047	0.277	0.146	0.073	0.221	0.111	0.053	0.167	0.086	0.041	0.145	0.089	0.036	0.253	0.122	0.081	
d_{MC}	256	0.031	-0.018	-0.014	-0.026	-0.036	-0.036	-0.022	-0.060	0.031	-0.016	0.156	0.108	0.185	0.165	0.234	0.198	0.229	0.264	0.245	0.269	0.308	0.184	0.367	0.382	0.463	0.579	0.598	
	512	-0.027	-0.005	0.025	-0.047	-0.028	-0.023	-0.006	0.024	0.020	0.069	0.113	0.069	0.074	0.088	0.189	0.045	0.092	0.178	0.140	0.180	0.203	0.094	0.249	0.257	0.283	0.373	0.415	
	1024	-0.013	-0.002	-0.015	-0.064	-0.041	-0.007	0.002	0.020	0.006	0.062	0.081	0.044	-0.029	0.060	0.159	-0.015	0.045	0.131	0.058	0.086	0.148	0.199	0.142	0.156	0.178	0.252	0.371	
d_{MC}	4096	-0.015	-0.082	-0.006	-0.115	-0.012	-0.001	-0.040	0.000	0.000	0.083	0.035	0.019	-0.055	0.027	0.105	-0.087	0.022	0.083	-0.014	0.029	0.081	0.112	0.054	0.085	0.023	0.152	0.284	
	256	1.562	1.134	0.880	1.221	0.875	0.671	0.940	0.657	0.508	0.754	0.533	0.402	1.382	1.009	0.804	1.077	0.780	0.624	0.848	0.616	0.498	0.728	0.521	0.423	1.192	0.922	0.816	
	512	1.888	1.021	0.789	1.050	0.755	0.573	0.765	0.542	0.403	0.591	0.411	0.303	1.244	0.908	0.717	0.930	0.673	0.527	0.701	0.500	0.390	0.568	0.406	0.316	1.067	0.813	0.705	
d_{MC}	1024	1.261	0.928	0.719	0.919	0.665	0.501	0.644	0.448	0.329	0.475	0.324	0.233	1.136	0.830	0.650	0.827	0.593	0.457	0.501	0.413	0.314	0.459	0.315	0.238	0.884	0.735	0.625	
	4096	1.087	0.798	0.619	0.747	0.529	0.395	0.467	0.315	0.224	0.398	0.291	0.135	0.991	0.723	0.559	0.677	0.477	0.357	0.455	0.291	0.210	0.300	0.197	0.136	0.873	0.637	0.518	
	256	0.790	0.790	0.790	0.790	0.590	0.589	0.587	0.790	0.790	0.790	0.590	0.388	0.383	0.790	0.790	0.790	0.790	0.756	0.590	0.582	0.540	0.390	0.387	0.377	0.788	0.761	0.709	
d_{MC}	512	0.790	0.790	0.790	0.790	0.590	0.588	0.573	0.790	0.790	0.790	0.590	0.384	0.359	0.790	0.790	0.790	0.790	0.771	0.588	0.571	0.454	0.388	0.376	0.329	0.787	0.713	0.589	
	1024	0.790	0.790	0.790	0.790	0.590	0.582	0.507	0.790	0.790	0.790	0.590	0.387	0.299	0.790	0.789	0.674	0.589	0.546	0.372	0.286	0.347	0.257	0.386	0.347	0.257	0.789	0.673	0.499
	4096	0.793	0.730	0.741	0.533	0.470	0.331	0.357	0.252	0.172	0.698	0.707	0.558	0.698	0.629	0.373	0.593	0.318	0.299	0.438	0.236	0.150	0.348	0.236	0.150	0.609	0.629	0.373	
d_{MC}	256	0.790	0.790	0.790	0.790	0.590	0.589	0.587	0.790	0.790	0.790	0.590	0.388	0.382	0.790	0.790	0.790	0.790	0.756	0.590	0.582	0.540	0.390	0.387	0.377	0.788	0.761	0.709	
	512	0.790	0.790	0.790	0.790	0.590	0.588	0.573	0.790	0.790	0.790	0.590	0.384	0.358	0.790	0.790	0.790	0.790	0.771	0.588	0.571	0.453	0.388	0.376	0.328	0.786	0.712	0.588	
	1024	0.790	0.790	0.790	0.790	0.590	0.581	0.507	0.790	0.790	0.789	0.590	0.387	0.299	0.790	0.789	0.674	0.588	0.545	0.372	0.286	0.346	0.257	0.386	0.346	0.257	0.789	0.673	0.499
d_{MC}	4096	0.784	0.736	0.741	0.552	0.470	0.331	0.356	0.252	0.172	0.747	0.709	0.558	0.698	0.629	0.373	0.593	0.318	0.299	0.438	0.236	0.150	0.347	0.236	0.150	0.698	0.629	0.373	

Table 5.3: Bias DGP2: ARFIMA (1,d,0) plus sinus trend

d	T/\delta	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$																									
		0.0	0.2	0.4	0.6	0.79	0.6	0.70	0.79	0.60	0.70	0.79	0.0	0.2	0.4	0.6	0.70	0.79																			
d_{w}	256	0.496	0.393	0.314	0.296	0.208	0.138	0.135	0.058	-0.093	0.001	-0.083	-0.162	0.458	0.379	0.337	0.288	0.220	0.192	0.144	0.090	0.040	0.020	-0.055	-0.130	0.472	0.432	0.404	0.320	0.296	0.253	0.192	0.146	0.079	0.059	-0.021	-0.109
	512	0.504	0.393	0.301	0.303	0.214	0.135	0.140	0.058	-0.011	0.010	-0.071	-0.158	0.470	0.381	0.319	0.288	0.215	0.173	0.141	0.083	0.026	0.016	-0.063	-0.140	0.440	0.415	0.388	0.297	0.274	0.237	0.180	0.131	0.069	0.047	-0.022	-0.123
	1024	0.517	0.393	0.300	0.304	0.207	0.131	0.136	0.062	-0.016	0.016	-0.076	-0.161	0.486	0.376	0.311	0.282	0.201	0.158	0.137	0.064	0.016	0.017	-0.064	-0.148	0.440	0.391	0.370	0.273	0.245	0.223	0.154	0.121	0.063	0.048	-0.029	-0.128
	4096	0.542	0.387	0.296	0.308	0.197	0.119	0.133	0.048	-0.026	0.019	-0.075	-0.172	0.495	0.368	0.296	0.277	0.189	0.135	0.127	0.054	-0.006	0.024	-0.070	-0.161	0.438	0.357	0.330	0.251	0.199	0.192	0.127	0.085	0.044	0.031	-0.051	-0.147
d_{opt}	256	0.625	0.395	0.305	0.323	0.214	0.141	0.163	0.076	0.010	0.031	-0.065	-0.141	0.482	0.386	0.338	0.312	0.235	0.208	0.170	0.114	0.060	0.051	-0.032	-0.106	0.496	0.446	0.424	0.344	0.320	0.281	0.222	0.171	0.110	0.082	0.004	-0.085
	512	0.513	0.375	0.285	0.315	0.209	0.117	0.157	0.063	-0.015	0.028	-0.063	-0.161	0.475	0.366	0.301	0.288	0.213	0.170	0.157	0.090	0.031	0.037	-0.051	-0.135	0.449	0.413	0.392	0.314	0.284	0.249	0.200	0.144	0.084	0.065	-0.008	-0.115
	1024	0.516	0.354	0.240	0.305	0.183	0.097	0.147	0.051	-0.031	0.028	-0.077	-0.175	0.482	0.359	0.268	0.282	0.185	0.140	0.148	0.061	0.010	0.031	-0.064	-0.158	0.454	0.371	0.359	0.276	0.241	0.225	0.166	0.126	0.068	0.060	-0.026	-0.133
	4096	0.512	0.369	0.193	0.285	0.145	0.057	0.126	0.027	-0.056	0.021	-0.091	-0.205	0.460	0.291	0.211	0.253	0.145	0.090	0.120	0.037	-0.025	0.026	-0.083	-0.188	0.397	0.296	0.286	0.233	0.172	0.176	0.126	0.077	0.038	0.034	-0.059	-0.170
d_{tr}	256	0.602	-0.032	-0.013	-0.127	-0.123	-0.117	-0.222	-0.233	-0.237	-0.369	-0.424	-0.450	0.027	0.075	0.131	-0.065	-0.006	0.012	-0.166	-0.154	-0.160	-0.305	-0.351	-0.425	0.174	0.260	0.280	0.081	0.148	0.112	-0.037	-0.047	-0.150	-0.269	-0.364	-0.470
	512	-0.033	-0.009	-0.002	-0.105	-0.105	-0.105	-0.205	-0.209	-0.230	-0.340	-0.390	-0.439	0.022	0.055	0.116	-0.075	-0.023	0.007	-0.132	-0.129	-0.138	-0.321	-0.354	-0.394	0.123	0.245	0.280	0.070	0.140	0.143	-0.033	-0.010	-0.088	-0.218	-0.314	-0.431
	1024	-0.026	-0.005	-0.004	-0.098	-0.094	-0.101	-0.157	-0.177	-0.208	-0.290	-0.349	-0.418	-0.007	0.040	0.096	-0.060	-0.029	0.004	-0.118	-0.117	-0.123	-0.270	-0.306	-0.388	0.094	0.197	0.264	0.032	0.120	0.144	-0.027	0.003	-0.048	-0.192	-0.267	-0.399
	4096	-0.012	-0.004	-0.001	-0.070	-0.075	-0.085	-0.101	-0.129	-0.177	-0.294	-0.392	-0.461	0.002	0.019	0.064	-0.046	-0.037	-0.013	-0.081	-0.091	-0.113	-0.186	-0.278	-0.371	0.026	0.116	0.210	0.001	0.066	0.125	-0.032	-0.009	-0.024	-0.157	-0.239	-0.364
d_{tr}	256	0.533	0.703	0.561	0.599	0.459	0.341	0.362	0.275	0.195	0.216	0.144	0.053	0.784	0.616	0.481	0.532	0.395	0.331	0.334	0.265	0.195	0.198	0.140	0.081	0.684	0.545	0.494	0.450	0.384	0.367	0.300	0.271	0.253	0.210	0.176	0.128
	512	0.550	0.682	0.505	0.585	0.452	0.309	0.361	0.257	0.158	0.197	0.141	0.042	0.780	0.613	0.447	0.529	0.395	0.290	0.321	0.245	0.157	0.192	0.132	0.084	0.670	0.521	0.449	0.449	0.359	0.308	0.300	0.234	0.209	0.172	0.162	0.096
	1024	0.542	0.656	0.473	0.563	0.416	0.284	0.322	0.240	0.130	0.190	0.113	0.024	0.807	0.597	0.416	0.516	0.364	0.250	0.312	0.205	0.125	0.188	0.104	0.029	0.685	0.503	0.404	0.448	0.329	0.270	0.268	0.209	0.174	0.178	0.129	0.072
	4096	0.588	0.592	0.402	0.540	0.355	0.211	0.294	0.178	0.080	0.154	0.085	-0.015	0.775	0.548	0.358	0.484	0.322	0.188	0.270	0.161	0.071	0.152	0.079	-0.011	0.692	0.458	0.316	0.423	0.258	0.188	0.242	0.147	0.104	0.147	0.084	0.013
d_{tr}	256	0.291	0.149	0.051	0.111	0.017	-0.057	0.014	-0.091	-0.182	-0.104	-0.239	-0.343	0.263	0.180	0.188	0.142	0.088	0.074	0.040	-0.021	-0.084	-0.073	-0.177	-0.299	0.338	0.349	0.350	0.247	0.260	0.185	0.134	0.093	-0.038	-0.019	-0.133	-0.312
	512	0.256	0.115	0.046	0.106	0.002	-0.064	0.000	-0.100	-0.187	-0.096	-0.225	-0.362	0.258	0.145	0.161	0.109	0.058	0.053	0.027	-0.043	-0.098	-0.089	-0.204	-0.321	0.254	0.188	0.197	0.188	0.216	0.191	0.106	0.074	-0.034	-0.018	-0.135	-0.324
	1024	0.253	0.096	0.029	0.095	-0.018	-0.073	-0.004	-0.104	-0.184	-0.096	-0.238	-0.367	0.220	0.113	0.129	0.091	0.028	0.034	0.014	-0.059	-0.103	-0.085	-0.210	-0.336	0.217	0.253	0.325	0.132	0.173	0.191	0.071	0.061	-0.019	-0.033	-0.149	-0.322
	4096	0.246	0.063	0.017	0.080	-0.030	-0.075	-0.005	-0.099	-0.176	-0.080	-0.236	-0.378	0.197	0.070	0.086	0.064	-0.004	0.006	0.000	-0.063	-0.109	-0.075	-0.218	-0.350	0.151	0.153	0.272	0.072	0.097	0.175	0.028	0.019	-0.009	-0.058	-0.173	-0.335
d_{tr}	256	0.070	0.063	0.039	-0.049	-0.041	-0.052	-0.101	-0.121	-0.153	-0.273	-0.256	-0.308	0.036	0.161	0.202	0.106	0.093	0.101	-0.018	-0.012	-0.037	-0.101	-0.180	-0.227	0.466	0.381	0.365	0.341	0.268	0.290	0.107	0.098	0.032	-0.099	-0.162	-0.230
	512	0.136	0.074	0.030	-0.006	-0.024	-0.062	-0.086	-0.109	-0.149	-0.176	-0.209	-0.294	0.132	0.143	0.165	0.017	0.055	0.075	-0.066	-0.019	-0.045	-0.209	-0.171	-0.233	0.337	0.327	0.343	0.309	0.237	0.217	0.149	0.099	0.040	-0.020	-0.100	-0.221
	1024	0.031	0.037	0.049	0.006	-0.020	-0.060	-0.060	-0.082	-0.135	-0.192	-0.160	-0.272	-0.005	0.109	0.138	0.012	0.039	0.058	-0.026	-0.027	-0.048	-0.212	-0.125	-0.236	0.227	0.261	0.309	0.161	0.187	0.197	0.092	0.100	0.042	-0.055	-0.071	-0.197
	4096	0.078	0.043	0.018	-0.044	-0.025	-0.055	-0.049	-0.043	-0.123	-0.096	-0.120	-0.208	0.001	0.060	0.089	-0.028	0.011	0.018	-0.035	-0.014	-0.006	-0.059	-0.106	-0.239	0.083	0.164	0.235	0.039	0.108	0.130	0.045	0.057	0.021	-0.041	-0.072	-0.211
d_{tr}	256	0.668	0.561	0.455	0.438	0.340	0.252	0.238	0.167	0.111	0.096	0.039	-0.036	0.610	0.495	0.416	0.392	0.301	0.265	0.217	0.172	0.129	0.087	0.045	-0.004	0.543	0.474	0.452	0.350	0.330	0.320	0.212	0.203	0.187	0.114	0.094	0.039
	512	0.689	0.553	0.432	0.443	0.344	0.244	0.247	0.167	0.095	0.104	0.050	-0.031	0.628	0.507	0.397	0.405	0.308	0.244	0.217	0.168	0.104	0.105	0.047	-0.022	0.542	0.465	0.424	0.355	0.308	0.282	0.218	0.180	0.162	0.101	0.085	0.016
	1024	0.699	0.548	0.425	0.446	0.330	0.234	0.237	0.167	0.080	0.110	0.036	-0.041	0.659	0.506	0.391	0.406	0.295	0.233	0.226	0.142	0.088	0.106	0.038	-0.033	0.564	0.452	0.400	0.355	0.281	0.257	0.201	0.165	0.137	0.114	0.069	0.003
	4096	0.719	0.528	0.404	0.444	0.307	0.207	0.223	0.133	0.055	0.100	0.028	-0.063	0.662	0.495	0.376	0.398	0.282	0.194	0.209	0.124	0.054	0.099	0.025	-0.057	0.587	0.458	0.356	0.349	0.243	0.207	0.187	0.122	0.091	0.096	0.035	-0.036
d_{tr}	256	0.595	0.579	0.561	0.595	0.579	0.561	0.558	0.332	0.331	0.180	0.172	0.147	0.547	0.483	0.447	0.547	0.483	0.447	0.334	0.298	0.270	0.176	0.148	0.156	0.485	0.422	0.412	0.485	0.422	0.412	0.315	0.285	0.295	0.193	0.178	0.201
	512	0.608	0.594	0.568	0.571	0.536	0.506	0.371	0.336	0.306	0.184	0.175	0.171	0.571	0.512	0.430	0.571	0.512	0.430	0.330	0.292	0.237	0.181	0.157	0.141	0.489	0.398	0.349	0.489	0.398	0.349	0.309	0.248	0.252	0.168	0.167	0.181
	1024	0.609	0.597	0.563	0.548	0.507	0.563	0.348	0.323	0.275	0.184	0.159	0.149	0.574	0.518	0.406	0.574	0.518	0.406	0.328	0.262	0.207	0.174	0.143	0.135	0.500	0.377	0.314	0.500	0.377	0.314	0.282	0.224	0.208	0.171	0.149	0.160
	4096	0.580	0.563	0.515	0.319	0.263	0.216	0.155	0.136	0.118	0.545	0.515	0.388	0.299	0.227	0.158	0.151	0.123	0.102																		

		$\phi = 0.0$						$\phi = 0.3$						$\phi = 0.6$											
		0.0	0.2	0.4	0.6	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79			
d_{LW}	256	0.526	0.418	0.333	0.337	0.246	0.173	0.205	0.136	0.099	0.148	0.137	0.187	0.490	0.401	0.354	0.328	0.253	0.214	0.201	0.143	0.100	0.140	0.122	0.157
	512	0.526	0.418	0.319	0.335	0.243	0.165	0.188	0.119	0.084	0.116	0.117	0.174	0.493	0.400	0.333	0.318	0.243	0.193	0.190	0.126	0.079	0.110	0.110	0.158
	1024	0.534	0.406	0.312	0.327	0.230	0.154	0.175	0.107	0.070	0.101	0.110	0.173	0.508	0.391	0.322	0.307	0.222	0.176	0.176	0.102	0.065	0.098	0.098	0.159
4096	4096	0.553	0.397	0.306	0.324	0.214	0.138	0.158	0.081	0.059	0.076	0.095	0.178	0.508	0.378	0.324	0.293	0.205	0.148	0.152	0.082	0.068	0.074	0.089	0.167
d_{MP}	256	0.560	0.427	0.330	0.374	0.263	0.185	0.245	0.162	0.116	0.175	0.148	0.177	0.523	0.414	0.359	0.363	0.275	0.235	0.243	0.175	0.124	0.178	0.136	0.151
	512	0.541	0.398	0.286	0.354	0.246	0.152	0.215	0.133	0.090	0.140	0.124	0.182	0.505	0.389	0.317	0.335	0.248	0.193	0.215	0.139	0.088	0.130	0.118	0.150
	1024	0.539	0.372	0.255	0.335	0.213	0.126	0.193	0.109	0.075	0.124	0.118	0.187	0.505	0.357	0.280	0.314	0.211	0.160	0.194	0.107	0.068	0.117	0.107	0.171
4096	4096	0.528	0.323	0.205	0.305	0.167	0.080	0.157	0.069	0.072	0.088	0.110	0.210	0.479	0.304	0.220	0.275	0.165	0.103	0.150	0.072	0.048	0.084	0.102	0.194
d_{HP}	256	0.349	0.238	0.147	0.372	0.255	0.184	0.425	0.332	0.302	0.544	0.505	0.490	0.320	0.210	0.178	0.343	0.191	0.131	0.377	0.281	0.225	0.408	0.455	0.472
	512	0.299	0.172	0.090	0.303	0.201	0.141	0.366	0.277	0.253	0.485	0.453	0.460	0.278	0.159	0.142	0.282	0.154	0.080	0.307	0.293	0.168	0.469	0.422	0.420
	1024	0.250	0.116	0.066	0.264	0.149	0.119	0.288	0.217	0.218	0.417	0.384	0.430	0.230	0.116	0.111	0.218	0.103	0.053	0.254	0.161	0.140	0.402	0.348	0.401
4096	4096	0.163	0.063	0.032	0.157	0.095	0.091	0.168	0.142	0.180	0.266	0.316	0.405	0.146	0.060	0.071	0.131	0.064	0.030	0.149	0.107	0.117	0.253	0.294	0.376
d_{SM}	256	0.920	0.749	0.596	0.687	0.524	0.396	0.495	0.371	0.270	0.493	0.275	0.195	0.854	0.665	0.523	0.639	0.466	0.380	0.484	0.359	0.269	0.384	0.274	0.197
	512	0.888	0.713	0.537	0.639	0.497	0.351	0.443	0.322	0.219	0.423	0.228	0.143	0.826	0.650	0.478	0.599	0.449	0.331	0.409	0.309	0.213	0.322	0.226	0.145
	1024	0.870	0.679	0.495	0.603	0.451	0.315	0.392	0.288	0.175	0.281	0.185	0.112	0.835	0.625	0.440	0.560	0.401	0.282	0.374	0.257	0.172	0.272	0.180	0.109
4096	4096	0.852	0.610	0.420	0.563	0.379	0.235	0.331	0.209	0.114	0.133	0.247	0.382	0.794	0.566	0.374	0.511	0.348	0.211	0.311	0.193	0.104	0.202	0.125	0.073
d_{AC}	256	0.399	0.253	0.157	0.298	0.198	0.162	0.255	0.210	0.233	0.270	0.305	0.377	0.380	0.262	0.238	0.291	0.207	0.163	0.242	0.190	0.170	0.246	0.260	0.335
	512	0.345	0.193	0.114	0.241	0.149	0.125	0.211	0.176	0.214	0.221	0.268	0.379	0.323	0.212	0.192	0.240	0.162	0.119	0.213	0.148	0.145	0.215	0.249	0.341
	1024	0.318	0.157	0.084	0.203	0.118	0.109	0.166	0.156	0.200	0.187	0.264	0.376	0.291	0.164	0.150	0.195	0.114	0.083	0.170	0.122	0.130	0.186	0.239	0.347
4096	4096	0.287	0.098	0.047	0.147	0.075	0.086	0.107	0.118	0.181	0.133	0.247	0.382	0.242	0.100	0.097	0.132	0.065	0.043	0.104	0.090	0.118	0.128	0.230	0.355
d_{MCP}	256	1.650	0.445	0.249	1.693	0.417	0.227	1.701	0.436	0.277	1.723	0.628	0.675	1.670	0.435	0.278	1.687	0.399	0.247	1.773	0.382	0.204	1.747	0.452	0.326
	512	1.280	0.315	0.202	1.226	0.302	0.173	1.200	0.301	0.223	1.264	0.367	0.419	1.225	0.312	0.214	1.265	0.283	0.152	1.296	0.258	0.145	1.272	0.324	0.298
	1024	1.227	0.301	0.937	0.887	0.252	0.134	0.865	0.218	0.174	0.893	0.253	0.301	2.105	0.233	0.169	0.826	0.185	0.110	0.850	0.170	0.106	0.898	0.218	0.298
4096	4096	0.488	0.147	0.062	0.442	0.136	0.076	0.427	0.112	0.134	0.439	0.153	0.278	0.460	0.178	0.102	0.428	0.113	0.051	0.420	0.089	0.081	0.436	0.137	0.250
d_{LWN}	256	0.711	0.594	0.481	0.496	0.387	0.293	0.333	0.246	0.179	0.250	0.166	0.140	0.658	0.529	0.445	0.462	0.351	0.299	0.316	0.244	0.187	0.241	0.166	0.126
	512	0.715	0.575	0.454	0.482	0.378	0.277	0.307	0.219	0.148	0.202	0.137	0.103	0.659	0.533	0.419	0.451	0.346	0.272	0.283	0.216	0.150	0.200	0.137	0.101
	1024	0.720	0.564	0.440	0.474	0.357	0.258	0.281	0.205	0.123	0.178	0.113	0.093	0.680	0.525	0.408	0.436	0.322	0.246	0.271	0.182	0.124	0.176	0.108	0.084
4096	4096	0.730	0.540	0.416	0.462	0.324	0.225	0.251	0.158	0.089	0.139	0.079	0.085	0.677	0.507	0.387	0.418	0.300	0.210	0.238	0.150	0.083	0.138	0.076	0.080
d_{LWN}	256	0.635	0.622	0.606	0.635	0.622	0.606	0.621	0.398	0.388	0.266	0.256	0.246	0.598	0.537	0.496	0.598	0.537	0.496	0.399	0.364	0.331	0.237	0.237	0.232
	512	0.639	0.625	0.601	0.619	0.384	0.353	0.253	0.237	0.226	0.231	0.237	0.226	0.611	0.556	0.471	0.384	0.343	0.287	0.370	0.305	0.243	0.231	0.197	0.177
	1024	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587	0.630	0.619	0.587
4096	4096	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529	0.589	0.574	0.529
d_{LWNH}	256	0.617	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578	0.607	0.589	0.578
	512	0.616	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583	0.605	0.598	0.583
	1024	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577	0.612	0.604	0.577
4096	4096	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528	0.593	0.572	0.528

Table 5.8: RMSE DGP4: ARFIMA (1,d,0) plus non-stationary RLS

d	T/δ	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$							
		0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79			
		0.60	0.70	0.79	0.86	0.70	0.79	0.79	0.86	0.70	0.79	0.79	0.86	0.70	0.79	0.79	0.86	0.70	0.79
d_{LW}	256	0.671	0.541	0.436	0.453	0.366	0.290	0.282	0.240	0.185	0.180	0.160	0.130	0.180	0.211	0.233	0.379	0.597	0.624
	512	0.710	0.560	0.442	0.483	0.374	0.288	0.304	0.233	0.175	0.195	0.153	0.121	0.202	0.195	0.213	0.285	0.577	0.583
	1024	0.641	0.559	0.439	0.473	0.361	0.273	0.288	0.218	0.158	0.180	0.146	0.107	0.176	0.172	0.186	0.267	0.516	0.533
	4096	0.709	0.533	0.406	0.442	0.319	0.231	0.240	0.168	0.113	0.144	0.107	0.071	0.145	0.118	0.127	0.344	0.443	0.440
d_{GPH}	256	0.557	0.481	0.405	0.365	0.330	0.282	0.241	0.220	0.178	0.162	0.167	0.155	0.171	0.211	0.235	0.387	0.477	0.549
	512	0.623	0.502	0.389	0.412	0.332	0.263	0.273	0.220	0.180	0.186	0.159	0.145	0.191	0.201	0.238	0.311	0.516	0.572
	1024	0.641	0.483	0.353	0.405	0.303	0.221	0.245	0.189	0.141	0.161	0.138	0.113	0.160	0.163	0.193	0.269	0.464	0.509
	4096	0.658	0.455	0.297	0.401	0.267	0.172	0.2318	0.147	0.096	0.140	0.104	0.075	0.143	0.118	0.135	0.304	0.262	0.330
d_{BP}	256	0.654	0.153	-0.030	0.423	0.159	-0.016	0.245	0.088	-0.092	0.132	0.085	-0.017	0.154	0.180	0.223	0.366	0.586	0.618
	512	0.198	-0.064	-0.030	0.106	-0.056	-0.037	0.127	-0.027	-0.047	0.105	0.017	-0.003	0.127	0.148	0.205	0.320	0.445	0.561
	1024	-0.070	-0.039	-0.014	-0.091	-0.042	-0.029	-0.033	-0.026	-0.031	0.027	0.034	-0.003	-0.026	0.065	0.152	0.285	0.247	0.197
	4096	-0.043	-0.009	-0.003	-0.044	-0.010	-0.008	-0.020	-0.012	-0.013	0.039	0.039	0.015	-0.020	0.028	0.101	0.309	0.227	0.147
d_{SR}	256	0.387	0.574	0.583	0.220	0.374	0.402	0.125	0.245	0.256	0.071	0.157	0.166	0.099	0.134	0.161	0.273	0.420	0.472
	512	0.644	0.715	0.630	0.408	0.462	0.414	0.254	0.296	0.273	0.147	0.198	0.195	0.135	0.182	0.164	0.316	0.493	0.474
	1024	0.842	0.762	0.617	0.535	0.482	0.392	0.320	0.287	0.295	0.190	0.186	0.162	0.181	0.161	0.136	0.254	0.524	0.442
	4096	0.889	0.756	0.561	0.602	0.469	0.332	0.331	0.256	0.184	0.191	0.156	0.125	0.189	0.150	0.109	0.256	0.537	0.373
d_{BCP}	256	0.680	0.286	0.155	0.460	0.186	0.092	0.310	0.127	0.072	0.204	0.104	0.058	0.223	0.178	0.232	0.399	0.543	0.661
	512	0.475	0.322	0.134	0.281	0.196	0.087	0.163	0.138	0.068	0.102	0.105	0.056	0.121	0.179	0.231	0.378	0.480	0.616
	1024	0.576	0.223	0.099	0.339	0.123	0.052	0.200	0.080	0.088	0.154	0.073	0.038	0.190	0.125	0.205	0.382	0.360	0.547
	4096	0.455	0.188	0.051	0.214	0.091	0.025	0.103	0.051	0.012	0.080	0.055	0.016	0.084	0.081	0.128	0.238	0.217	0.418
d_{BCP}	256	0.231	0.271	0.200	0.087	0.235	0.204	0.017	0.205	0.196	-0.034	0.216	0.183	0.007	0.343	0.389	0.425	0.714	0.700
	512	0.473	0.279	0.145	0.426	0.246	0.201	0.314	0.219	0.176	0.432	0.217	0.148	0.530	0.307	0.304	0.340	0.480	0.616
	1024	0.143	0.239	0.104	0.124	0.210	0.128	0.098	0.181	0.140	0.047	0.152	0.113	0.145	0.213	0.207	0.308	0.431	0.513
	4096	0.389	0.226	0.075	0.206	0.188	0.089	0.179	0.146	0.092	0.201	0.104	0.075	0.229	0.118	0.135	0.132	0.241	0.264
d_{LW}	256	0.790	0.727	0.618	0.528	0.487	0.422	0.294	0.310	0.266	0.163	0.184	0.182	0.143	0.181	0.199	0.548	0.560	0.573
	512	0.875	0.764	0.624	0.599	0.514	0.419	0.359	0.317	0.283	0.196	0.198	0.180	0.184	0.198	0.190	0.670	0.578	0.550
	1024	0.904	0.757	0.608	0.621	0.501	0.396	0.377	0.301	0.296	0.223	0.190	0.159	0.207	0.178	0.163	0.714	0.571	0.512
	4096	0.890	0.713	0.550	0.587	0.444	0.330	0.323	0.240	0.173	0.182	0.144	0.110	0.179	0.140	0.113	0.718	0.534	0.436
d_{LW}	256	0.571	0.576	0.582	0.361	0.364	0.335	0.233	0.224	0.215	0.233	0.224	0.215	0.225	0.244	0.255	0.485	0.519	0.557
	512	0.666	0.655	0.619	0.413	0.385	0.343	0.248	0.231	0.208	0.248	0.231	0.208	0.241	0.260	0.252	0.523	0.469	0.505
	1024	0.706	0.670	0.615	0.435	0.374	0.316	0.253	0.215	0.184	0.268	0.246	0.220	0.241	0.266	0.196	0.572	0.433	0.447
	4096	0.688	0.635	0.547	0.389	0.313	0.242	0.206	0.163	0.130	0.242	0.218	0.188	0.202	0.156	0.133	0.584	0.411	0.340
d_{LW}	256	0.551	0.532	0.535	0.354	0.342	0.309	0.231	0.218	0.205	0.236	0.218	0.205	0.226	0.244	0.255	0.485	0.519	0.559
	512	0.642	0.625	0.598	0.390	0.364	0.325	0.243	0.221	0.197	0.279	0.258	0.229	0.243	0.262	0.288	0.508	0.467	0.505
	1024	0.681	0.654	0.607	0.416	0.362	0.310	0.244	0.208	0.177	0.381	0.311	0.251	0.233	0.253	0.196	0.584	0.431	0.447
	4096	0.683	0.631	0.547	0.377	0.309	0.241	0.201	0.160	0.127	0.353	0.268	0.214	0.198	0.148	0.134	0.577	0.411	0.340

Table 5.9: Bias DGP5: ARFIMA (1,d,0) plus deterministic level shift

d	T/δ	$\phi = 0.0$								$\phi = 0.3$								$\phi = 0.6$							
		0.0		0.2		0.4		0.6		0.0		0.2		0.4		0.6		0.0		0.2		0.4		0.6	
		0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79
d_{1W}	256	0.675	0.543	0.437	0.461	0.371	0.294	0.300	0.251	0.193	0.211	0.182	0.145	0.602	0.525	0.480	0.420	0.382	0.379	0.301	0.289	0.300	0.220	0.227	0.241
	512	0.712	0.561	0.442	0.486	0.375	0.290	0.312	0.238	0.179	0.212	0.166	0.131	0.635	0.525	0.471	0.436	0.364	0.345	0.295	0.284	0.264	0.219	0.204	0.218
	1024	0.717	0.560	0.439	0.474	0.362	0.273	0.292	0.221	0.161	0.192	0.154	0.115	0.639	0.510	0.440	0.431	0.341	0.310	0.270	0.227	0.227	0.188	0.180	0.190
	4096	0.710	0.533	0.406	0.443	0.320	0.232	0.242	0.169	0.114	0.152	0.113	0.075	0.632	0.476	0.395	0.390	0.286	0.242	0.200	0.165	0.157	0.152	0.123	0.129
d_{2W}	256	0.567	0.488	0.409	0.388	0.342	0.290	0.275	0.249	0.214	0.215	0.198	0.178	0.511	0.483	0.470	0.372	0.362	0.382	0.286	0.290	0.322	0.221	0.236	0.270
	512	0.627	0.504	0.392	0.422	0.338	0.268	0.291	0.231	0.187	0.216	0.180	0.150	0.557	0.473	0.430	0.383	0.335	0.335	0.276	0.260	0.278	0.222	0.217	0.243
	1024	0.614	0.484	0.355	0.411	0.307	0.224	0.257	0.198	0.147	0.184	0.151	0.124	0.566	0.440	0.385	0.364	0.295	0.282	0.244	0.238	0.226	0.183	0.176	0.199
	4096	0.659	0.456	0.298	0.403	0.268	0.173	0.223	0.151	0.099	0.152	0.113	0.080	0.577	0.393	0.301	0.350	0.238	0.205	0.205	0.152	0.149	0.155	0.125	0.139
d_{3W}	256	0.674	0.458	0.207	0.470	0.393	0.241	0.333	0.339	0.252	0.292	0.285	0.291	0.601	0.485	0.407	0.430	0.377	0.354	0.326	0.309	0.296	0.279	0.269	0.248
	512	0.560	0.220	0.119	0.480	0.241	0.123	0.385	0.276	0.148	0.314	0.276	0.199	0.444	0.226	0.251	0.422	0.266	0.247	0.366	0.252	0.238	0.297	0.233	0.216
	1024	0.352	0.162	0.083	0.337	0.153	0.077	0.329	0.155	0.084	0.331	0.193	0.141	0.268	0.141	0.192	0.285	0.134	0.176	0.293	0.151	0.188	0.308	0.190	0.186
	4096	0.223	0.081	0.038	0.169	0.064	0.034	0.153	0.062	0.035	0.195	0.103	0.065	0.172	0.076	0.117	0.141	0.064	0.105	0.140	0.065	0.101	0.179	0.111	0.124
d_{5W}	256	0.471	0.602	0.596	0.372	0.419	0.423	0.331	0.323	0.293	0.301	0.254	0.225	0.456	0.536	0.491	0.374	0.372	0.351	0.323	0.279	0.270	0.309	0.250	0.222
	512	0.662	0.721	0.635	0.454	0.479	0.423	0.326	0.328	0.290	0.292	0.243	0.221	0.636	0.618	0.523	0.428	0.414	0.350	0.323	0.301	0.296	0.293	0.239	0.198
	1024	0.848	0.765	0.619	0.553	0.490	0.397	0.356	0.304	0.246	0.258	0.216	0.182	0.772	0.666	0.513	0.499	0.417	0.323	0.327	0.270	0.211	0.213	0.198	0.160
	4096	0.891	0.757	0.562	0.606	0.472	0.333	0.343	0.263	0.188	0.218	0.171	0.134	0.848	0.663	0.461	0.552	0.403	0.270	0.324	0.234	0.153	0.216	0.165	0.120
d_{7W}	256	0.695	0.329	0.208	0.492	0.258	0.108	0.359	0.214	0.153	0.266	0.194	0.145	0.612	0.366	0.379	0.464	0.316	0.348	0.358	0.291	0.313	0.280	0.238	0.201
	512	0.499	0.342	0.165	0.332	0.233	0.133	0.241	0.195	0.114	0.196	0.170	0.114	0.420	0.341	0.322	0.305	0.269	0.288	0.244	0.237	0.264	0.205	0.220	0.251
	1024	0.587	0.244	0.124	0.362	0.160	0.091	0.242	0.129	0.082	0.204	0.127	0.087	0.469	0.229	0.250	0.308	0.188	0.228	0.239	0.163	0.218	0.204	0.171	0.214
	4096	0.460	0.196	0.066	0.229	0.110	0.048	0.137	0.078	0.045	0.122	0.084	0.047	0.342	0.160	0.151	0.186	0.109	0.139	0.127	0.097	0.133	0.125	0.103	0.136
d_{10W}	256	1.682	0.513	0.326	1.682	0.462	0.290	1.677	0.427	0.232	1.636	0.380	0.227	1.705	0.550	0.483	1.691	0.542	0.417	1.663	0.331	0.424	1.608	0.480	0.433
	512	1.318	0.424	0.233	1.298	0.351	0.249	1.234	0.301	0.189	1.264	0.275	0.164	1.263	0.441	0.402	1.264	0.373	0.339	1.282	0.300	0.297	1.268	0.371	0.335
	1024	0.895	0.375	0.158	1.576	0.284	0.161	0.853	0.208	0.148	0.860	0.181	0.124	0.885	0.303	0.284	0.835	0.281	0.279	0.884	0.225	0.226	0.856	0.259	0.221
	4096	0.623	0.283	0.097	0.494	0.210	0.098	0.547	0.151	0.097	0.437	0.112	0.080	0.536	0.193	0.174	0.457	0.169	0.163	0.424	0.152	0.149	0.435	0.125	0.139
d_{15W}	256	0.806	0.734	0.621	0.557	0.499	0.428	0.353	0.334	0.281	0.251	0.226	0.208	0.713	0.630	0.546	0.478	0.425	0.392	0.335	0.291	0.287	0.244	0.229	0.223
	512	0.880	0.766	0.625	0.608	0.519	0.421	0.377	0.328	0.269	0.237	0.219	0.193	0.806	0.667	0.550	0.537	0.451	0.375	0.346	0.300	0.261	0.231	0.220	0.203
	1024	0.906	0.758	0.609	0.625	0.503	0.397	0.386	0.306	0.240	0.245	0.202	0.168	0.827	0.668	0.534	0.560	0.438	0.352	0.350	0.275	0.228	0.232	0.193	0.172
	4096	0.890	0.713	0.550	0.588	0.445	0.330	0.327	0.242	0.175	0.195	0.152	0.115	0.821	0.630	0.482	0.527	0.385	0.286	0.300	0.217	0.160	0.192	0.148	0.118
d_{20W}	256	0.586	0.592	0.596	0.674	0.663	0.626	0.427	0.400	0.353	0.266	0.247	0.222	0.522	0.496	0.450	0.375	0.347	0.335	0.255	0.261	0.264	0.255	0.261	0.264
	512	0.649	0.635	0.606	0.711	0.675	0.619	0.446	0.382	0.322	0.268	0.227	0.194	0.618	0.560	0.489	0.408	0.347	0.295	0.264	0.248	0.236	0.260	0.244	0.245
	1024	0.711	0.675	0.619	0.689	0.637	0.548	0.394	0.316	0.244	0.218	0.171	0.136	0.675	0.583	0.483	0.411	0.326	0.256	0.237	0.216	0.200	0.257	0.216	0.200
	4096	0.689	0.637	0.548	0.565	0.545	0.506	0.374	0.359	0.326	0.258	0.239	0.224	0.645	0.569	0.487	0.370	0.275	0.183	0.213	0.163	0.136	0.213	0.163	0.136
d_{25W}	256	0.649	0.635	0.606	0.711	0.675	0.619	0.446	0.382	0.322	0.268	0.227	0.194	0.505	0.475	0.441	0.368	0.341	0.331	0.255	0.260	0.264	0.260	0.244	0.245
	512	0.686	0.659	0.611	0.426	0.370	0.316	0.258	0.219	0.187	0.648	0.574	0.482	0.393	0.319	0.254	0.247	0.213	0.200	0.308	0.319	0.254	0.247	0.213	0.200
	1024	0.684	0.633	0.548	0.382	0.313	0.243	0.212	0.167	0.133	0.642	0.568	0.397	0.360	0.273	0.182	0.208	0.161	0.135	0.390	0.273	0.182	0.208	0.161	0.135
	4096	0.684	0.633	0.548	0.382	0.313	0.243	0.212	0.167	0.133	0.390	0.273	0.182	0.208	0.161	0.135	0.390	0.273	0.182	0.208	0.161	0.135	0.390	0.273	0.182

Table 5.10: RMSE DGP5: ARFIMA (1,d,0) plus deterministic level shift

d	T, δ	$\phi = 0.0$												$\phi = 0.3$												$\phi = 0.6$												$\phi = 0.6$																																															
		0.0				0.2				0.4				0.6				0.0				0.2				0.4				0.6				0.0				0.2				0.4				0.6																																							
		0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80	0.60	0.70	0.79	0.80																																												
d_{LW}	256	-0.013	-0.009	-0.010	-0.007	-0.011	-0.017	-0.008	-0.007	-0.020	-0.006	-0.006	-0.020	0.025	0.080	0.156	0.023	0.082	0.144	0.030	0.076	0.143	0.043	0.082	0.134	0.156	0.295	0.427	0.155	0.297	0.416	0.169	0.295	0.405	0.167	0.284	0.367	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069
	512	-0.007	-0.005	-0.001	-0.010	-0.004	-0.010	-0.005	-0.004	-0.012	-0.010	0.001	-0.013	-0.010	0.007	0.059	0.102	0.008	0.036	0.097	0.012	0.037	0.097	0.019	0.043	0.095	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069											
	1024	-0.004	-0.004	-0.004	-0.002	-0.004	-0.008	-0.002	-0.003	-0.006	-0.002	0.004	-0.009	-0.009	-0.007	0.039	0.102	0.008	0.036	0.097	0.012	0.037	0.097	0.019	0.043	0.095	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069																							
4096	-0.002	0.000	0.000	-0.001	-0.003	-0.003	-0.001	0.000	-0.004	-0.006	0.005	-0.003	-0.003	0.002	0.016	0.066	0.000	0.016	0.063	0.003	0.018	0.061	0.010	0.022	0.063	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069	0.008	0.077	0.179	0.002	0.029	0.069	0.002	0.029	0.069	0.002	0.029	0.069																								
d_M	256	-0.002	-0.005	-0.006	0.006	0.001	-0.005	0.007	0.006	0.001	0.011	0.013	0.011	0.028	0.086	0.155	0.028	0.092	0.153	0.046	0.087	0.157	0.056	0.096	0.162	0.028	0.086	0.155	0.028	0.092	0.153	0.046	0.087	0.157	0.056	0.096	0.162	0.028	0.086	0.155	0.028	0.092	0.153	0.046	0.087	0.157	0.056	0.096	0.162	0.028	0.086	0.155	0.028	0.092	0.153	0.046	0.087	0.157	0.056	0.096	0.162																								
	512	0.004	0.002	0.002	-0.002	0.002	-0.001	0.003	0.000	-0.003	0.005	0.008	0.012	0.006	0.020	0.060	0.126	0.020	0.055	0.128	0.029	0.069	0.128	0.030	0.070	0.134	0.020	0.060	0.126	0.020	0.055	0.128	0.029	0.069	0.128	0.030	0.070	0.134	0.020	0.060	0.126	0.020	0.055	0.128	0.029	0.069	0.128	0.030	0.070	0.134																																			
	1024	0.001	0.000	-0.001	0.003	0.000	-0.003	0.005	0.003	0.005	0.008	0.012	0.006	0.014	0.041	0.100	0.013	0.041	0.100	0.020	0.042	0.105	0.027	0.048	0.106	0.014	0.041	0.100	0.013	0.041	0.100	0.020	0.042	0.105	0.027	0.048	0.106																																																
4096	-0.001	0.000	0.000	0.002	0.000	0.000	0.002	0.003	0.001	0.011	0.008	0.004	0.005	0.018	0.065	0.004	0.018	0.064	0.003	0.021	0.066	0.014	0.025	0.069	0.005	0.018	0.065	0.004	0.018	0.064	0.003	0.021	0.066	0.014	0.025	0.069																																																	
d_{MP}	256	-0.064	-0.040	-0.028	-0.078	-0.048	-0.043	-0.110	-0.060	-0.062	-0.153	-0.106	-0.104	-0.019	0.066	0.152	-0.035	0.064	0.141	-0.036	0.053	0.135	-0.066	0.035	0.117	0.136	0.292	0.428	0.135	0.296	0.416	0.131	0.291	0.405	0.107	0.279	0.362																																																
	512	-0.041	-0.027	-0.014	-0.053	-0.027	-0.026	-0.061	-0.039	-0.034	-0.103	-0.067	-0.062	-0.014	0.047	0.125	-0.026	0.038	0.121	-0.026	0.042	0.114	-0.073	0.032	0.111	0.084	0.226	0.378	0.084	0.228	0.373	0.074	0.228	0.364	0.067	0.224	0.314																																																
	1024	-0.028	-0.016	-0.010	-0.028	-0.021	-0.017	-0.042	-0.025	-0.020	-0.068	-0.039	-0.037	-0.013	0.032	0.101	-0.018	0.027	0.096	-0.024	0.025	0.096	-0.045	0.025	0.092	0.049	0.169	0.333	0.054	0.167	0.326	0.044	0.168	0.323	0.047	0.174	0.315																																																
4096	-0.013	-0.006	-0.003	-0.015	-0.010	-0.007	-0.020	-0.010	-0.010	-0.027	-0.013	-0.017	-0.008	0.013	0.065	-0.013	0.011	0.062	-0.015	0.012	0.061	-0.025	0.010	0.059	0.010	0.089	0.246	0.012	0.089	0.243	0.007	0.089	0.241	0.008	0.091	0.240																																																	
d_{MC}	256	-0.002	-0.004	-0.006	0.014	0.004	-0.008	0.002	0.012	0.007	0.010	0.013	0.019	-0.021	-0.014	0.001	-0.004	-0.002	-0.006	-0.005	-0.019	-0.003	-0.003	0.004	0.017	-0.055	0.011	0.103	-0.038	0.006	0.120	-0.022	0.028	0.124	0.002	0.041	0.128																																																
	512	0.009	0.004	0.007	-0.007	0.005	0.001	-0.007	0.010	0.004	0.028	0.016	0.015	-0.007	-0.013	-0.004	-0.008	-0.014	-0.008	-0.006	-0.003	0.001	-0.007	0.006	0.008	-0.036	-0.004	0.073	-0.016	-0.013	0.078	-0.007	0.006	0.073	0.007	0.009	0.084																																																
	1024	0.007	-0.001	-0.004	0.002	0.004	-0.004	0.003	0.003	0.006	0.013	0.019	0.010	0.005	-0.009	-0.015	-0.001	-0.004	-0.009	0.004	0.000	-0.006	0.010	0.003	-0.002	-0.015	-0.016	0.045	-0.013	-0.021	0.042	-0.019	-0.009	0.043	0.007	0.001	0.051																																																
4096	0.004	0.003	-0.001	0.005	0.003	0.001	0.001	0.004	0.003	0.011	0.014	0.007	-0.003	-0.006	-0.012	0.003	-0.001	-0.010	-0.004	-0.003	-0.010	0.014	0.008	-0.003	-0.012	-0.020	0.004	-0.003	-0.016	0.004	-0.006	-0.012	0.007	0.012	0.000	0.016																																																	
d_{MC}	256	-0.011	-0.014	-0.021	-0.009	-0.007	-0.025	-0.021	-0.015	-0.030	-0.011	-0.019	-0.038	0.049	0.127	0.266	0.034	0.131	0.243	0.055	0.127	0.238	0.058	0.116	0.200	0.243	0.448	0.619	0.245	0.447	0.599	0.249	0.420	0.537	0.212	0.339	0.391																																																
	512	-0.016	-0.010	-0.006	-0.015	-0.007	-0.016	-0.006	-0.012	-0.018	0.002	-0.012	-0.034	0.025	0.095	0.220	0.023	0.090	0.213	0.039	0.091	0.197	0.026	0.087	0.187	0.139	0.363	0.569	0.167	0.369	0.564	0.157	0.353	0.532	0.169	0.323	0.394																																																
	1024	0.000	-0.003	-0.002	-0.003	-0.010	-0.009	-0.008	-0.003	-0.013	-0.008	-0.003	-0.017	0.007	0.069	0.185	0.013	0.063	0.168	0.015	0.059	0.170	0.026	0.068	0.157	0.097	0.290	0.525	0.112	0.292	0.510	0.103	0.284	0.502	0.113	0.282	0.396																																																
4096	-0.002	-0.002	-0.001	-0.009	-0.006	-0.005	-0.002	-0.003	-0.008	-0.007	0.003	-0.011	0.008	0.031	0.119	0.004	0.024	0.114	0.007	0.031	0.109	0.007	0.031	0.106	0.035	0.160	0.410	0.038	0.158	0.404	0.035	0.155	0.399	0.040	0.155	0.380																																																	
d_{MC}	256	0.078	-0.089	0.000	-0.077	-0.063	-0.047	0.036	-0.049	-0.036	-0.002	0.056	0.015	0.183	0.114	0.208	0.083	0.148	0.194	0.099	0.207	0.239	0.166	0.305	0.321	0.575	0.482	0.515	0.416	0.614	0.635	0.546	0.691	0.727	0.482	0.681	0.728																																																
	512	-0.064	-0.046	-0.021	0.015	-0.058	-0.026	0.008	-0.029	-0.009	0.039	0.046	0.010	0.080	0.083	0.184	0.005	0.064	0.154	0.049	0.115	0.133	0.134	0.176	0.208	0.386	0.432	0.398	0.409	0.400	0.454	0.395	0.495	0.629	0.422	0.557	0.650																																																
	1024	-0.088	-0.017	-0.011	-0.043	-0.045	-0.014	-0.013	-0.011	0.001	0.057	0.025	0.006	0.022	0.089	0.159	0.015	0.045	0.125	0.044	0.045	0.108	0.122	0.086	0.118	0.289	0.232	0.362	0.162	0.215	0.319	0.229	0.285	0.479	0.343	0.419	0.584																																																
4096	-0.088	-0.019	-0.005	-0.238	-0.016	-0.003	-0.045	-0.001	0.000	-0.007	0.008	0.001	-0.040	0.029	0.106	-0.074	0.019	0.081	-0.025	0.021	0.069	0.081	0.026	0.069	0.002	0.151	0.286	-0.026	0.116	0.241	0.048	0.092	0.227	0.151	0.111	0.374																																																	
d_{RPW}	256	-0.046	-0.026	-0.021	-0.031	-0.022	-0.019	-0.036	-0.018	-0.009	-0.035	-0.008	0.001	-0.044	-0.069	0.037	-0.036	-0.003	0.030	-0.036	-0.010	0.034	-0.025	0.007	0.050	-0.019	0.086	0.210	-0.018	0.084	0.217	0.003	0.096	0.216	0.014	0.102	0.223																																																
	512	-0.026	-0.013	-0.004	-0.029	-0.011	-0.008	-0.031	-0.012	-0.005	-0.001	0.000	0.004	-0.027	-0.008	0.024	-0.031	-0.010	0.023	-0.022	0.000	0.028	-0.009	0.008	0.034	-0.016	0.053	0.167	-0.011	0.048	0.170	-0.003	0																																																				

d	T/δ	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$							
		0.0	0.2	0.4	0.6	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	
d_{EW}	256	0.123	0.086	0.066	0.116	0.084	0.064	0.118	0.086	0.067	0.125	0.088	0.070	0.121	0.114	0.168	0.125	0.119	0.149
	512	0.094	0.063	0.046	0.093	0.065	0.045	0.089	0.065	0.049	0.092	0.064	0.050	0.091	0.085	0.136	0.092	0.082	0.131
	1024	0.070	0.049	0.034	0.071	0.050	0.036	0.069	0.050	0.035	0.073	0.052	0.036	0.070	0.062	0.108	0.070	0.061	0.103
	4096	0.043	0.028	0.019	0.045	0.029	0.019	0.044	0.028	0.020	0.046	0.030	0.021	0.043	0.042	0.068	0.045	0.052	0.063
d_{EPT}	256	0.155	0.108	0.085	0.152	0.112	0.082	0.145	0.105	0.086	0.156	0.112	0.086	0.154	0.135	0.175	0.157	0.141	0.174
	512	0.114	0.084	0.060	0.115	0.081	0.057	0.107	0.081	0.061	0.116	0.085	0.064	0.117	0.100	0.140	0.119	0.097	0.140
	1024	0.089	0.062	0.045	0.092	0.062	0.045	0.089	0.063	0.045	0.094	0.065	0.045	0.092	0.071	0.110	0.089	0.073	0.109
	4096	0.054	0.035	0.025	0.055	0.036	0.024	0.057	0.037	0.025	0.059	0.039	0.026	0.056	0.040	0.069	0.055	0.041	0.069
d_{EP}	256	0.165	0.115	0.080	0.191	0.122	0.087	0.241	0.140	0.110	0.339	0.228	0.192	0.150	0.111	0.165	0.173	0.115	0.156
	512	0.120	0.081	0.054	0.132	0.082	0.057	0.153	0.101	0.070	0.251	0.155	0.107	0.107	0.084	0.135	0.129	0.082	0.130
	1024	0.086	0.057	0.038	0.092	0.061	0.042	0.110	0.067	0.047	0.172	0.102	0.066	0.082	0.061	0.107	0.092	0.060	0.102
	4096	0.050	0.030	0.020	0.053	0.033	0.021	0.058	0.033	0.024	0.084	0.041	0.029	0.049	0.032	0.068	0.053	0.032	0.065
d_{SM}	256	0.338	0.214	0.158	0.337	0.214	0.162	0.333	0.214	0.163	0.339	0.224	0.164	0.340	0.215	0.157	0.334	0.219	0.153
	512	0.235	0.160	0.105	0.231	0.159	0.111	0.229	0.162	0.118	0.243	0.166	0.114	0.239	0.159	0.113	0.234	0.161	0.114
	1024	0.180	0.119	0.083	0.181	0.123	0.083	0.183	0.121	0.083	0.175	0.122	0.083	0.178	0.115	0.085	0.183	0.112	0.082
	4096	0.108	0.066	0.046	0.107	0.069	0.044	0.111	0.070	0.047	0.111	0.071	0.048	0.103	0.066	0.045	0.108	0.066	0.045
d_{AC}	256	0.237	0.189	0.147	0.238	0.178	0.139	0.245	0.188	0.143	0.224	0.182	0.148	0.246	0.220	0.300	0.251	0.232	0.282
	512	0.191	0.139	0.101	0.190	0.133	0.099	0.193	0.133	0.106	0.189	0.137	0.106	0.188	0.170	0.244	0.194	0.161	0.235
	1024	0.152	0.106	0.078	0.158	0.107	0.076	0.154	0.103	0.075	0.152	0.104	0.079	0.153	0.126	0.201	0.159	0.123	0.184
	4096	0.091	0.061	0.042	0.097	0.061	0.043	0.093	0.059	0.044	0.093	0.060	0.043	0.095	0.067	0.126	0.093	0.067	0.122
d_{MCP}	256	1.666	0.473	0.814	1.674	0.397	0.170	1.716	0.413	0.162	1.685	0.361	0.143	1.606	0.373	0.244	1.623	0.395	0.244
	512	1.247	0.250	0.224	1.245	0.236	0.138	1.230	0.201	0.088	1.226	0.217	0.071	1.233	0.378	0.202	1.256	0.211	0.167
	1024	0.862	0.228	0.103	0.852	0.167	0.080	0.854	0.106	0.051	0.854	0.112	0.045	1.182	0.339	0.170	0.864	0.193	0.133
	4096	0.421	0.176	0.050	0.472	0.076	0.035	0.424	0.042	0.028	0.390	0.039	0.026	0.516	0.093	0.112	0.392	0.066	0.086
d_{PWP}	256	0.220	0.145	0.108	0.215	0.147	0.111	0.219	0.142	0.105	0.224	0.145	0.106	0.217	0.137	0.109	0.218	0.144	0.107
	512	0.154	0.104	0.071	0.159	0.104	0.073	0.153	0.106	0.076	0.158	0.104	0.074	0.153	0.105	0.079	0.155	0.106	0.078
	1024	0.115	0.080	0.055	0.112	0.081	0.055	0.120	0.080	0.054	0.117	0.079	0.056	0.120	0.077	0.055	0.118	0.078	0.056
	4096	0.072	0.043	0.030	0.070	0.045	0.028	0.070	0.044	0.030	0.073	0.046	0.032	0.066	0.043	0.030	0.071	0.044	0.030
d_{LWP}	256	0.303	0.260	0.217	0.303	0.260	0.217	0.256	0.185	0.138	0.192	0.145	0.118	0.217	0.137	0.109	0.215	0.142	0.119
	512	0.247	0.190	0.148	0.247	0.190	0.148	0.179	0.129	0.094	0.156	0.108	0.082	0.224	0.141	0.135	0.169	0.116	0.130
	1024	0.186	0.150	0.098	0.186	0.150	0.098	0.140	0.092	0.068	0.117	0.083	0.060	0.182	0.105	0.105	0.130	0.083	0.105
	4096	0.124	0.080	0.054	0.124	0.080	0.054	0.082	0.052	0.037	0.072	0.049	0.036	0.115	0.062	0.067	0.081	0.048	0.066
d_{LWPI}	256	0.279	0.229	0.191	0.279	0.229	0.191	0.235	0.172	0.120	0.181	0.137	0.105	0.268	0.185	0.168	0.209	0.150	0.166
	512	0.222	0.167	0.127	0.222	0.167	0.127	0.164	0.116	0.080	0.146	0.109	0.080	0.205	0.135	0.135	0.157	0.113	0.130
	1024	0.163	0.130	0.082	0.163	0.130	0.082	0.129	0.083	0.061	0.110	0.077	0.055	0.163	0.099	0.105	0.122	0.080	0.105
	4096	0.110	0.069	0.045	0.110	0.069	0.045	0.075	0.048	0.033	0.069	0.046	0.034	0.102	0.058	0.067	0.075	0.046	0.066

Table 5.12: RMSE DGP6: ARFIMA (1,d,0) plus GARCH(1,1)

		$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$					
		0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	-0.010	-0.006	-0.004	-0.002	-0.001	-0.005	0.014	0.030	-0.113	-0.110	-0.106	-0.202	-0.227	-0.247	-0.309	-0.383
	512	-0.011	-0.008	-0.003	-0.002	-0.001	-0.004	0.014	0.027	-0.112	-0.109	-0.107	-0.182	-0.211	-0.236	-0.276	-0.339
	1024	-0.005	0.000	-0.001	-0.001	-0.001	0.003	0.010	0.024	-0.106	-0.105	-0.105	-0.158	-0.196	-0.228	-0.248	-0.322
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.003	0.002	0.005	-0.133	-0.141	-0.145	-0.149	-0.155	-0.155	-0.155	-0.227	-0.250	-0.270	-0.311	-0.372	
	512	-0.006	-0.002	-0.001	-0.129	-0.137	-0.144	-0.150	-0.157	-0.164	-0.171	-0.179	-0.202	-0.242	-0.266	-0.285	
	1024	0.000	0.003	0.002	-0.122	-0.132	-0.141	-0.151	-0.159	-0.168	-0.177	-0.186	-0.210	-0.251	-0.277	-0.297	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	-0.064	-0.036	-0.022	-0.209	-0.186	-0.179	-0.333	-0.331	-0.335	-0.335	-0.503	-0.506	-0.533	-0.503	-0.506	
	512	-0.049	-0.028	-0.015	-0.185	-0.171	-0.165	-0.294	-0.303	-0.315	-0.315	-0.454	-0.498	-0.514	-0.454	-0.498	
	1024	-0.026	-0.012	-0.007	-0.162	-0.151	-0.155	-0.251	-0.273	-0.298	-0.298	-0.415	-0.459	-0.504	-0.415	-0.459	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.008	0.000	0.004	-0.106	-0.131	-0.133	-0.163	-0.187	-0.204	-0.204	-0.167	-0.238	-0.266	-0.167	-0.238	
	512	-0.006	-0.002	0.003	-0.107	-0.114	-0.128	-0.132	-0.169	-0.204	-0.204	-0.126	-0.208	-0.286	-0.126	-0.208	
	1024	0.003	0.002	0.003	-0.100	-0.112	-0.126	-0.110	-0.153	-0.190	-0.190	-0.095	-0.189	-0.271	-0.095	-0.189	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	-0.003	0.000	0.003	-0.088	-0.103	-0.113	-0.073	-0.117	-0.164	-0.164	-0.067	-0.158	-0.257	-0.067	-0.158	
	512	-0.009	0.001	-0.003	-0.162	-0.153	-0.169	-0.272	-0.318	-0.345	-0.345	-0.423	-0.478	-0.541	-0.423	-0.478	
	1024	-0.002	0.002	0.003	-0.138	-0.164	-0.167	-0.259	-0.308	-0.325	-0.325	-0.409	-0.476	-0.531	-0.409	-0.476	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.009	0.008	-0.008	-0.165	-0.238	-0.158	-0.402	-0.409	-0.380	-0.380	-0.560	-0.597	-0.548	-0.560	-0.597	
	512	-0.039	-0.059	-0.018	-0.107	-0.218	-0.179	-0.309	-0.348	-0.348	-0.522	-0.528	-0.438	-0.528	-0.438		
	1024	-0.063	-0.030	-0.015	-0.129	-0.176	-0.179	-0.346	-0.330	-0.336	-0.336	-0.511	-0.506	-0.539	-0.511		
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	-0.210	-0.014	-0.005	-0.227	-0.160	-0.154	-0.357	-0.283	-0.301	-0.301	-0.494	-0.472	-0.515	-0.494	-0.472	
	512	-0.035	-0.021	-0.011	-0.158	-0.158	-0.152	-0.228	-0.237	-0.250	-0.250	-0.271	-0.316	-0.356	-0.271	-0.316	
	1024	-0.018	-0.010	-0.003	-0.128	-0.125	-0.136	-0.153	-0.184	-0.216	-0.216	-0.174	-0.246	-0.314	-0.174	-0.246	
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.028	0.019	0.012	-0.015	-0.012	0.006	-0.015	-0.012	0.006	-0.015	-0.012	0.006	-0.015	-0.012	0.006	
	512	0.023	0.017	0.012	-0.008	0.006	0.012	-0.008	0.006	0.012	-0.008	0.006	0.012	-0.008	0.006		
	1024	0.016	0.013	0.003	-0.006	-0.011	-0.003	-0.006	-0.011	-0.003	-0.006	-0.011	-0.003	-0.006	-0.011		
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.039	0.008	-0.011	-0.040	-0.058	-0.044	-0.040	-0.058	-0.044	-0.040	-0.058	-0.044	-0.040	-0.058		
	512	0.023	0.007	-0.011	-0.039	-0.039	-0.044	-0.039	-0.039	-0.044	-0.039	-0.039	-0.044	-0.039			
	1024	0.005	-0.010	-0.024	-0.044	-0.055	-0.049	-0.044	-0.055	-0.049	-0.044	-0.055	-0.049	-0.044			
d_{RW}	\mathcal{T}/δ	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	0.0	0.2	0.4	0.6	0.79	
	256	0.002	-0.011	-0.025	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028		
	512	0.002	-0.011	-0.025	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028		
	1024	0.002	-0.011	-0.025	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028	-0.028	-0.024	-0.028		

Table 5.13: Bias DGP7: ARFIMA (1,d,0) plus ARMA(0,0)

d	T/δ	$\phi = 0.0$							$\phi = 0.3$							$\phi = 0.6$									
		0.0		0.2		0.4		0.6		0.0		0.2		0.4		0.6		0.0		0.2		0.4		0.6	
		0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79
d_{1W}	256	0.119	0.084	0.064	0.189	0.170	0.167	0.265	0.277	0.290	0.349	0.391	0.429	0.120	0.088	0.070	0.159	0.135	0.122	0.232	0.239	0.252	0.323	0.369	0.407
	512	0.091	0.064	0.046	0.166	0.156	0.156	0.234	0.254	0.274	0.304	0.359	0.409	0.092	0.065	0.055	0.144	0.126	0.116	0.201	0.218	0.239	0.285	0.342	0.395
	1024	0.074	0.047	0.034	0.147	0.142	0.148	0.201	0.231	0.260	0.269	0.335	0.391	0.074	0.050	0.041	0.126	0.115	0.110	0.172	0.200	0.220	0.254	0.324	0.381
	4096	0.045	0.028	0.019	0.123	0.126	0.136	0.150	0.194	0.235	0.269	0.298	0.374	0.045	0.030	0.026	0.100	0.100	0.102	0.133	0.170	0.210	0.252	0.320	0.383
d_{1PW}	256	0.150	0.106	0.084	0.203	0.178	0.169	0.270	0.270	0.281	0.342	0.384	0.425	0.132	0.112	0.090	0.173	0.144	0.124	0.234	0.237	0.246	0.316	0.363	0.401
	512	0.110	0.082	0.060	0.175	0.158	0.156	0.230	0.254	0.272	0.303	0.361	0.416	0.111	0.084	0.067	0.151	0.129	0.118	0.206	0.217	0.225	0.284	0.343	0.398
	1024	0.089	0.060	0.046	0.150	0.145	0.148	0.201	0.233	0.260	0.268	0.343	0.408	0.083	0.064	0.051	0.136	0.117	0.110	0.172	0.199	0.228	0.254	0.333	0.396
	4096	0.054	0.036	0.025	0.125	0.128	0.136	0.155	0.197	0.241	0.216	0.319	0.400	0.056	0.038	0.030	0.102	0.101	0.102	0.133	0.174	0.213	0.249	0.310	0.392
d_{1P}	256	0.167	0.108	0.076	0.267	0.214	0.195	0.377	0.353	0.347	0.457	0.528	0.544	0.161	0.100	0.072	0.242	0.177	0.147	0.358	0.318	0.308	0.330	0.409	0.492
	512	0.124	0.080	0.053	0.222	0.189	0.175	0.328	0.315	0.321	0.403	0.660	0.621	0.116	0.073	0.051	0.194	0.148	0.130	0.306	0.279	0.285	0.471	0.487	0.508
	1024	0.089	0.053	0.037	0.183	0.161	0.160	0.273	0.281	0.302	0.447	0.469	0.508	0.089	0.053	0.040	0.164	0.134	0.120	0.244	0.253	0.271	0.422	0.466	0.502
	4096	0.050	0.031	0.020	0.146	0.138	0.143	0.202	0.238	0.274	0.355	0.440	0.501	0.050	0.031	0.025	0.128	0.104	0.104	0.118	0.120	0.147	0.114	0.161	0.254
d_{1M}	256	0.340	0.221	0.157	0.336	0.255	0.203	0.370	0.281	0.255	0.371	0.312	0.327	0.339	0.219	0.161	0.331	0.231	0.176	0.350	0.259	0.227	0.327	0.291	0.306
	512	0.248	0.156	0.114	0.272	0.193	0.169	0.267	0.229	0.230	0.284	0.255	0.302	0.239	0.161	0.120	0.255	0.189	0.156	0.270	0.204	0.194	0.252	0.233	0.279
	1024	0.185	0.121	0.081	0.208	0.162	0.149	0.216	0.191	0.204	0.190	0.215	0.279	0.183	0.119	0.082	0.200	0.150	0.129	0.195	0.168	0.176	0.191	0.200	0.264
	4096	0.109	0.068	0.044	0.139	0.123	0.122	0.126	0.134	0.169	0.122	0.167	0.260	0.108	0.069	0.044	0.128	0.104	0.104	0.118	0.120	0.147	0.114	0.161	0.254
d_{1C}	256	0.229	0.182	0.137	0.279	0.238	0.217	0.362	0.362	0.373	0.489	0.514	0.559	0.235	0.182	0.151	0.296	0.213	0.180	0.338	0.328	0.324	0.466	0.499	0.540
	512	0.193	0.133	0.101	0.249	0.215	0.195	0.318	0.336	0.340	0.452	0.496	0.541	0.183	0.138	0.116	0.226	0.176	0.147	0.299	0.291	0.305	0.426	0.482	0.531
	1024	0.153	0.107	0.074	0.203	0.183	0.172	0.285	0.303	0.333	0.412	0.481	0.535	0.145	0.110	0.086	0.198	0.156	0.130	0.252	0.278	0.299	0.387	0.471	0.525
	4096	0.091	0.060	0.043	0.162	0.154	0.158	0.219	0.269	0.311	0.384	0.458	0.529	0.098	0.062	0.053	0.141	0.126	0.112	0.199	0.239	0.281	0.332	0.449	0.518
d_{1CP}	256	1.645	0.420	0.288	1.737	0.448	0.612	1.705	0.592	0.480	1.755	0.713	0.587	1.605	0.300	0.200	1.669	0.397	0.283	1.706	0.559	0.377	1.750	0.669	0.613
	512	1.280	0.282	0.197	1.279	0.343	0.296	1.323	0.446	0.373	1.313	0.602	0.578	1.220	0.335	0.132	1.492	0.291	0.182	1.250	0.429	0.327	1.324	0.583	0.566
	1024	0.858	0.493	0.114	2.254	0.248	0.211	0.911	0.375	0.349	1.005	0.594	0.550	0.818	1.721	0.101	0.874	0.378	0.142	0.907	0.559	0.312	1.024	0.565	0.540
	4096	4.031	0.103	0.047	0.468	0.185	0.160	0.546	0.298	0.305	0.657	0.485	0.518	0.402	0.092	0.054	0.432	0.150	0.119	0.517	0.266	0.267	0.622	0.464	0.505
d_{1WP}	256	0.223	0.141	0.103	0.268	0.213	0.183	0.307	0.274	0.268	0.343	0.341	0.366	0.220	0.144	0.104	0.249	0.183	0.147	0.280	0.241	0.232	0.309	0.313	0.341
	512	0.157	0.104	0.076	0.213	0.173	0.160	0.241	0.233	0.240	0.255	0.287	0.336	0.159	0.103	0.075	0.202	0.156	0.134	0.221	0.201	0.207	0.237	0.268	0.320
	1024	0.120	0.078	0.054	0.174	0.146	0.146	0.192	0.198	0.222	0.200	0.253	0.316	0.117	0.078	0.052	0.155	0.132	0.118	0.171	0.173	0.191	0.199	0.240	0.299
	4096	0.071	0.044	0.028	0.127	0.121	0.125	0.122	0.151	0.189	0.134	0.207	0.289	0.069	0.045	0.029	0.109	0.098	0.102	0.110	0.132	0.166	0.127	0.200	0.282
d_{1WPI}	256	0.264	0.258	0.251	0.234	0.227	0.221	0.287	0.288	0.287	0.288	0.277	0.269	0.264	0.258	0.251	0.277	0.258	0.246	0.278	0.271	0.265	0.268	0.270	0.257
	512	0.224	0.227	0.221	0.238	0.234	0.218	0.241	0.241	0.218	0.217	0.212	0.197	0.229	0.209	0.184	0.229	0.209	0.184	0.232	0.218	0.197	0.218	0.212	0.191
	1024	0.203	0.193	0.188	0.180	0.186	0.175	0.172	0.160	0.143	0.159	0.153	0.143	0.201	0.186	0.148	0.182	0.172	0.152	0.177	0.172	0.152	0.177	0.162	0.141
	4096	0.159	0.146	0.128	0.126	0.111	0.087	0.126	0.111	0.087	0.105	0.088	0.075	0.146	0.123	0.091	0.123	0.102	0.079	0.106	0.087	0.076	0.106	0.087	0.076
d_{1WPII}	256	0.258	0.240	0.229	0.223	0.220	0.273	0.270	0.273	0.282	0.287	0.286	0.286	0.222	0.213	0.207	0.223	0.229	0.221	0.228	0.218	0.199	0.215	0.217	0.212
	512	0.190	0.175	0.173	0.190	0.175	0.173	0.240	0.186	0.180	0.176	0.179	0.163	0.215	0.185	0.165	0.218	0.208	0.199	0.218	0.208	0.199	0.215	0.214	0.212
	1024	0.143	0.134	0.123	0.143	0.134	0.123	0.121	0.116	0.100	0.111	0.099	0.083	0.143	0.134	0.123	0.121	0.116	0.100	0.114	0.106	0.091	0.108	0.098	0.083
	4096	0.116	0.058	0.038	0.101	0.089	0.083	0.101	0.089	0.083	0.101	0.089	0.083	0.101	0.089	0.083	0.101	0.089	0.083	0.101	0.089	0.083	0.101	0.089	0.083

Table 5.14: RMSE DGP7: ARFIMA (1,d,0) plus ARMA(0,0)

		$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$															
		0.0	0.2	0.4	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7									
d_{IW}	256	0.121	0.093	0.102	0.169	0.131	0.077	0.220	0.207	0.162	0.280	0.300	0.280	0.147	0.173	0.251	0.114	0.094	0.131	0.126	0.099	0.063	0.208	0.238	0.224		
	512	0.091	0.065	0.074	0.141	0.120	0.079	0.188	0.191	0.175	0.242	0.288	0.295	0.108	0.136	0.213	0.088	0.066	0.094	0.111	0.092	0.072	0.192	0.223	0.219		
	1024	0.069	0.049	0.054	0.128	0.112	0.088	0.159	0.179	0.178	0.216	0.274	0.301	0.077	0.104	0.180	0.071	0.045	0.067	0.099	0.093	0.087	0.178	0.235	0.267		
	4096	0.045	0.028	0.029	0.101	0.102	0.094	0.119	0.152	0.178	0.165	0.247	0.306	0.046	0.030	0.049	0.050	0.029	0.030	0.056	0.049	0.066	0.079	0.096	0.099	0.145	0.222
d_{opt}	256	0.153	0.116	0.115	0.180	0.143	0.092	0.223	0.206	0.160	0.276	0.294	0.268	0.133	0.122	0.161	0.102	0.110	0.085	0.194	0.164	0.110	0.246	0.271	0.242		
	512	0.115	0.082	0.083	0.154	0.123	0.085	0.187	0.194	0.170	0.241	0.287	0.292	0.117	0.091	0.118	0.139	0.094	0.056	0.164	0.155	0.123	0.230	0.266	0.266		
	1024	0.090	0.064	0.061	0.138	0.118	0.088	0.157	0.177	0.176	0.215	0.280	0.306	0.093	0.068	0.092	0.110	0.086	0.049	0.139	0.150	0.133	0.202	0.256	0.290		
	4096	0.056	0.035	0.033	0.104	0.102	0.094	0.122	0.153	0.180	0.172	0.263	0.326	0.057	0.038	0.051	0.084	0.076	0.055	0.106	0.132	0.146	0.164	0.254	0.316		
d_{IP}	256	0.161	0.103	0.099	0.246	0.167	0.087	0.347	0.268	0.188	0.469	0.423	0.330	0.162	0.101	0.151	0.214	0.127	0.066	0.306	0.224	0.133	0.487	0.405	0.309		
	512	0.119	0.069	0.072	0.190	0.147	0.088	0.294	0.247	0.198	0.440	0.418	0.359	0.113	0.077	0.111	0.172	0.108	0.047	0.258	0.203	0.145	0.422	0.393	0.337		
	1024	0.089	0.053	0.053	0.165	0.129	0.095	0.234	0.228	0.202	0.391	0.402	0.382	0.085	0.056	0.085	0.134	0.099	0.045	0.213	0.194	0.156	0.397	0.386	0.362		
	4096	0.050	0.029	0.028	0.120	0.112	0.099	0.167	0.188	0.204	0.308	0.380	0.414	0.051	0.031	0.048	0.110	0.083	0.057	0.142	0.161	0.167	0.265	0.371	0.403		
d_{SM}	256	0.319	0.223	0.161	0.341	0.253	0.210	0.330	0.266	0.260	0.336	0.272	0.318	0.333	0.214	0.157	0.351	0.232	0.199	0.343	0.244	0.227	0.312	0.264	0.295		
	512	0.232	0.157	0.112	0.248	0.185	0.172	0.259	0.195	0.210	0.233	0.220	0.276	0.245	0.163	0.112	0.252	0.184	0.151	0.241	0.186	0.191	0.238	0.206	0.259		
	1024	0.183	0.122	0.078	0.216	0.156	0.140	0.190	0.157	0.188	0.186	0.173	0.247	0.180	0.117	0.087	0.181	0.135	0.124	0.180	0.147	0.157	0.181	0.172	0.238		
	4096	0.109	0.068	0.045	0.128	0.107	0.110	0.126	0.106	0.142	0.112	0.128	0.221	0.108	0.066	0.047	0.119	0.090	0.092	0.115	0.098	0.123	0.108	0.122	0.211		
d_{AC}	256	0.239	0.190	0.196	0.270	0.207	0.138	0.329	0.282	0.194	0.423	0.417	0.334	0.246	0.201	0.274	0.252	0.189	0.174	0.289	0.243	0.156	0.400	0.384	0.313		
	512	0.189	0.138	0.145	0.215	0.172	0.108	0.291	0.261	0.203	0.374	0.412	0.371	0.190	0.157	0.207	0.209	0.145	0.116	0.258	0.216	0.149	0.366	0.388	0.346		
	1024	0.149	0.108	0.107	0.192	0.147	0.096	0.245	0.249	0.212	0.345	0.412	0.400	0.156	0.114	0.159	0.174	0.126	0.077	0.221	0.217	0.165	0.325	0.383	0.378		
	4096	0.090	0.061	0.059	0.141	0.128	0.101	0.184	0.217	0.231	0.282	0.391	0.438	0.096	0.064	0.091	0.122	0.099	0.053	0.164	0.185	0.188	0.270	0.379	0.427		
d_{MC}	256	1.669	0.368	0.190	1.663	0.629	0.135	1.642	0.448	0.189	1.605	0.538	1.771	1.640	0.408	0.231	1.726	0.401	0.141	1.663	0.470	0.151	1.672	0.538	0.300		
	512	1.248	0.251	0.142	1.231	0.286	0.103	1.215	0.354	0.200	1.293	0.468	0.354	1.250	0.271	0.183	1.228	0.260	0.088	1.288	0.306	0.140	1.301	0.457	0.322		
	1024	0.873	0.196	0.107	0.881	0.205	0.097	0.919	0.297	0.205	0.993	0.463	0.379	1.227	0.168	0.146	0.822	0.665	0.061	0.901	0.251	0.153	0.957	1.438	0.355		
	4096	0.425	0.096	0.056	0.452	0.151	0.098	0.483	0.233	0.216	0.584	0.392	0.403	0.420	0.096	0.086	0.460	0.120	0.052	0.783	0.186	0.172	0.543	0.374	0.390		
d_{LPW}	256	0.211	0.149	0.108	0.256	0.195	0.169	0.268	0.244	0.234	0.282	0.278	0.319	0.220	0.144	0.101	0.242	0.167	0.140	0.256	0.210	0.202	0.259	0.265	0.293		
	512	0.154	0.104	0.073	0.191	0.155	0.142	0.214	0.190	0.204	0.212	0.239	0.289	0.160	0.106	0.073	0.178	0.142	0.113	0.193	0.170	0.175	0.200	0.220	0.269		
	1024	0.115	0.081	0.050	0.166	0.133	0.127	0.163	0.159	0.186	0.168	0.203	0.268	0.118	0.078	0.055	0.138	0.112	0.098	0.149	0.140	0.156	0.152	0.193	0.254		
	4096	0.071	0.043	0.029	0.107	0.102	0.106	0.107	0.119	0.155	0.106	0.163	0.245	0.072	0.042	0.029	0.094	0.080	0.081	0.094	0.104	0.132	0.100	0.155	0.236		
d_{LWP}	256	0.270	0.244	0.135	0.270	0.244	0.135	0.280	0.249	0.174	0.255	0.239	0.238	0.220	0.144	0.101	0.271	0.219	0.092	0.267	0.215	0.124	0.248	0.233	0.214		
	512	0.206	0.206	0.123	0.228	0.201	0.155	0.205	0.202	0.211	0.205	0.202	0.211	0.180	0.106	0.073	0.239	0.188	0.064	0.217	0.166	0.116	0.202	0.192	0.196		
	1024	0.208	0.177	0.107	0.178	0.156	0.140	0.162	0.151	0.165	0.198	0.159	0.052	0.198	0.159	0.052	0.169	0.141	0.114	0.158	0.149	0.161	0.158	0.149	0.161		
	4096	0.149	0.122	0.084	0.120	0.096	0.089	0.105	0.083	0.083	0.149	0.102	0.052	0.149	0.102	0.052	0.106	0.087	0.088	0.100	0.084	0.086	0.100	0.084	0.086		
d_{LPWL}	256	0.256	0.227	0.131	0.267	0.238	0.173	0.245	0.238	0.240	0.255	0.238	0.240	0.249	0.204	0.091	0.249	0.204	0.091	0.240	0.203	0.123	0.236	0.235	0.215		
	512	0.209	0.190	0.118	0.215	0.196	0.156	0.200	0.207	0.214	0.202	0.195	0.199	0.221	0.173	0.062	0.221	0.173	0.062	0.200	0.189	0.177	0.213	0.202	0.199		
	1024	0.187	0.164	0.106	0.174	0.151	0.142	0.157	0.158	0.169	0.169	0.158	0.169	0.177	0.150	0.052	0.177	0.150	0.052	0.161	0.137	0.115	0.151	0.156	0.165		
	4096	0.138	0.114	0.084	0.111	0.098	0.094	0.103	0.093	0.086	0.128	0.094	0.052	0.128	0.094	0.052	0.096	0.089	0.091	0.099	0.094	0.089	0.099	0.094	0.089		

Table 5.16: RMSE DGP8: ARFIMA (1,d,0) plus ARMA(0,1)

d	T/δ	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$													
		0.0	0.2	0.4	0.6	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79										
d_{dW}	256	0.237	0.179	0.129	0.044	-0.007	-0.049	-0.112	-0.171	-0.211	-0.264	-0.322	-0.380	0.219	0.178	0.151	0.047	0.007	-0.026	-0.103	-0.154	-0.194	-0.245	-0.315	-0.369
	512	0.263	0.198	0.149	0.075	0.013	-0.031	-0.076	-0.146	-0.198	-0.226	-0.302	-0.366	0.261	0.198	0.159	0.075	0.022	-0.016	-0.064	-0.127	-0.184	-0.215	-0.283	-0.347
	1024	0.304	0.221	0.157	0.112	0.033	-0.025	-0.054	-0.131	-0.188	-0.190	-0.283	-0.356	0.293	0.212	0.167	0.105	0.038	-0.009	-0.049	-0.120	-0.169	-0.183	-0.275	-0.347
	4096	0.353	0.247	0.175	0.150	0.058	-0.010	-0.014	-0.103	-0.174	-0.147	-0.256	-0.341	0.336	0.236	0.177	0.141	0.059	0.003	-0.013	-0.097	-0.162	-0.146	-0.251	-0.336
d_{dRW}	256	0.258	0.191	0.137	0.065	0.005	-0.041	-0.088	-0.161	-0.202	-0.243	-0.311	-0.370	0.237	0.189	0.157	0.072	0.015	-0.012	-0.087	-0.138	-0.183	-0.224	-0.301	-0.360
	512	0.273	0.197	0.142	0.084	0.016	-0.033	-0.063	-0.141	-0.197	-0.216	-0.301	-0.370	0.273	0.197	0.157	0.086	0.024	-0.014	-0.048	-0.120	-0.181	-0.200	-0.289	-0.360
	1024	0.308	0.205	0.134	0.117	0.023	-0.040	-0.066	-0.137	-0.199	-0.183	-0.293	-0.374	0.296	0.199	0.149	0.112	0.033	-0.017	-0.039	-0.123	-0.178	-0.174	-0.281	-0.366
	4096	0.329	0.197	0.117	0.131	0.021	-0.053	-0.021	-0.126	-0.205	-0.154	-0.283	-0.384	0.309	0.189	0.126	0.126	0.029	-0.032	-0.017	-0.115	-0.186	-0.155	-0.277	-0.377
d_{dRP}	256	0.066	0.045	0.026	-0.113	-0.136	-0.149	-0.280	-0.300	-0.317	-0.464	-0.498	-0.522	0.060	0.064	0.068	-0.089	-0.102	-0.104	-0.253	-0.269	-0.294	-0.455	-0.482	-0.514
	512	0.051	0.040	0.017	-0.088	-0.122	-0.140	-0.252	-0.280	-0.311	-0.432	-0.475	-0.521	0.074	0.059	0.062	-0.075	-0.090	-0.104	-0.236	-0.260	-0.280	-0.402	-0.463	-0.514
	1024	0.063	0.031	0.016	-0.088	-0.120	-0.146	-0.221	-0.274	-0.307	-0.407	-0.476	-0.523	0.082	0.049	0.048	-0.062	-0.091	-0.105	-0.106	-0.248	-0.280	-0.305	-0.465	-0.515
	4096	0.034	0.010	0.004	-0.104	-0.133	-0.149	-0.197	-0.261	-0.301	-0.362	-0.465	-0.520	0.032	0.020	0.028	-0.078	-0.105	-0.115	-0.172	-0.234	-0.275	-0.330	-0.459	-0.516
d_{dSR}	256	0.406	0.341	0.259	0.205	0.141	0.070	0.057	-0.032	-0.083	-0.077	-0.149	-0.224	0.367	0.309	0.243	0.176	0.123	0.074	0.015	-0.019	-0.071	-0.074	-0.141	-0.212
	512	0.478	0.376	0.281	0.256	0.170	0.090	0.087	0.010	-0.069	-0.040	-0.118	-0.208	0.453	0.349	0.254	0.234	0.153	0.085	0.099	0.019	-0.062	-0.042	-0.115	-0.197
	1024	0.525	0.399	0.276	0.310	0.194	0.084	0.114	0.022	-0.069	-0.001	-0.101	-0.205	0.497	0.368	0.259	0.272	0.173	0.086	0.106	0.024	-0.054	-0.006	-0.089	-0.198
	4096	0.584	0.401	0.257	0.347	0.198	0.069	0.152	0.036	-0.074	0.027	-0.088	-0.218	0.562	0.379	0.239	0.323	0.185	0.071	0.136	0.032	-0.067	0.024	-0.081	-0.208
d_{dSC}	256	0.131	0.066	0.020	-0.048	-0.117	-0.152	-0.203	-0.277	-0.322	-0.357	-0.461	-0.519	0.133	0.075	0.068	-0.043	-0.079	-0.102	-0.174	-0.237	-0.298	-0.348	-0.441	-0.511
	512	0.118	0.050	0.014	-0.051	-0.115	-0.146	-0.188	-0.272	-0.320	-0.345	-0.458	-0.527	0.125	0.059	0.061	-0.033	-0.086	-0.109	-0.172	-0.243	-0.296	-0.329	-0.437	-0.515
	1024	0.127	0.041	0.014	-0.035	-0.125	-0.153	-0.185	-0.272	-0.320	-0.329	-0.462	-0.532	0.124	0.048	0.048	-0.029	-0.091	-0.112	-0.157	-0.249	-0.290	-0.314	-0.447	-0.523
	4096	0.111	0.025	0.005	-0.053	-0.125	-0.154	-0.159	-0.261	-0.317	-0.289	-0.452	-0.533	0.099	0.033	0.034	-0.041	-0.101	-0.117	-0.140	-0.237	-0.292	-0.297	-0.446	-0.529
d_{dSR}	256	0.122	0.035	0.011	-0.140	-0.209	-0.177	-0.308	-0.368	-0.350	-0.522	-0.515	-0.535	-0.010	0.023	0.046	-0.043	-0.172	-0.114	-0.273	-0.365	-0.324	-0.450	-0.545	-0.534
	512	0.064	0.027	-0.008	-0.211	-0.184	-0.165	-0.344	-0.335	-0.346	-0.553	-0.532	-0.538	-0.002	0.031	0.054	-0.103	-0.136	-0.184	-0.346	-0.302	-0.318	-0.475	-0.515	-0.537
	1024	0.026	0.005	-0.007	-0.209	-0.153	-0.164	-0.295	-0.317	-0.333	-0.485	-0.502	-0.543	0.011	-0.045	0.043	-0.096	-0.123	-0.118	-0.310	-0.300	-0.295	-0.501	-0.443	-0.532
	4096	0.018	0.005	0.002	-0.158	-0.152	-0.154	-0.328	-0.281	-0.309	-0.485	-0.473	-0.520	-0.039	0.016	0.041	-0.187	-0.119	-0.115	-0.279	-0.253	-0.276	-0.435	-0.468	-0.515
d_{dRW}	256	0.310	0.259	0.198	0.114	0.066	0.017	-0.042	-0.097	-0.141	-0.182	-0.231	-0.294	0.282	0.235	0.198	0.093	0.061	0.028	-0.057	-0.087	-0.123	-0.169	-0.222	-0.275
	512	0.376	0.295	0.228	0.168	0.095	0.041	0.008	-0.063	-0.120	-0.128	-0.198	-0.269	0.337	0.278	0.214	0.149	0.092	0.041	0.013	-0.049	-0.110	-0.124	-0.191	-0.259
	1024	0.429	0.329	0.237	0.265	0.126	0.047	0.040	-0.040	-0.112	-0.083	-0.174	-0.257	0.407	0.303	0.230	0.196	0.117	0.051	0.034	-0.035	-0.093	-0.076	-0.165	-0.230
	4096	0.494	0.355	0.255	0.271	0.154	0.061	0.085	-0.012	-0.098	-0.039	-0.147	-0.248	0.473	0.336	0.244	0.251	0.144	0.065	0.075	-0.014	-0.091	-0.038	-0.140	-0.241
d_{dRW}	256	0.314	0.336	0.335	0.370	0.378	0.399	0.175	0.175	0.187	0.038	0.048	0.065	0.293	0.302	0.277	0.135	0.126	0.133	0.016	0.009	0.027	0.016	0.009	0.027
	512	0.422	0.437	0.426	0.200	0.205	0.201	0.062	0.077	0.087	0.034	0.034	0.034	0.346	0.341	0.324	0.179	0.174	0.198	0.026	0.038	0.061	0.026	0.038	0.061
	1024	0.469	0.465	0.457	0.230	0.229	0.207	0.082	0.093	0.094	0.036	0.036	0.036	0.386	0.380	0.356	0.179	0.179	0.174	0.061	0.075	0.085	0.036	0.057	0.085
	4096	0.469	0.465	0.457	0.230	0.229	0.207	0.082	0.093	0.094	0.036	0.036	0.036	0.438	0.438	0.405	0.210	0.196	0.167	0.083	0.095	0.093	0.036	0.057	0.085
d_{dRWHL}	256	0.258	0.240	0.229	0.273	0.270	0.273	0.282	0.287	0.286	0.268	0.287	0.286	0.265	0.258	0.224	0.257	0.261	0.251	0.265	0.241	0.242	0.242	0.242	0.249
	512	0.324	0.321	0.348	0.138	0.123	0.132	-0.004	-0.010	0.008	0.011	0.011	0.011	0.308	0.293	0.282	0.141	0.137	0.104	-0.011	-0.016	0.004	0.285	0.286	0.227
	1024	0.389	0.385	0.393	0.164	0.154	0.164	0.025	0.031	0.046	0.025	0.031	0.046	0.350	0.342	0.327	0.142	0.135	0.137	0.026	0.030	0.049	0.316	0.306	0.296
	4096	0.276	0.280	0.277	0.118	0.085	0.090	-0.042	-0.033	-0.032	0.262	0.252	0.221	0.099	0.072	0.068	-0.022	-0.048	-0.042	0.061	0.061	0.061	0.061	0.061	0.061

Table 5.17: Bias DGP9: ARFIMA (1,d,0) plus stationary RLS plus additive noise

d	T/\delta	$\phi = 0.0$					$\phi = 0.3$					$\phi = 0.6$													
		0.0	0.2	0.4	0.6	0.79	0.60	0.70	0.79	0.60	0.70	0.79	0.60	0.70	0.79										
<i>d_{IW}</i>	256	0.274	0.205	0.149	0.143	0.098	0.089	0.170	0.195	0.222	0.291	0.332	0.385	0.260	0.203	0.168	0.137	0.093	0.078	0.169	0.179	0.205	0.274	0.327	0.375
	512	0.287	0.215	0.162	0.134	0.084	0.068	0.128	0.164	0.207	0.245	0.310	0.370	0.284	0.213	0.171	0.131	0.082	0.061	0.118	0.146	0.192	0.234	0.300	0.361
	1024	0.320	0.233	0.168	0.148	0.078	0.060	0.100	0.146	0.194	0.206	0.288	0.338	0.309	0.223	0.175	0.139	0.097	0.048	0.097	0.134	0.175	0.198	0.280	0.349
	4096	0.363	0.255	0.181	0.167	0.081	0.046	0.069	0.115	0.178	0.158	0.259	0.318	0.346	0.244	0.183	0.159	0.081	0.040	0.063	0.107	0.165	0.156	0.254	0.337
<i>d_{EPH}</i>	256	0.303	0.226	0.164	0.177	0.119	0.099	0.183	0.197	0.220	0.286	0.328	0.380	0.291	0.223	0.181	0.169	0.115	0.091	0.183	0.178	0.202	0.273	0.320	0.369
	512	0.304	0.219	0.159	0.150	0.066	0.075	0.138	0.167	0.209	0.246	0.313	0.376	0.304	0.218	0.172	0.151	0.095	0.070	0.128	0.147	0.193	0.232	0.300	0.366
	1024	0.328	0.220	0.146	0.161	0.082	0.069	0.108	0.154	0.206	0.207	0.300	0.377	0.346	0.213	0.159	0.154	0.080	0.054	0.105	0.140	0.185	0.200	0.289	0.370
	4096	0.342	0.207	0.124	0.154	0.060	0.065	0.076	0.135	0.207	0.168	0.286	0.385	0.323	0.198	0.132	0.150	0.062	0.047	0.072	0.124	0.188	0.168	0.281	0.379
<i>d_{IP}</i>	256	0.246	0.169	0.115	0.261	0.209	0.185	0.370	0.344	0.338	0.538	0.533	0.537	0.242	0.169	0.121	0.248	0.184	0.147	0.348	0.314	0.316	0.333	0.517	0.531
	512	0.229	0.141	0.085	0.232	0.171	0.160	0.355	0.313	0.323	0.491	0.498	0.529	0.226	0.140	0.096	0.207	0.148	0.129	0.322	0.293	0.301	0.465	0.486	0.534
	1024	0.203	0.108	0.058	0.207	0.163	0.157	0.281	0.292	0.313	0.459	0.490	0.528	0.201	0.112	0.073	0.177	0.132	0.119	0.258	0.267	0.286	0.451	0.480	0.520
	4096	0.133	0.057	0.029	0.159	0.144	0.152	0.228	0.267	0.303	0.389	0.470	0.521	0.129	0.057	0.040	0.137	0.117	0.118	0.205	0.241	0.277	0.388	0.465	0.518
<i>d_{SM}</i>	256	0.531	0.412	0.306	0.391	0.273	0.185	0.355	0.294	0.180	0.334	0.270	0.273	0.508	0.381	0.296	0.378	0.262	0.183	0.338	0.226	0.175	0.388	0.273	0.263
	512	0.518	0.418	0.310	0.361	0.245	0.153	0.258	0.169	0.146	0.241	0.199	0.238	0.518	0.392	0.284	0.340	0.232	0.151	0.262	0.169	0.135	0.239	0.201	0.228
	1024	0.563	0.424	0.295	0.365	0.241	0.132	0.220	0.132	0.117	0.180	0.157	0.224	0.537	0.392	0.277	0.338	0.222	0.128	0.210	0.130	0.106	0.191	0.146	0.215
	4096	0.602	0.416	0.268	0.373	0.223	0.098	0.200	0.095	0.096	0.126	0.117	0.224	0.580	0.393	0.249	0.350	0.209	0.097	0.185	0.091	0.088	0.123	0.110	0.214
<i>d_{AC}</i>	256	0.280	0.202	0.142	0.255	0.211	0.209	0.321	0.329	0.352	0.434	0.495	0.538	0.284	0.197	0.155	0.254	0.196	0.175	0.302	0.299	0.330	0.433	0.476	0.532
	512	0.238	0.148	0.104	0.198	0.182	0.177	0.271	0.306	0.336	0.399	0.480	0.537	0.237	0.154	0.117	0.200	0.158	0.152	0.267	0.281	0.313	0.381	0.459	0.527
	1024	0.209	0.115	0.076	0.168	0.165	0.171	0.244	0.283	0.329	0.365	0.474	0.537	0.206	0.116	0.090	0.159	0.144	0.136	0.220	0.270	0.301	0.353	0.460	0.528
	4096	0.156	0.070	0.043	0.117	0.140	0.159	0.189	0.269	0.320	0.316	0.457	0.535	0.148	0.072	0.054	0.110	0.119	0.124	0.169	0.245	0.296	0.313	0.451	0.531
<i>d_{MP}</i>	256	1.698	0.395	0.369	1.681	0.442	0.277	1.744	0.544	0.421	1.810	0.704	0.574	1.654	0.415	0.191	1.918	0.410	0.312	1.662	1.262	0.376	1.666	0.663	0.582
	512	1.255	0.317	0.338	1.251	0.559	0.340	1.244	0.432	0.384	1.470	0.596	0.580	1.199	0.961	0.135	1.353	0.299	0.285	1.302	0.402	0.376	1.340	0.586	0.562
	1024	0.902	0.465	0.112	0.955	0.245	0.194	1.096	0.402	0.351	0.982	0.573	0.556	0.869	2.195	0.099	0.893	0.240	0.151	0.883	0.339	0.312	1.003	1.551	0.543
	4096	0.415	0.137	0.050	0.646	0.182	0.160	0.533	0.298	0.312	0.622	0.488	0.523	0.444	0.131	0.055	0.451	0.153	0.123	0.499	0.273	0.280	0.607	0.472	0.518
<i>d_{LPW}</i>	256	0.385	0.303	0.229	0.254	0.170	0.118	0.224	0.179	0.178	0.284	0.271	0.313	0.366	0.281	0.230	0.235	0.165	0.120	0.238	0.178	0.163	0.274	0.267	0.293
	512	0.419	0.321	0.246	0.243	0.158	0.099	0.172	0.133	0.150	0.208	0.226	0.280	0.398	0.303	0.234	0.226	0.153	0.096	0.167	0.123	0.138	0.197	0.219	0.272
	1024	0.453	0.345	0.251	0.263	0.163	0.091	0.137	0.103	0.131	0.144	0.193	0.265	0.432	0.320	0.242	0.241	0.154	0.087	0.132	0.098	0.114	0.145	0.183	0.257
	4096	0.506	0.365	0.263	0.290	0.173	0.086	0.129	0.069	0.110	0.090	0.156	0.252	0.486	0.346	0.251	0.271	0.163	0.085	0.119	0.066	0.101	0.089	0.150	0.244
<i>d_{LWV}</i>	256	0.429	0.449	0.449	0.441	0.446	0.458	0.294	0.285	0.287	0.224	0.216	0.203	0.411	0.416	0.387	0.411	0.416	0.387	0.310	0.289	0.283	0.266	0.261	0.250
	512	0.460	0.472	0.464	0.476	0.472	0.464	0.276	0.271	0.260	0.182	0.180	0.168	0.435	0.427	0.400	0.435	0.427	0.400	0.256	0.252	0.236	0.186	0.173	0.170
	1024	0.471	0.476	0.467	0.471	0.476	0.467	0.262	0.255	0.231	0.137	0.132	0.127	0.452	0.450	0.421	0.452	0.450	0.421	0.246	0.227	0.194	0.135	0.131	0.127
	4096	0.388	0.400	0.405	0.400	0.402	0.424	0.263	0.254	0.265	0.212	0.218	0.210	0.379	0.370	0.342	0.379	0.370	0.342	0.280	0.256	0.256	0.249	0.247	0.256
<i>d_{LWVH}</i>	256	0.426	0.442	0.440	0.426	0.442	0.440	0.250	0.244	0.242	0.169	0.178	0.168	0.403	0.397	0.381	0.403	0.397	0.381	0.226	0.227	0.220	0.174	0.170	0.167
	512	0.466	0.469	0.463	0.466	0.469	0.463	0.244	0.242	0.223	0.132	0.126	0.122	0.441	0.440	0.419	0.441	0.440	0.419	0.226	0.216	0.188	0.127	0.125	0.120
	1024	0.400	0.402	0.404	0.400	0.402	0.404	0.263	0.254	0.265	0.212	0.218	0.210	0.388	0.379	0.364	0.388	0.379	0.364	0.259	0.251	0.238	0.206	0.217	0.210
	4096	0.371	0.316	0.282	0.371	0.316	0.282	0.214	0.200	0.197	0.171	0.171	0.168	0.371	0.316	0.282	0.371	0.316	0.282	0.214	0.200	0.197	0.171	0.171	0.168

Table 5.18: RMSE DGP9: ARFIMA (1,d,0) plus stationary RLS plus additive noise

References

- Andrews, D. W. and Sun, Y. (2004). Adaptive local polynomial Whittle estimation of long-range dependence. *Econometrica*, 72(2):569–614.
- Arteche, J. (2004). Gaussian semiparametric estimation in long memory in stochastic volatility and signal plus noise models. *Journal of Econometrics*, 119(1):131–154.
- Arteche, J. (2006). Semiparametric estimation in perturbed long memory series. *Computational Statistics & Data Analysis*, 51(4):2118–2141.
- Byrd, R. H., Lu, P., Nocedal, J., and Zhu, C. (1995). A limited memory algorithm for bound constrained optimization. *SIAM Journal on Scientific Computing*, 16(5):1190–1208.
- Diebold, F. X. and Inoue, A. (2001). Long memory and regime switching. *Journal of Econometrics*, 105(1):131–159.
- Doukhan, P., Oppenheim, G., and Taqqu, M. (2002). *Theory and applications of long-range dependence*. Springer Science & Business Media.
- Faÿ, G., Moulines, E., Roueff, F., and Taqqu, M. S. (2009). Estimators of long-memory: Fourier versus wavelets. *Journal of Econometrics*, 151(2):159–177.
- Frederiksen, P., Nielsen, F. S., and Nielsen, M. Ø. (2012). Local polynomial Whittle estimation of perturbed fractional processes. *Journal of Econometrics*, 167(2):426–447.
- Frederiksen, P. and Nielsen, M. Ø. (2008). Bias-reduced estimation of long-memory stochastic volatility. *Journal of Financial Econometrics*, 6(4):496–512.
- Geweke, J. and Porter-Hudak, S. (1983). The estimation and application of long memory time series models. *Journal of Time Series Analysis*, 4(4):221–238.
- Granger, C. W. and Hyung, N. (2004). Occasional structural breaks and long memory with an application to the S&P 500 absolute stock returns. *Journal of Empirical Finance*, 11(3):399–421.
- Granger, C. W. and Joyeux, R. (1980). An introduction to long-memory time series models and fractional differencing. *Journal of Time Series Analysis*, 1(1):15–29.
- Haldrup, N. and Nielsen, M. Ø. (2007). Estimation of fractional integration in the presence of data noise. *Computational Statistics & Data Analysis*, 51(6):3100–3114.
- Hosking, J. R. (1981). Fractional differencing. *Biometrika*, 68(1):165–176.

- Hou, J. and Perron, P. (2014). Modified local Whittle estimator for long memory processes in the presence of low frequency (and other) contaminations. *Journal of Econometrics*, 182(2):309–328.
- Hurvich, C. M., Moulines, E., and Soulier, P. (2005). Estimating long memory in volatility. *Econometrica*, 73(4):1283–1328.
- Hurvich, C. M. and Ray, B. K. (2003). The local Whittle estimator of long-memory stochastic volatility. *Journal of Financial Econometrics*, 1(3):445–470.
- Iacone, F. (2010). Local Whittle estimation of the memory parameter in presence of deterministic components. *Journal of Time Series Analysis*, 31(1):37–49.
- Kuensch, H. R. (1987). Statistical aspects of self-similar processes. *Proceedings of the first World Congress of the Bernoulli Society*, 1:67–74.
- Lu, Y. K. and Perron, P. (2010). Modeling and forecasting stock return volatility using a random level shift model. *Journal of Empirical Finance*, 17(1):138–156.
- McCloskey, A. (2013). Estimation of the long-memory stochastic volatility model parameters that is robust to level shifts and deterministic trends. *Journal of Time Series Analysis*, 34(3):285–301.
- McCloskey, A. and Hill, J. B. (2017). Parameter estimation robust to low-frequency contamination. *Journal of Business & Economic Statistics*, 35:598–610.
- McCloskey, A. and Perron, P. (2013). Memory parameter estimation in the presence of level shifts and deterministic trends. *Econometric Theory*, 29(06):1196–1237.
- Perron, P. and Qu, Z. (2010). Long-memory and level shifts in the volatility of stock market return indices. *Journal of Business & Economic Statistics*, 28(2):275–290.
- Qu, Z. (2011). A test against spurious long memory. *Journal of Business & Economic Statistics*, 29(3):423–438.
- Qu, Z. and Perron, P. (2013). A stochastic volatility model with random level shifts and its applications to S&P 500 and NASDAQ return indices. *The Econometrics Journal*, 16(3):309–339.
- Robinson, P. M. (1995). Log-periodogram regression of time series with long range dependence. *The Annals of Statistics*, 23:1048–1072.
- Smith, A. (2005). Level shifts and the illusion of long memory in economic time series. *Journal of Business & Economic Statistics*, 23(3):321–335.
- Sun, Y. and Phillips, P. C. (2003). Nonlinear log-periodogram regression for perturbed fractional processes. *Journal of Econometrics*, 115(2):355–389.

- Wenger, K., Leschinski, C., and Sibbertsen, P. (2017). The memory of volatility. Unpublished Manuscript, Department of Economics, University of Hannover.
- Xu, J. and Perron, P. (2014). Forecasting return volatility: Level shifts with varying jump probability and mean reversion. *International Journal of Forecasting*, 30(3):449–463.
- Yamamoto, Y. and Perron, P. (2013). Estimating and testing multiple structural changes in linear models using band spectral regressions. *The Econometrics Journal*, 16(3):400–429.